


Orb



Order Code	Orb.LED.Col Temp.Finish
Example	Orb.XPE.3000K.Polished

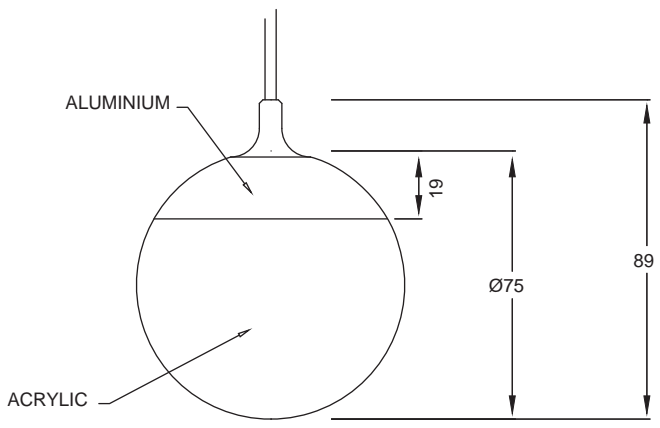

Materials:	Aluminium/Acrylic
Lamp:	MSL Star (XP-E) MSL Star (XT-E) MSL Star (MC-E) MSL Star (XM-L)
IP Rating:	N/A
Finish:	Polished, brushed or anodised aluminium Diffuse acrylic
Dimming:	1-10V, DMX or DALI
Driver:	Remote driver required. MSL Star (XP-E) Allow 2.3W at 700mA or 1.1W at 350mA MSL Star (XT-E) Allow 2.2W at 700mA or 1W at 350mA MSL Star (MC-E) Allow 3.1W at 250mA MSL Star (XM-L) Allow 2.9W at 250mA
Locking:	N/A
Available Tilt:	N/A
Weight:	0.3kg
Description:	Decorative LED based pendant for stand alone use, or integration into a Chandelier
Accessories:	N/A

LED Information



MSL Star (XP-E)
Ø21mm PCB with a single Cree XPE LED. For Ø20mm optics (XPE range).
Colour temperatures of 2800K, 3000K, 3500K, 5000K and 6500K can be specified.
128 lumens at 700mA, 78 lumens at 350mA

Please consult MSL for figures for all other LED boards.

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature.

For driver information see LED driver spec sheet