


Iris




Order Code	Iris.col temp.optic.finish
Example	Iris.2800K.17.9°.Alu

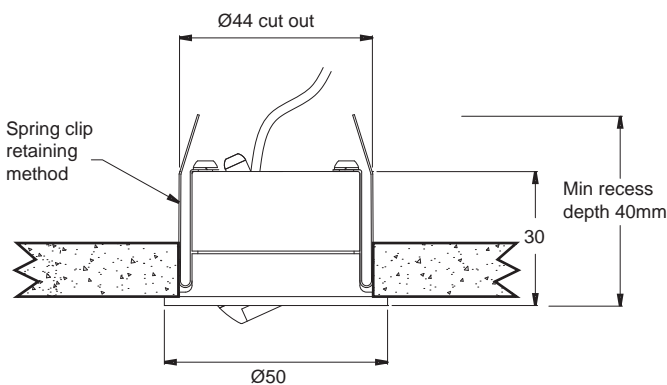

- Materials: Aluminium
- Lamp: MSL Star (1 x Cree XPE)
- IP Rating: IP66 (provided fitting is not pointing upwards)
- Finish: Anodised
- Dimming: 1-10V, DMX or DALI  
(Mains dim available for some set ups but not recommended for single fittings / small numbers)
- Cut out: Ø44mm
- Driver: Remote driver required.  
Allow 2.3W at 700mA or 1.1W at 350mA
- Locking: 1.5mm allen key required
- Available Tilt: ±22°
- Weight: 0.2kg
- Description: IP66 rated eyeball fitting that finishes almost flush with the mount surface. Interchangeable Ø20mm optics
- Accessories: 8.2°, 10.35°, 17.9° or 31.5° optics  
Optional snoots

Snoot Options:

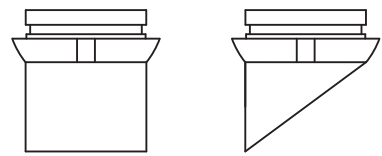

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

Each LED “lamp” consists of one or more CREE XPE power LED thermally bonded to an aluminium cored printed circuit board. Colour temperatures of 2800K, 3000K, 3500K, 5000K and 6500K can be specified as can Amber, Red, Green or Blue.



**MSL Star**  
Ø21mm PCB with a single Cree XPE LED. For Ø20mm optics (XPE range).

For driver information see LED driver spec sheet.