

O Z O N E

Ozone

66 rue Notre Dame de Nazareth
75003 Paris


TECHNICAL DATA : Joseph Dirand Phenix

(please see conditions below)


Done on-line on March 27 2017



DESCRIPTION : Wall lamp. Aluminum and brass structure, golf finish.
Warm white LED sources, 2x12W, 750Lumens.
Converter 500mA outside the lamp, to be placed in a distant box, not included.
Weight: 4kg.
Size: 37x21x13cm.
Compliance: CE Class III

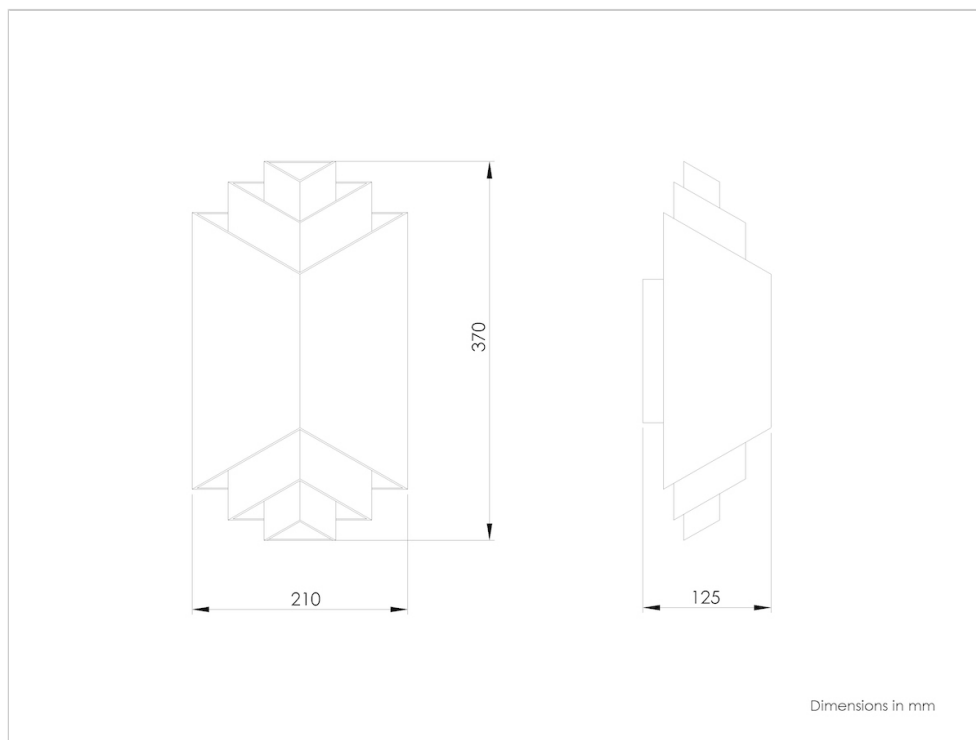

FUNCTION : The lighting provides a very warm indirect light due to the reflections on the gold plates.
The light output is 750 Lumens equivalent to a 75W incandescent bulb. The light intensity can be dimmed from 0 to 100%.
Light is produced by two XICATO brand LED 2700°K, with a CRI=98 and a yield of 90lm/W. Energy performance: A+.

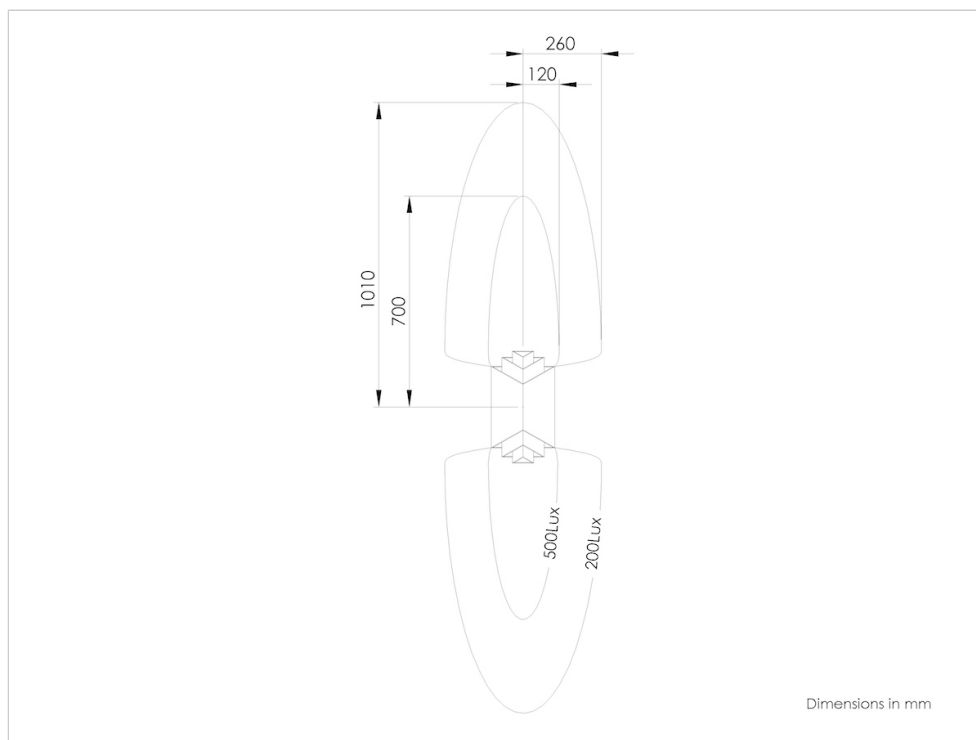

ELECTRICAL CONNECTION : The lighting consumes 2x12W, is supplied without 500mA power supply and is designed to receive a remote power supply 500mA. We recommend the use of power supplies ELDOLED SOLOdrive 361/A which allows optimal 0-10V and 0 to 100% dimming. It must be placed in an accessible and ventilated place. Make sure the cable length between power supply and light and their section apply to the attached diagram. The cables must not cross the screws of the plate.



IMPORTANT:


Remote power supply 500mA.

2 wires for power supply.


0-10V or DALI dimming.


The exit hole must not exceed 30mm.

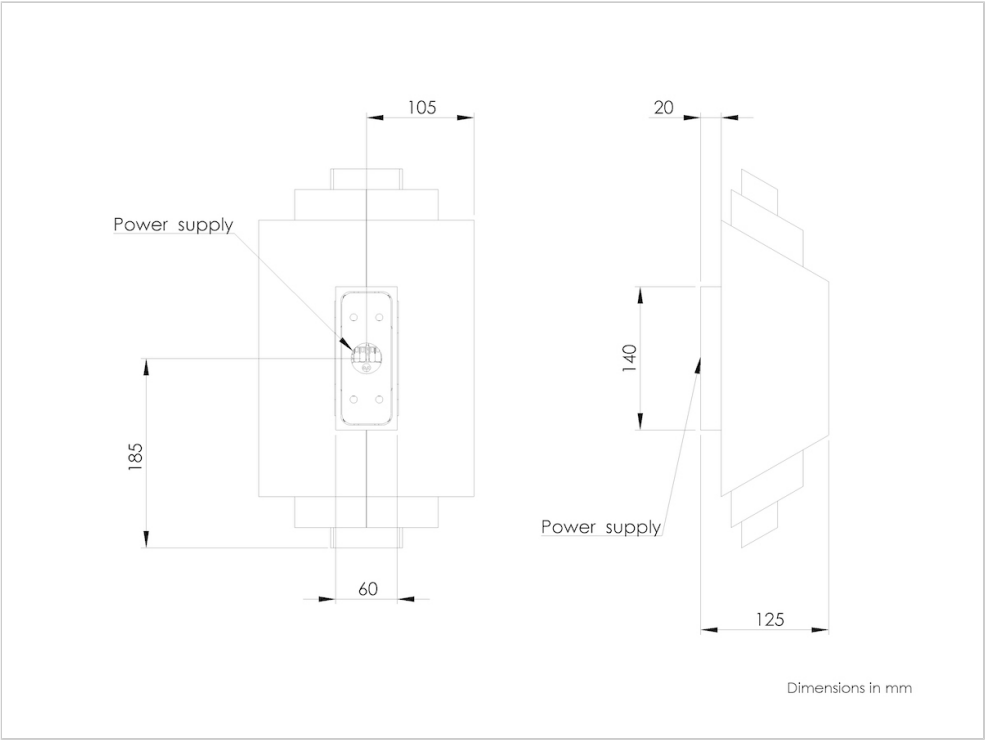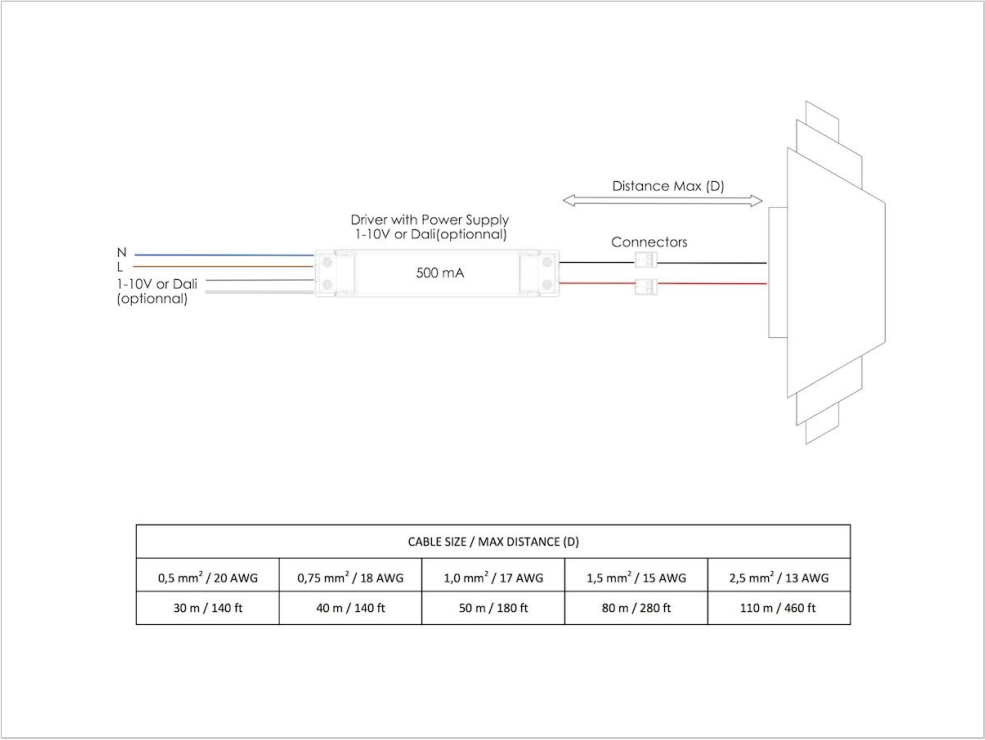

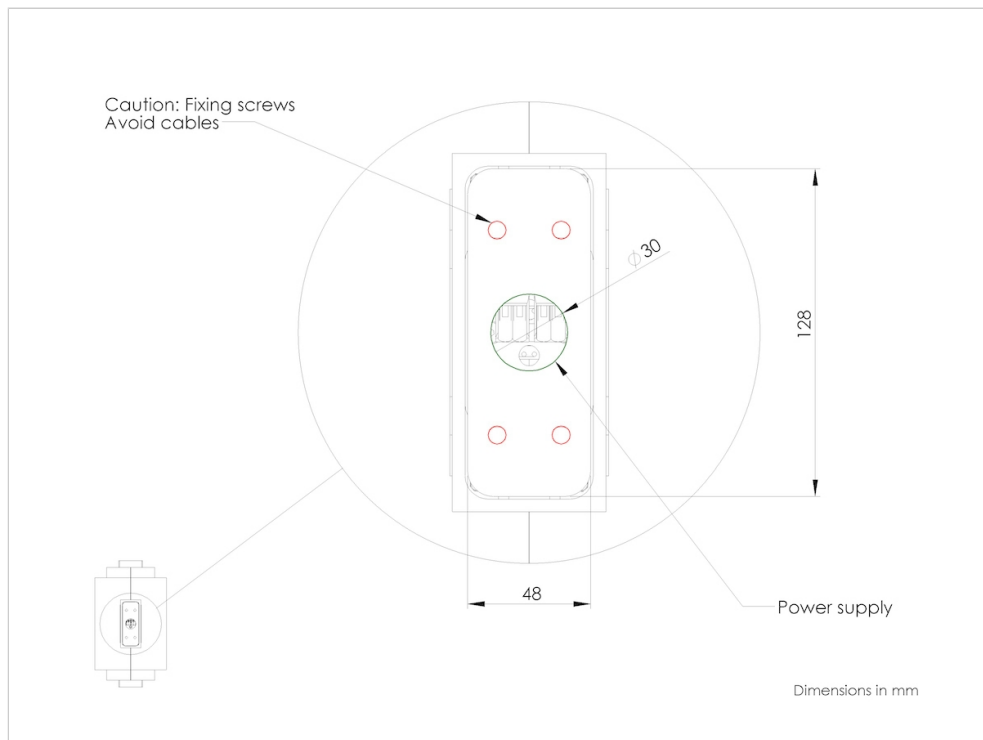

MECHANICAL FASTENING : The fixing of the plate is realized with screws, see map. Use the appropriate method according to the materials on which it will bind. Lamp Weight: 4kg. Drill avoiding electrical cables.

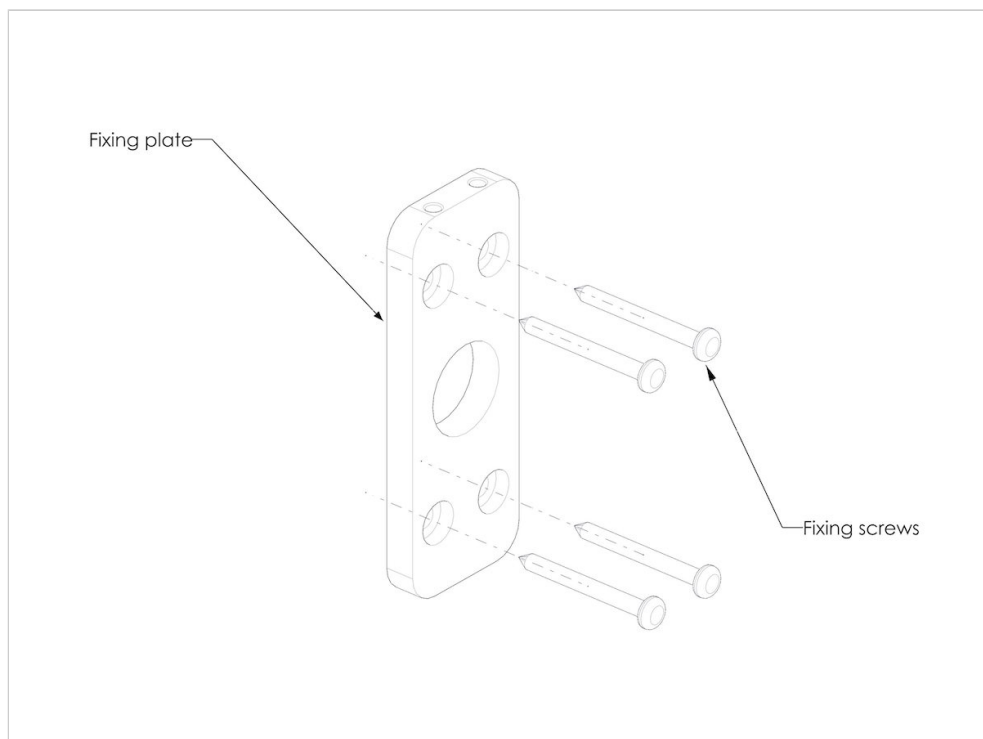


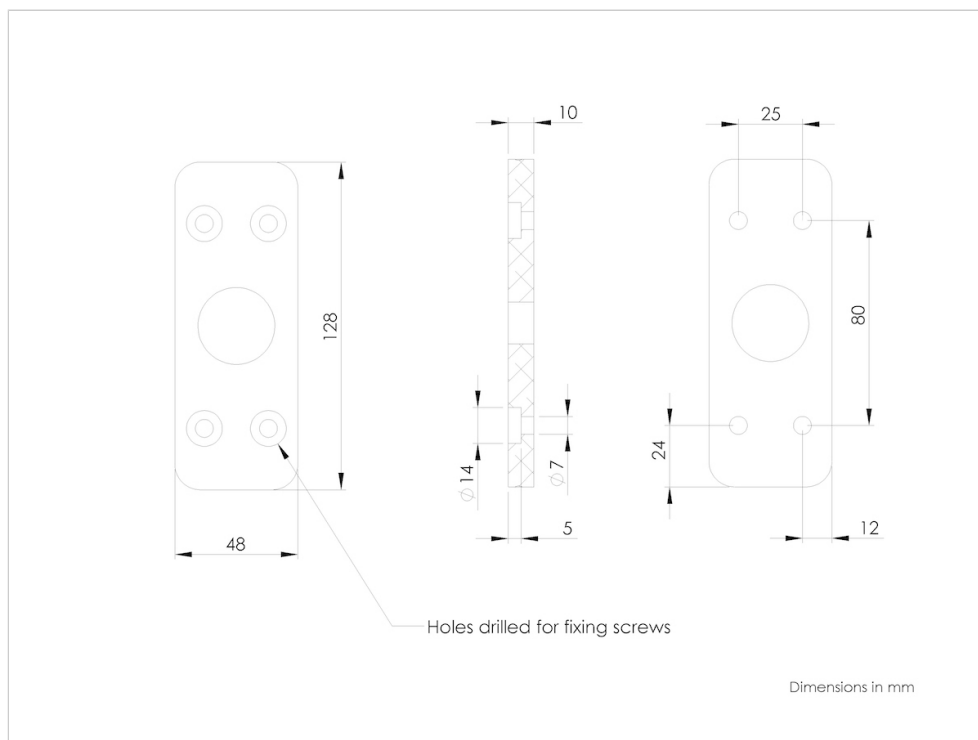


MOUNTING : After disconnecting the power supply, make the electrical connection using the supplied connectors and according to the polarity (red: plus, black: minus). Mount the diffusing shade to the plate using the screws provided following the attached plan.

IMPORTANT:

Use a hexagonal screwdriver of length > 120mm for mounting.

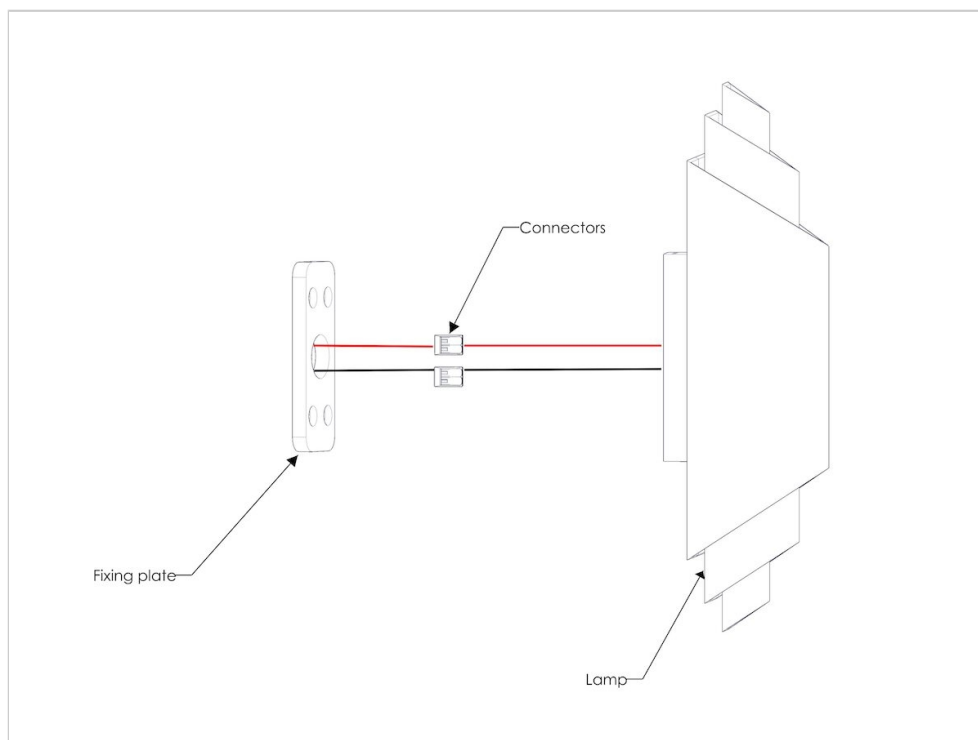


O Z O N E : Joseph Dirand Phenix

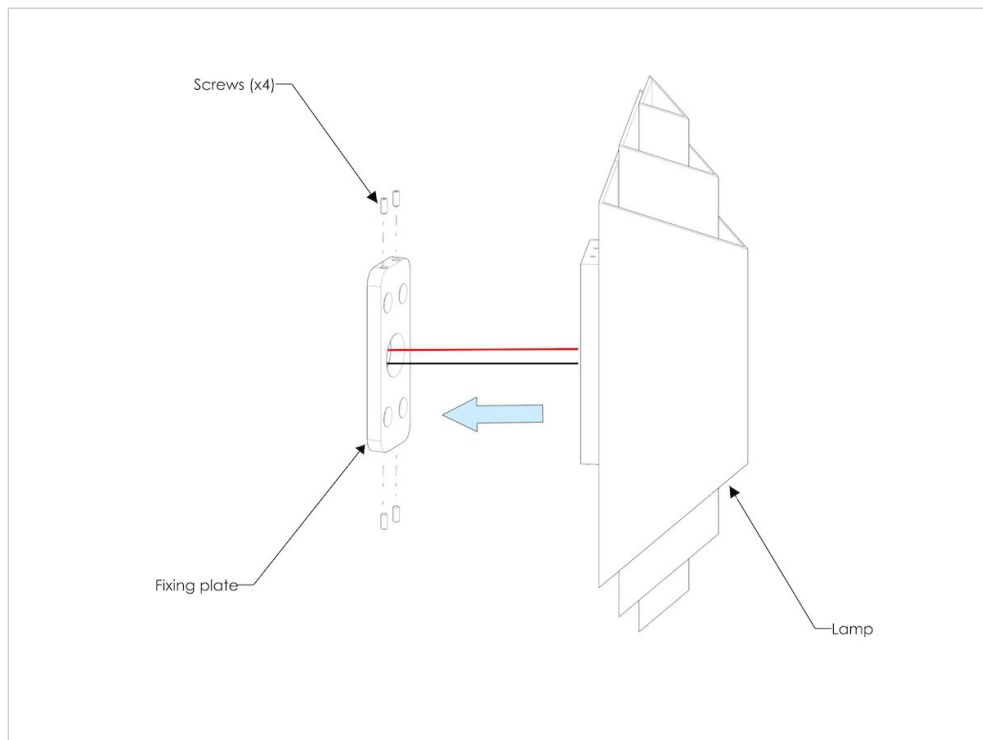

PACKAGING : The lamp is protected by a cardboard, wood and polyurethane foam packaging.

Weight light included: 8kg.

Dimensions: 50x40x25cm.

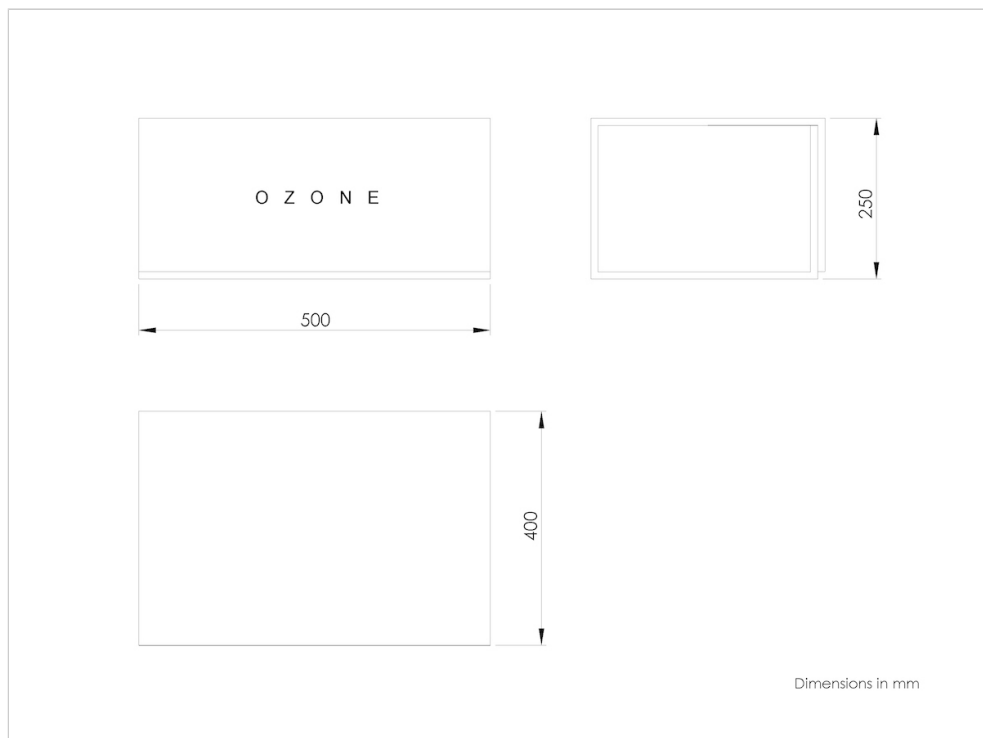

MAINTENANCE : The cleaning is done with a white soft damp cloth. For some traces locally you can use a soft cloth with glass cleaner . Be careful

O Z O N E : Joseph Dirand Phenix

not to touch the LED to avoid damaging them.

