

60 Round Directional Wall Wash LED

whitegoods

Project Title:

Luminaire Ref:

 Press to send

Send form to whitegoods



| Product Codes & Description (Ordering information) | | | | | | |
|--|--|------------------------|--|--|---|---|
| Frame | Led module | Beam ° | Diffuser | Dimming | Voltage | Emergency |
| P60RWWG* plaster-in | XI-H-830-1070* 80 CRI 12.9W Up to 1070 lm | Xicato 40°* | OA* open aperture (see accessories for available options) | ND non-dim 0-10V 0-10 Volt dim 1-10V 1-10 Volt dim TR trailing edge dim DALI DALI protocol | 220-240V standard 120-277V universal | EMND non-dim EMST self-test EMDA DALI |
| | XI-830-780* 80 CRI 8.8W Up to 780 lm | 56° | | | | |
| | XI-H-930-700* 95 CRI 12.4W Up to 700 lm | Citiled 19°* | | | | |
| | XI-930-500* 95 CRI 8.5W Up to 500 lm | 41°* | | | | |
| | CL-930-1000* 97 CRI 13W Up to 1000 lm | | | | | |
| * Items available for Quickship | | | | | | |

Product Description

60mm oval recessed luminaire with trimless ‘plaster-in’ for absolute minimal visual impact. Available with a directional luminaire system.

Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

Dimming

- ND: non-dimming
- 0-10V: 0-10 Volt dimming, min 0.1%
- 1-10V: 1-10 Volt dimming, min 0.1%
- TR: trailing edge dimming
- DALI: DALI protocol, min 0.1%

All drivers are suitable for remote mounting up to 10 meters from fixture. Longer distances are available on request. Additional ceiling depths apply with certain drivers, contact Whitegoods for further details.

Emergency


EMND: emergency non-dimmable
EMST: emergency self-test
EMDA: emergency DALI protocol

Accessories

Accessories are only available when open aperture ‘OA’ option is selected.
AG-50-F: frosted glass
AG-50-C: clear glass
AG-50-S: sculpture glass
AG-50-P: micro prismatic glass
AL-50: louvre

Notes

- Manufacturing LED module detail shown. Refer to photometry data for LM79-08 results.
- All LED modules available in 2700, 3000, 3500 and 4000 Kelvin.
- Xicato and Citiled modules can be underrun.
- Luminaires rated at 40°C maximum ambient temperature.
- Product code containing ‘H’ has a higher frame (140mm) see detail a.
- Minimum ceiling depths for emergency system is required , contact Whitegoods for further details.

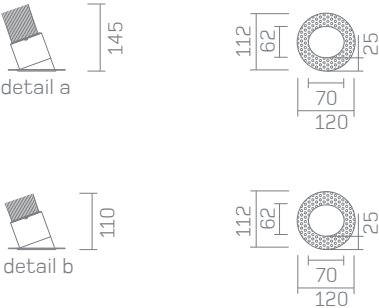

Cut-out

Ø 75 x 80mm

Example LED module codes

XI-830-1070
XI = Xicato
830 = 80CRI, 3000K colour temperature
1070 = up to 1070 lumen package

XI-927-700
XI = Xicato
927 = 95CRI, 2700K colour temperature
700 = up to 700 lumen package

CL-830-1300
CL = Citiled
830 = 80CRI, 3000K colour temperature
1300 = up to 1300 lumen package

Examples of typical output options

Module XI-827/830/840
Run @ 500mA = 1070lm, 12.9W (see detail a)
Run @ 350mA = 780lm, 8.8W (see detail b)

Module XI-927/930/940
Run @ 500mA = 700lm, 12.4W (see detail a)
Run @ 350mA = 500lm, 8.5W (see detail b)

Module CL-827/830/840
Run @ 350mA = 1300lm, 13.2W (see detail b)

Specifier Details

