

# quartuur r

RECESSED DOWNLIGHT

LIGHTSOURCE BY  
**XICATO**




Adjustable rectangular metal downlight.

Available in gray RAL9006 and white RAL9003 tex.

LED source Xicato XSM-XIM.

Available standard in 700 up to 4.000 lm output.

Beam 20°, 40° and 60°.

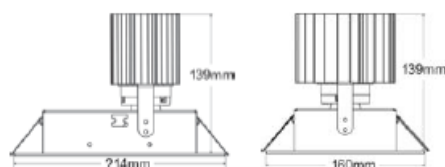

REF A6076 quartuur r

A6077 quartuur r white

LED Xicato XSM/XIM

LED LM OUTPUT 700/1.000/1.300/2.000/3.000/4.000 lm

POWER CONS. according to lm output - see table p. 57

COLOR TEMP. 2.700/3.000/4.000 K

CRI/GAI 80 or +95 / V8030 vibrant

REFLECTOR 20°/40°/60°

FINISH white RAL9003 tex / gray RAL9006

ADJUSTABLE 0°-45°

CUT-OUT 108 x 168 mm

DRIVE CURRENT XSM versions: 1.050 mA

XIM versions: 350/700/1.050 mA

REMARK from 2.000 lm and up active cooling

MODEL	REFERENCE	LUMEN OUTPUT	CRI / COLOR TEMPERATURE	BEAM	DIMMING OPTION
quartuur r quartuur r white	A6076 A6077	700 lm 1.000 lm	8027/9527	20° 40° 60°	PD (phase dimming) ND (non dimmable) AD (dali + 1-10V)
			8030/9530		
			8040/9540		
		1.300 lm 2.000 lm	8027/9527		
			V8030/8030/9530		
			8040/9540		
		3.000 lm	8027		
			V8030/8030		
			8040		
		4.000 lm	8030		ND (non dimmable) AD (dali + 1-10V)
			8040		

ORDER CODE: MODEL N° + LUMEN OUTPUT + CRI / COLOR TEMPERATURE / GAI + BEAM ANGLE + DIMMING OPTION  
F.E.: A6076/700lm/8030/40°/ND

V8030: Vibrant series XSM GAI: 111