


intense

RECESSED DOWNLIGHT

LIGHTSOURCE BY
XICATO

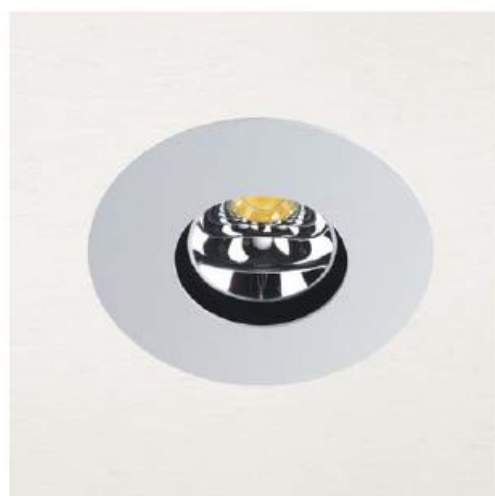


Round metal downlight.

Available in gray RAL9006 and white RAL9003 tex.

LED source Xicato XSM-XIM.

Available standard in 700 up to 4.000 lm output.

Beam 20°, 40° and 60°.



REF A6078 intense

A6079 intense white

LED Xicato XSM/XIM

LED LM OUTPUT 700/1.000/1.300/2.000/3.000/4.000 lm

POWER CONS. according to lm output - see table p. 57

COLOR TEMP. 2.700/3.000/4.000 K

CRI/GAI 80 or +95 / V8030 vibrant

REFLECTOR 20°/40°/60°

FINISH white RAL9003 tex / gray RAL9006

ADJUSTABLE n/a

CUT-OUT 108 x 108 mm

DRIVE CURRENT XSM versions: 1.050 mA

XIM versions: 350/700/1.050 mA

REMARK from 2.000 lm and up active cooling

| MODEL | REFERENCE | LUMEN OUTPUT | CRI / COLOR TEMPERATURE | BEAM | DIMMING OPTION |
|--------------------------|----------------|----------------------|-------------------------|-------------------|--|
| intense intense white | A6078 A6079 | 700 lm 1.000 lm | 8027/9527 | 20° 40° 60° | PD (phase dimming) ND (non dimmable) AD (dali + 1-10V) |
| | | | 8030/9530 | | |
| | | | 8040/9540 | | |
| | | 1.300 lm 2.000 lm | 8027/9527 | | |
| | | | V8030/8030/9530 | | |
| | | | 8040/9540 | | |
| | | 3.000 lm | 8027 | | |
| | | | V8030/8030 | | |
| | | | 8040 | | |
| | | 4.000 lm | 8030 | | ND (non dimmable) AD (dali + 1-10V) |
| | | | 8040 | | |

ORDER CODE: MODEL N° + LUMEN OUTPUT + CRI / COLOR TEMPERATURE / GAI + BEAM ANGLE + DIMMING OPTION
E.E.: A60**/700lm/8030/40°/ND

V8030: Vibrant series XSM GAI: 111