

150 Square Floor Wash LED

whitegoods

Project Title: \_\_\_\_\_

Luminaire Ref: \_\_\_\_\_

 **Press to send**

Send form to whitegoods



plaster-in

\* Items available for Quickship

Ordering Information				
Code	Module	Dimming	Voltage	Emergency
<b>P150SCFW*</b> plaster-in <b>B150SCFW*</b> bezel	<b>CL-830-1500*</b> 80 CRI 12.9W 1500 lm	<b>ND</b> non-dim <b>0-10V</b> 0-10 Volt dim <b>1-10V</b> 1-10 Volt dim <b>TR</b> trailing edge dim <b>DALI</b> DALI protocol	<b>220-240V</b> standard <b>120 - 277V</b> universal	<b>EMND</b> non-dim <b>EMST</b> self-test <b>EMDA</b> DALI

### Product Description


A 150mm low level floor wash luminaire with bezel trim or trimless 'plaster-in' for absolute minimal visual impact.


### Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

### Cut-out

170 x 170 mm  
Fixture requires 130mm wall gap for installation.



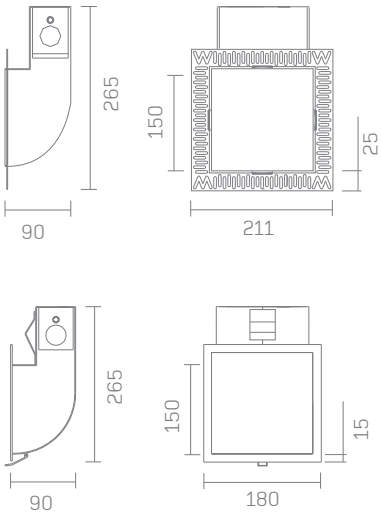

### Example LED module codes

CL-830-1500  
CL = Cited  
830 = 80CRI, 3000K colour temperature  
1500 = up to 1500 lumen package

### Examples of typical output options

CL-827/830/840  
Run @ 350mA = 1525lm, 12.9W

### Note

- Manufacturing LED module detail shown. Refer to photometry data for typical results.
- All LED modules available in 2700, 3000, 3500 and 4000 Kelvin.
- Luminaires rated at 40°C maximum ambient temperature.

Minimum wall gap for emergency system is required , contact Whitegoods for further details.

Specifier Details