

60 Linear Surface Mounted and Suspended LED

whitegoods

Project Title: _____

Luminaire Ref: _____

 Press to send



Send form to whitegoods



surface mount



suspended

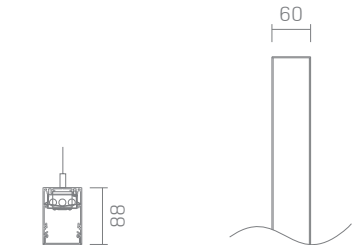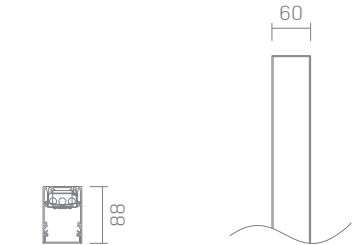

Specifier Details

Product Codes & Description (Ordering information)						
Frame	LED module	Lumens lm/m	Length (mm)	Dimming	Voltage	Emergency
SM60L surface mount SP60L suspended	CC-827 80 CRI	1300* 13.9W per meter	Specify length	ND* non-dim	220-240V standard	EMND non-dim
	CC-830* 80 CRI	1600* 21.0W per meter		0-10V 0-10 Volt dim	120-277V universal	EMST self-test
	CC-840 80 CRI	2400 33.0W per meter		1-10V 1-10 Volt dim DALI DALI protocol		EMDA DALI

* Items available for Quickship

Product Description

A 60mm continuous surface mounted or suspended downlight with minimal visual impact.Can be specified to any desired length.

Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

Example LED module code

CC-830-1600
CC = Whitegoods constant current LED
830 =80CRI, 3000K colour temperature
1600 = up to 1600 lumen per meter

Examples of typical output options

Module: CC-827/830/835/840
Run @ 500mA = 1300lm/m, 13.9W/m
Run @ 700mA = 1600lm/m, 21W/m
Run @ 1050mA = 2400lm/m, 33W/m

Data shown is delivered lumens [3000K]

Dimming (Driver integral)

- ND: non-dimming
- 0-10V: 0-10 Volt dimming, min 1%
- 1-10V: 1-10 Volt dimming, min 1%
- DALI: DALI protocol, min 1%

Emergency

EMND: emergency non-dimmable
EMST: emergency self-test
EMDA: emergency DALI protocol

Note

- Indicative LED information shown. Refer to photometry data for typical results.
- All LED boards available in 2700, 3000, 3500 and 4000 Kelvin.
- Luminaires rated at 40°C maximum ambient temperature.

Please contact Whitegoods for further LED specifications.