

Project Title: _____

Luminaire Ref: _____

 Press to send


Send form to whitegoods



plaster-in



bezel

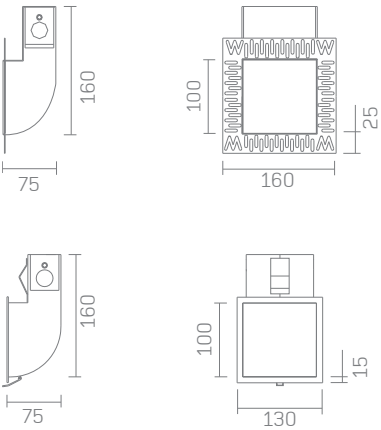

Product Codes & Description (Ordering information)				
Frame	LED module	Dimming	Voltage	Emergency
P100SCFW* plaster-in B100SCFW* bezel	CL-830-600 80 CRI 6.4W 600 lm	ND non-dim 0-10V 0-10 Volt dim 1-10V 1-10 Volt dim TR trailing edge dim DALI DALI protocol	220-240V standard 110V universal	EMND non-dim EMST self-test EMDA DALI

* Items available for Quickship

Product Description

A 100mm high level ceiling wash luminaire with absolute minimal visual impact.

Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

Cut-out

115 x 115 mm
Fixture requires 80mm wall gap for installation.



Example LED module code

CL-830-600
CL = Citiled
830 = 80CRI, 3000K colour temperature
600 = up to 600 lumen package

Examples of typical output options

Module CL-827/830/840
Run @ 350mA = 579lm, 6.4W

Dimming

- ND: non-dimming
- 0-10V: 0-10 Volt dimming, min 0.1%
- 1-10V: 1-10 Volt dimming, min 0.1%
- TR: trailing edge dimming
- DALI: DALI protocol, min 0.1%

All drivers are suitable for remote mounting up to 10 meters from fixture. Longer distances are available on request. Additional ceiling depths apply with certain drivers, contact Whitegoods for further details.

Emergency

EMND: emergency non-dimmable
EMST: emergency self-test
EMDA: emergency DALI protocol

Notes

- Manufacturing LED module detail shown. Refer to photometry data for LM79-08 results.
- All LED modules available in 2700, 3000, 3500 and 4000 Kelvin.
- Luminaires rated at 40°C maximum ambient temperature.

Minimum wall gap for emergency system is required , contact Whitegoods for further details.

Specifier Details