


XACARA™ SQ

WEB PIN™ 271

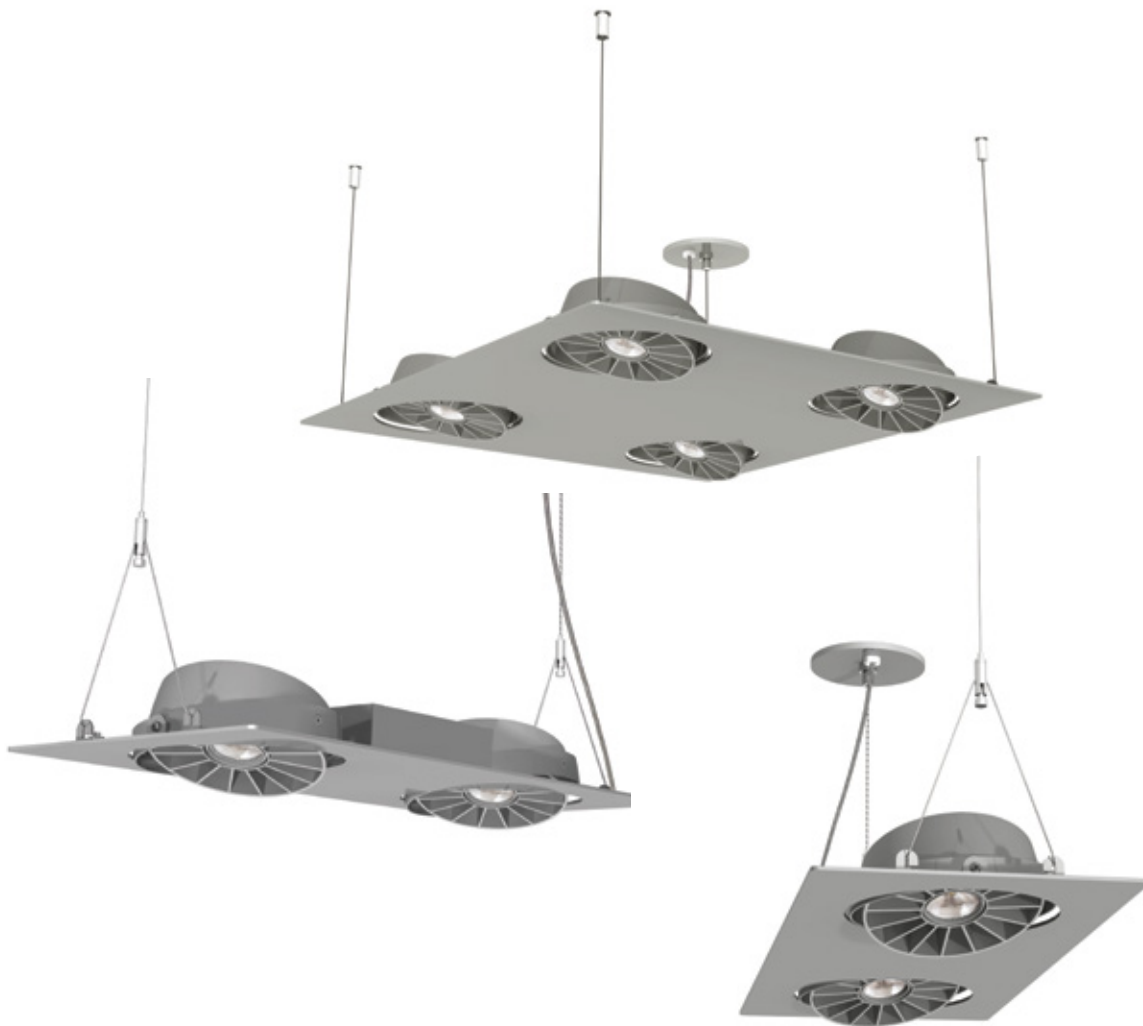

GENERAL SPECIFICATION

Body and trim: Steel and aluminium.

Array housings: Die cast aluminium.

Gimbal: Fully articulating on two axes.

Suspension: Two or four cables, fully adjustable.

Reflectors: Highly reflective, specular finish, vacuum plated.

Protective lens: Clear glass.

Power cable: Silver braided.

Finish: Powder coated, as specified.

Drivers: HPF electronic for 120-277V. 0-10V dimming (10%).

Approvals: ETL/US, ETL/C, CE.

DIRECT/INDIRECT ILLUMINATION PENDANT

A SPECIFY LUMINAIRE

| Code: | Power: | *Delivered lms: | *Efficacy LPW: | CBCP: | L70 @25°C (77°F): |
|----------------|-------------|-----------------|----------------|-------|-------------------|
| 50 1250 | 2 x 26W LED | 2 x 2085 | 80 | 4104 | > 60,000 |
| 50 1260 | 4 x 26W LED | 4 x 2085 | 80 | 4104 | > 60,000 |

B SPECIFY CCT/CRI

- 30A** 3000K (min 80 CRI)
- 30B** 3000K (min 90 CRI)
- 35A** 3500K (min 80 CRI)
- 35B** 3500K (min 90 CRI)
- 40A** 4000K (min 80 CRI)
- 40B** 4000K (min 90 CRI)

C SPECIFY REFLECTOR

- ME** Medium 36°
- XW** Extra wide 70°

D SPECIFY FINISH

- BL** Black
- MS** Metallic Silver
- WH** White

**approx values based on 3000K (min 80 CRI)*

Example Specification Code: 50 1250 • 30A • ME • BL

Photometric testing performed using LM79 procedures.

