

ZEDOS™ PM

WEB PIN™ 122



GENERAL SPECIFICATION

Body and trim: Steel and aluminium.

Suspension: Single tube with four decorative tubes.

Finish: Gear tray, powder coated gloss white. Trim, powder coated or plated as listed.

Diffusers: Acrylic.

Dust covers: Clear polycarbonate.

Drivers: HPF, electronic, 0-10V, 10% dimming standard.

Remote emergency system: Emergency option provides a 1.5 hour emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (maximum distance between wall/ceiling plate and luminaire is 4.5m/15'). Test switch fits a single gang box (not supplied).

Approvals: ETL.



A SPECIFY LUMINAIRE


Code:	Power:	*Delivered lms:	*LPW:	L70 @25°C (77°F):	Diameter (A):	Diameter (B):	Depth (D):	Height (H):	Height (A):	Photometry:
68 7110	150W LED	15439	103	> 50K hrs	737mm/29"	145mm/5.7"	165mm/6.5"	610mm/24"	26mm/1"	File# 687110
68 7120	211W LED	22631	107	> 50K hrs	940mm/37"	145mm/5.7"	178mm/7"	610mm/24"	26mm/1"	File# 687120
68 7130	282W LED	30043	107	> 50K hrs	1194mm/47"	200mm/7.9"	229mm/9"	749mm/29.5"	45mm/1.75"	File# 687130

B SPECIFY CCT

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)

C SPECIFY FINISH

WH	White
MB	Metallic bronze
MS	Metallic silver
PC	Polished chrome
SB	Satin brass
SC	Satin chrome
SN	Satin nickel
OT	Other painted finish (please specify an RAL number)

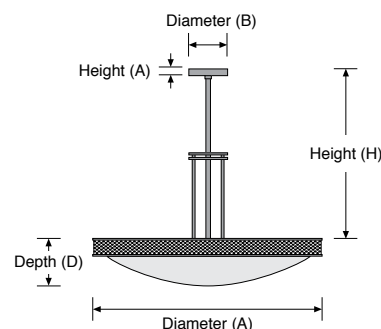

D SPECIFY DIFFUSER

OP	Opal
FB	Beige faux alabaster
FW	White faux alabaster

E SPECIFY OPTIONS

RE	Remote emergency (max distance 10 ft)
CB	Cradle bars
SW	Swivel canopy (42°)
DA	DALI drivers
DX	DMX drivers
S1	152mm/6" additional suspension length
S2	304mm/12" additional suspension length
S3	456mm/18" additional suspension length
S4	608mm/24" additional suspension length

*approx values based on 3000K (min 80 CRI)

Example Specification Code: **68 7110 • 30 • PC • OP**