



GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Suspension: Single tube with three support cables.

Finish: Gear tray, powder coated gloss white. Trim, powder coated or plated as listed.

Diffusers: Acrylic.

Dust covers: Clear polycarbonate.

Drivers: HPF electronic, 120/277V (EU-240V). 0-10V, 1% dimming standard.


Mechanical: Luminaires mount directly over a junction box (by others - North America only).

Remote Emergency: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).


L70 @25deg C (77deg F): > 50,000 hrs.

**Delivered lms & *LPW based on 3000K (min 80 CRI).*


MOUNTING & OPTICS




Suspended
Direct/Indirect




12 7010




12 7020



12 7030



12 7040



12 7050

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Power (LED):	Delivered lms:	LPW:	Diameter (A):	Depth (D):	Height (H):
12 7010	128W	12714	100	584mm/23"	178mm/7"	445mm/17.5"
12 7020	149W	15439	104	737mm/29"	229mm/9"	584mm/23"
12 7030	170W	19334	114	838mm/33"	229mm/9"	584mm/23"
12 7040	283W	30973	109	1156mm/46"	305mm/12"	584mm/23"
12 7050	350W	38150	109	1422mm/56"	457mm/18"	749mm/29.5"

B SPECIFY CCT

30	3000K (<i>min 80 CRI</i>)
35	3500K (<i>min 80 CRI</i>)
40	4000K (<i>min 80 CRI</i>)

C SPECIFY FINISH

WH	White
MB	Metallic Bronze
MS	Metallic Silver
AB	Antique Brass
PB	Polished Brass
SB	Satin Brass
PC	Polished Chrome
SN	Satin Nickel
F39	Other painted finish (<i>RAL number required</i>)
F40	Other Non-RAL painted finish (<i>sample chip required</i>)

Additional Information

F39 & F40 have a one time set-up charge regardless of quantity.

D SPECIFY DIFFUSER

OP	Opal
FB	Beige Faux Alabaster
FW	White Faux Alabaster

E SPECIFY DIMMING

DA	DALI Drivers
DX	DMX Drivers

F SPECIFY OPTIONS

RE	Remote Emergency (<i>max distance 10ft, 120/277V</i>)
CB	Cradle Bars
SW	Swivel Canopy (<i>42 Degrees</i>)


G SPECIFY SUSPENSION LENGTHS

- S1 152mm/6" additional suspension length
- S2 304mm/12" additional suspension length
- S3 456mm/18" additional suspension length
- S4 608mm/24" additional suspension length

EXAMPLE CODE

127010/35/WH/OP

DIMENSIONAL DIAGRAMS

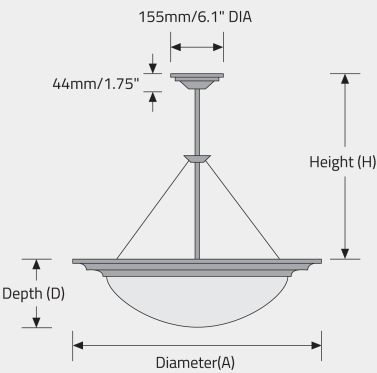

APPROVALS

