



## GENERAL SPECIFICATION

**Body and trim:** Steel and aluminum.

**Finish:** Powder coated metallic silver.

**Suspension:** Twin aircraft cables.

**Power cable:** Silver braided.

**Refractor:** High temperature clear prismatic acrylic.

**Decorative disc:** 6mm/0.25" glass with a polished edge and a sandblasted finish.

**Decorative ring:** 6mm/0.25" green tint, acrylic (faux glass) with a polished edge and a sandblasted finish.

**Drivers:** HPF electronic, 120/277V (EU-240V), 0-10V, 1% dimming standard.

**Remote Emergency:** Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

**Mechanical:** Luminaires mount to a junction box (by others - North America only).


**L70 @25deg C (77deg F):** > 50,000 hrs.

**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI).


MOUNTING & OPTICS




Suspended Direct




20 1250



20 1821



20 2270



20 2274

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Power (LED):	Delivered lms:	LPW:	Height (H):	Diameter (D):	Weight:
20 1250	30W	1703	60	520mm/20.5"	318mm/12.5"	9Kg/20lb
20 1821	57W	6187	109	559mm/22"	406mm/16"	9Kg/20lb
20 2270	70W	7607	109	686mm/27"	559mm/22"	10Kg/22lb
20 2274	100W	10867	109	686mm/27"	559mm/22"	11Kg/24lb

B SPECIFY CCT

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)

C SPECIFY DECORATIVE OPTIONS

DE	Decorative Disc (suspended by four cradle bars)
DS	Decorative Disc (suspended by four spacers)
RG	Decorative Ring (suspended by four cradle bars)
RR	Decorative Ring (suspended by four spacers)


D SPECIFY OPTIONS

WR	White Refractor
RE	Remote Emergency (max distance 15ft, 120/277V, not available with 347V)
3	347V (22" diameter only, not available with Remote Emergency)

EXAMPLE CODE

201250/40
-----------

DIMENSIONAL DIAGRAMS

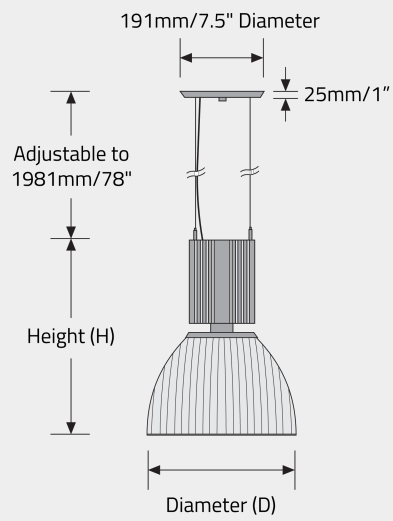

APPROVALS

