



GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffusers: Opal polycarbonate.

Drivers: Integral, HPF electronic drivers for 120-277V, 0-10V, 10% dimming standard.


Mechanical: Luminaires mount directly over J box (by others).

Approvals: ETL.

WHITE LED DIRECT ILLUMINATION

A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power:	*Delivered lms:	*Efficacy LPW:	L70 @25°C (77°F):	Photometry:
97 0020	610mm/24"	65W LED	6009	92	> 50,000 hrs	File# 970020
97 0030	914mm/36"	161W LED	15561	96	> 50,000 hrs	File# 970030
97 0040	1219mm/48"	316W LED	30592	97	> 50,000 hrs	File# 970040



B SPECIFY CCT

- 30** 3000K (min 80 CRI)
- 35** 3500K (min 80 CRI)
- 40** 4000K (min 80 CRI)

C SPECIFY SUSPENSION

- S1** Vertical suspension
- S2** Hub suspension

D SPECIFY FINISH

- WH** White
- MS** Metallic silver


*approx values based on 3000K (min 80 CRI)

Example Specification Code: **97 0020 • 35 • S1 • WH**

WHITE LED DIRECT & INDIRECT ILLUMINATION

A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power:	*Direct lms:	*Indirect lms:	*Efficacy LPW:	L70 @25°C (77°F):	Photometry:
97 0120	610mm/24"	94W LED	5770	3418	98	> 50,000 hrs	File# 970120
97 0130	914mm/36"	218W LED	15211	6621	100	> 50,000 hrs	File# 970130
97 0140	1219mm/48"	372W LED	29903	6659	98	> 50,000 hrs	File# 970140



B SPECIFY CCT

- 30** 3000K (min 80 CRI)
- 35** 3500K (min 80 CRI)
- 40** 4000K (min 80 CRI)

C SPECIFY SUSPENSION


- S1** Vertical suspension
- S2** Hub suspension

D SPECIFY FINISH

- WH** White
- MS** Metallic silver

*approx values based on 3000K (min 80 CRI)

Example Specification Code: **97 0120 • 35 • S1 • WH**

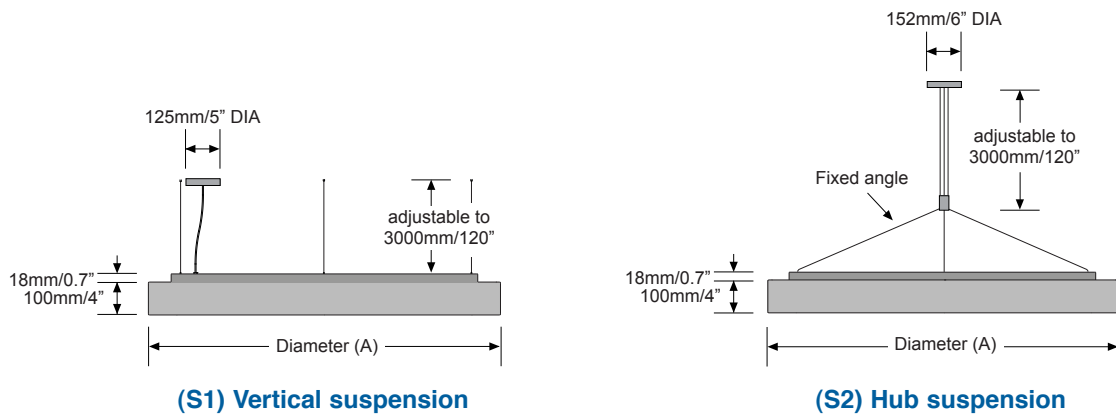

Note: Due to constant changes in LEDs, please check our website for current product specifications.