


FXD Type S



Order Code	FXD.S.Finish.Optic.Col Temp
Example	FXD.S.Alu.24°.3000K

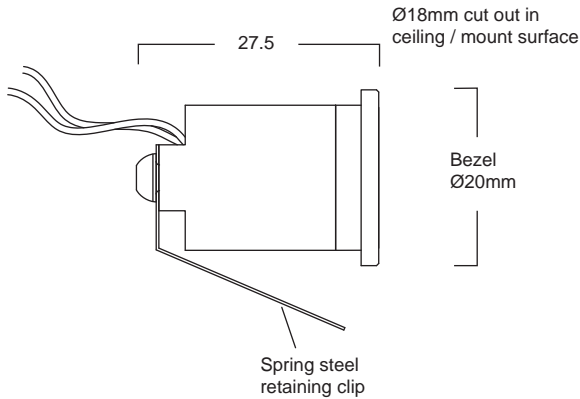


Materials:	Aluminium
Lamp:	Type S (1 x Cree XPE LED)
Finish:	Anodised aluminium
Dimming:	1-10V, DMX or DALI
Driver:	Remote driver required. 350mA max
Locking:	N/A
Available Tilt:	Fixed
Weight:	15g
Description:	Tiny IP65 rated fixed focus 1 x LED (Cree XPE) up or downlight.
Accessories:	Ø10mm optics

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

The Type S PCB uses 1 x Cree XPE power LED thermally bonded to an FR4 gold coated PCB, heat sunk by means of gold vias. Colour temperatures of 2800K, 3000K, 3500K and 6500K can be specified as can amber, red, green or blue.

Type S



For driver information see LED driver spec sheet.