


Module Type M



Order Code	Module.M.col temp.optic.finish
Example	Module.M.2800K.12°.RAL9006


Materials:	Aluminium
Lamp:	Type M LED PCB
IP Rating:	IP66
Finish:	Anodised aluminium or painted to any RAL colour
Dimming:	1-10V or DMX
Driver:	Remote driver required. Allow 6.9W at 700mA, 3.2W at 350mA
Locking:	Fixed
Available Tilt:	Fixed
Weight:	0.25kg
Description:	LED module for 3 x LED PCB, fixing by stud at 30mm centres
Accessories:	Ø20mm optics

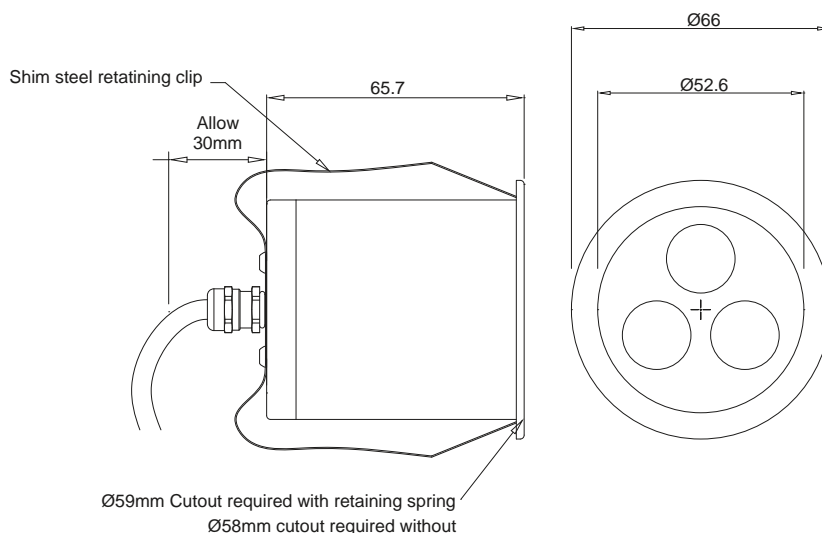

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

The Type M "lamp" consists of three CREE XPE power LED thermally bonded to an aluminium cored printed circuit board. Colour temperatures of 2800K, 3000K, 3500K, 5000K and 6500K can be specified as can Amber, Red, Green, Blue or any combination of these.



Type M

Ø49mm PCB with three LEDs on a single circuit. For XPE optics.

For driver information see LED driver spec sheet.
For more optic information see Optic spec sheet.