

66 rue Notre Dame de Nazareth 75003 Paris


TECHNICAL DATA : Classique V

(please see conditions below)

Done on-line on March 27 2017




66 rue notre dame de Nazareth 75003 Paris Tel+33 (0)1 53 01 93 01. information@ozonelight.com. www.ozonelight.com SARL au capital de 37.000 . RCS PARIS B 434 300 547 Siret 434 300 547 000 32. APE 2740 Z. TVA FR 78 434 300 547 DESCRIPTION : Chandelier. Structures in aluminium and brass. Finishes are mirror nickel or gun metal. The shade is in white polycarbonate with paper diffusion material. Warm white LED down lighting, 220W, 11000Lumens. Converter 24V outside the lamp, to be placed in a distant box, not included. Weight: 60kg. Size: 120x120x13cm + Height of the hanging structure. Compliance: CE Class III.

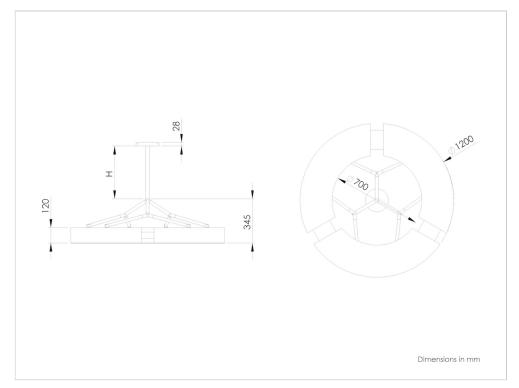

 $\ensuremath{\mathsf{FUNCTION}}$: The lighting provides a diffusing down light, softening the shadows.

The light output is 11000 Lumens equivalent to a 11x100W incandescent bulb. The light intensity can be dimmed from 0 to 100%. A warm light is produced by ATEA brand LED 2200°K, with a CRI>95 and a yield of 751m/W. Energy efficiency: A+.

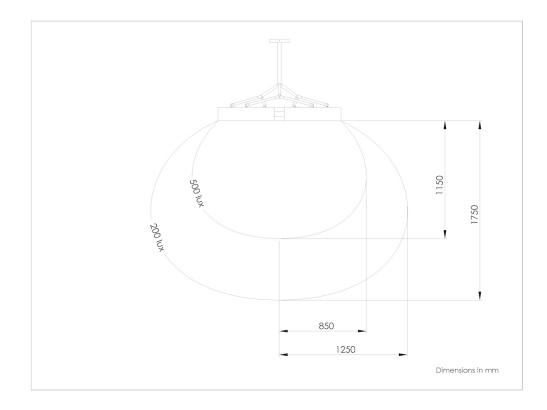



ELECTRICAL CONNECTION : The lighting consumes 220W, is supplied without 24V power supply and is designed to receive 3 remote constant voltage power supply 24V. We recommend the use of 3 power supplies MEANWELL PLC-100-24 with ELDOLED LINEARdrive 211D driver witch allows optimal 0-10V dimming from 0 to 100%. They must be placed in an accessible and ventilated place.


Make sure the cable length between power supply and light and their section apply to the attached diagram.

The cables must not cross the screws of the plate.

IMPORTANT: Remote power supply 24V. 6 wires for power supply. 0-10V or DALI dimming. Height of the hanging structure.

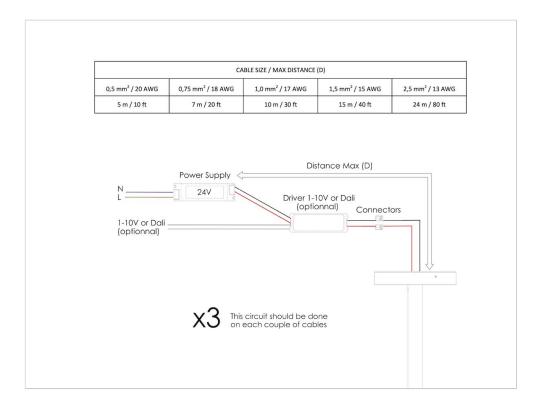


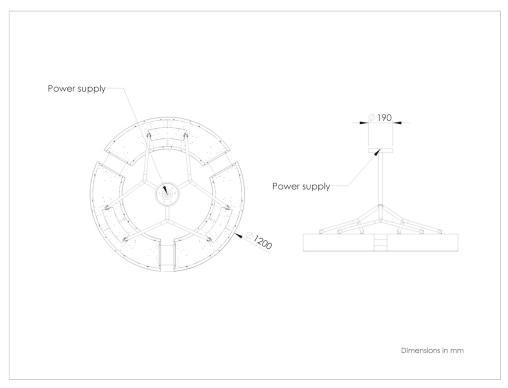


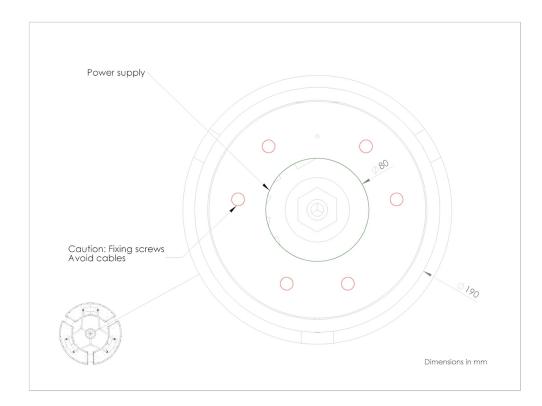


MECANICAL FASTENING : If necessary please reinforce the ceiling at the plate. Make sure that the ceiling is straight. The fixing of the plate is realized with screws, see map. Use the appropriate method according to the materials on which it will bind. Lamp Weight: 60kg. Drill avoiding electrical cables.


IMPORTANT: If necessary please reinforce the ceiling at the plate. Weight: 60kg. Make sure that the ceiling is straight.

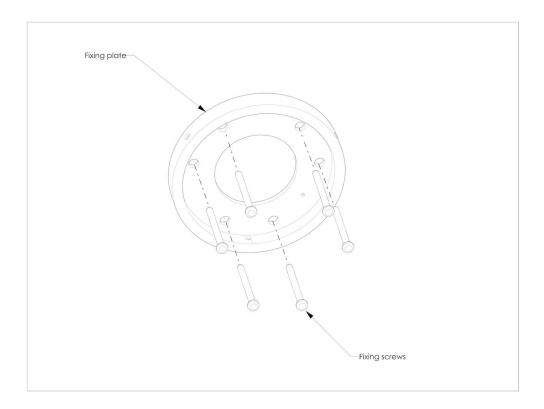

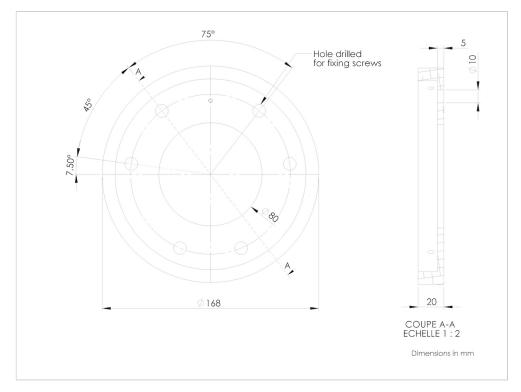



MOUNTING :

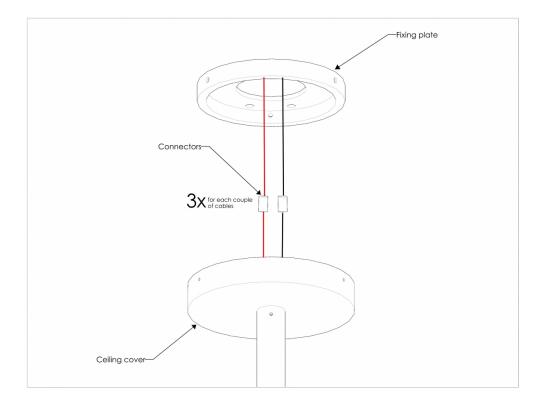


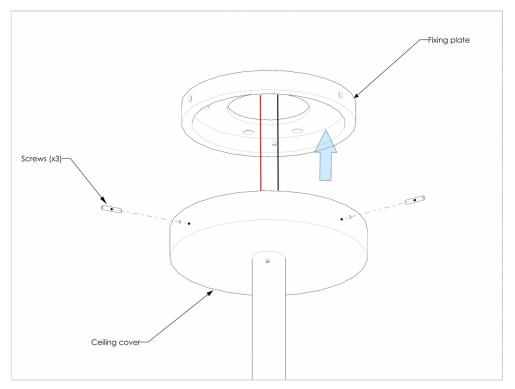

PACKAGING : The lamp is protected by 2 cardboard, wood and polyethylene+polyurethane foam packaging. Weight light included: 80kg + 8kg. Dimensions: 150x150x60cm + Hx30x30cm.

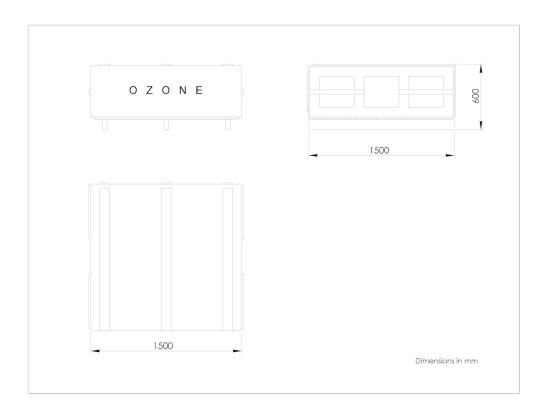

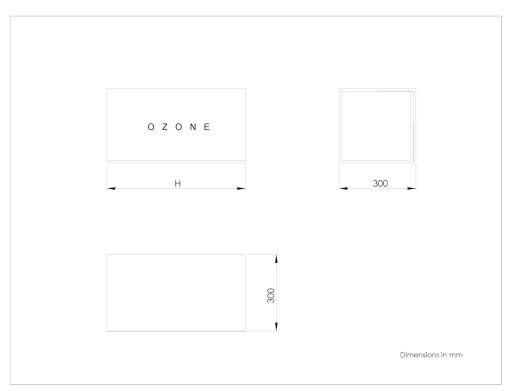

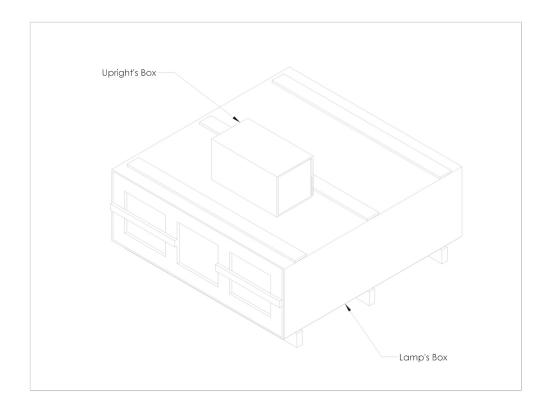

MAINTENANCE : The metal parts cleaning is done with a white soft damp cloth. For some traces locally you can use a soft cloth with glass cleaner. The diffuser cleaning is carried out with a dry cloth. For some traces can be used locally with a soft damp cloth carefully.

