

Category Interior use only IP20

Material Machined Aluminium I Machined Brass

Finish Brushed Aluminium I Rubbed Bronze I Polished Brass I Black I White I Custom

Cutout ø44mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm spacing above module

Tilt 25°

System Power 1.6W

Module Output 140lm

Absolute Output 124lm

LOR 89%

Glare Cut Off 45° in vertical position

Glare Comfort Cut Off 85° in vertical position

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 12°

Gear Type Dimmable options available

Weight AL BK WH - 74g I RB PB - 90g


* Please enquire as to the availability of non-standard Colour Temperatures

Glare Diagram

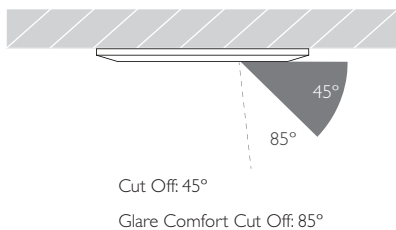


Minimo Tilt is a miniature recessed LED luminaire providing high performance accent lighting from a compact source and offering 25° tilt. Even at full tilt, the luminaire does not protrude from the bezel. With 95CRI, Minimo Tilt is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Tilt is machined from aerospace grade 6063-T6 aluminium and brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

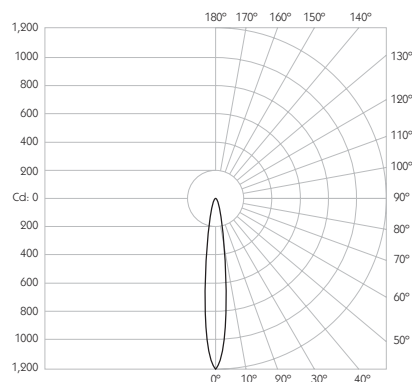

1.6W 12°		3000K LED
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx

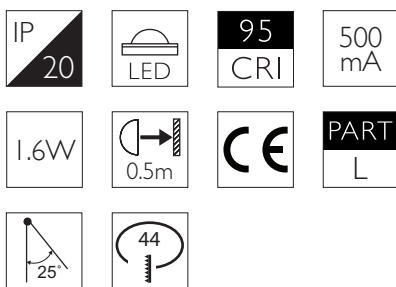

Circular Bezel

RC-621-AL-309512


RC-621-RB-309512

RC-621-PB-309512



RC-621-BK-309512

RC-621-WH-309512



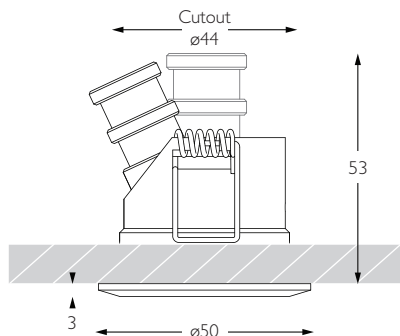

Glare Diagram

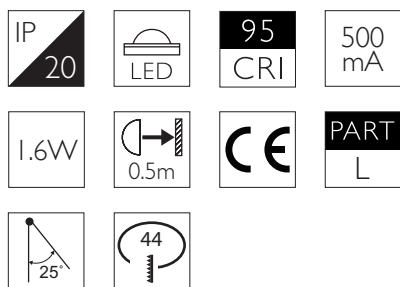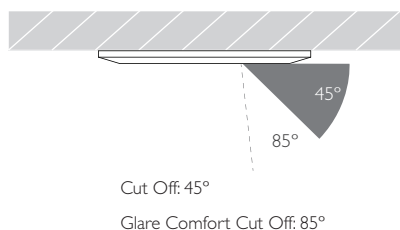

Category Interior use only IP20

Material Machined Aluminium I Machined Brass

Finish Brushed Aluminium I Rubbed Bronze I Polished Brass I Black I White I Custom

Cutout ø44mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm spacing above module

Tilt 25°

System Power 1.6W

Module Output 140lm

Absolute Output 113lm

LOR 81%

Glare Cut Off 45° in vertical position

Glare Comfort Cut Off 85° in vertical position

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optic 30°



Gear Type Dimmable options available

Weight AL BK WH - 74g I RB PB - 90g

* Please enquire as to the availability of non-standard Colour Temperatures

Minimo Tilt is a miniature recessed LED luminaire providing high performance accent lighting from a compact source and offering 25° tilt. Even at full tilt, the luminaire does not protrude from the bezel. With 95CRI, Minimo Tilt is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Tilt is machined from aerospace grade 6063-T6 aluminium and brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

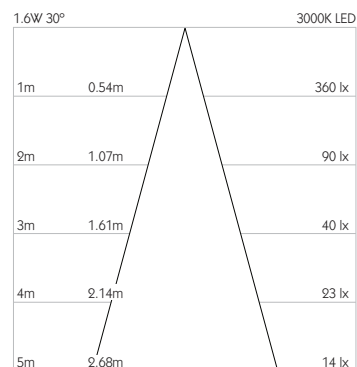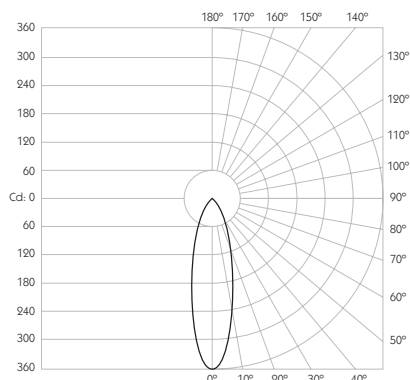

Circular Bezel

RC-621-AL-309530

RC-621-RB-309530


RC-621-PB-309530

RC-621-BK-309530



RC-621-WH-309530



WIDE FLOOD

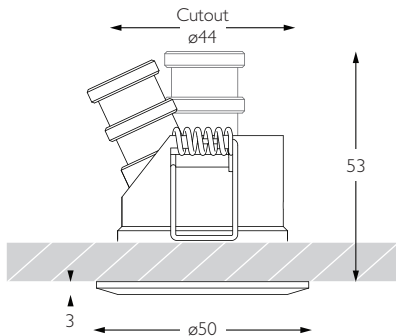

Glare Diagram

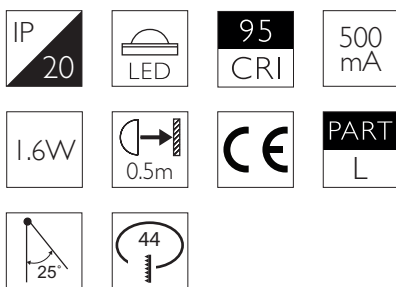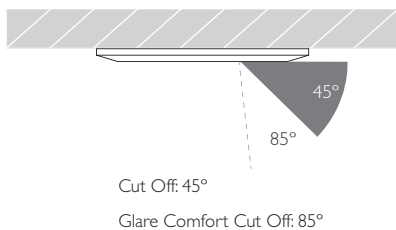

Category Interior use only IP20

Material Machined Aluminium I Machined Brass

Finish Brushed Aluminium I Rubbed Bronze I Polished Brass I Black I White I Custom

Cutout ø44mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm spacing above module

Tilt 25°

System Power 1.6W

Module Output 140lm

Absolute Output 124lm

LOR 89%

Glare Cut Off 45° in vertical position

Glare Comfort Cut Off 85° in vertical position

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optic 60°


Gear Type Dimmable options available

Weight AL BK WH - 74g I RB PB - 90g

* Please enquire as to the availability of non-standard Colour Temperatures

Minimo Tilt is a miniature recessed LED luminaire providing high performance accent lighting from a compact source and offering 25° tilt. Even at full tilt, the luminaire does not protrude from the bezel. With 95CRI, Minimo Tilt is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Tilt is machined from aerospace grade 6063-T6 aluminium and brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

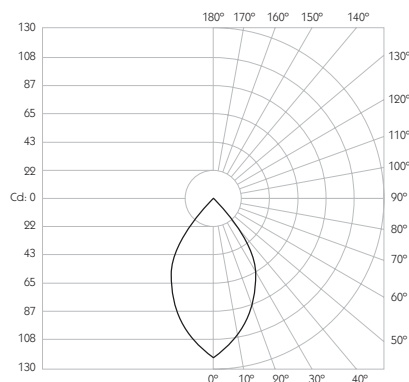

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	125 lx
2m	2.37m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx



Circular Bezel

RC-621-AL-309560

RC-621-RB-309560

RC-621-PB-309560

RC-621-BK-309560

RC-621-WH-309560



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626