



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Integral Monopoint

Lockable Pan & Tilt

Accessories Snoots

System Power 1.6W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12°

Gear Type Dimmable options available



Weight 47g

* Please enquire as to the availability of non-standard CRI and Colour Temperatures.

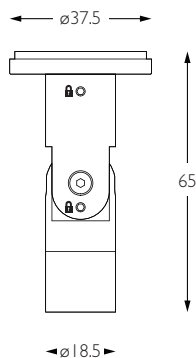


Pico 1 Surface is a discreet 95CRI LED spotlight, based on a minimal aesthetic and small footprint. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

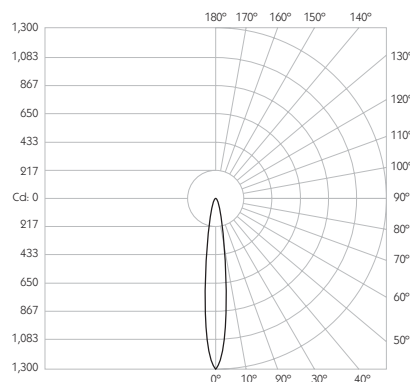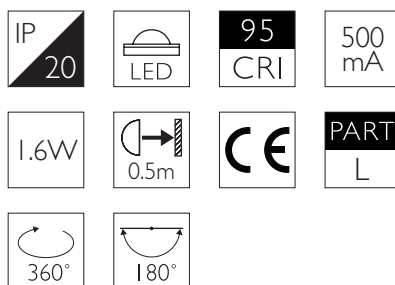

1.6W 12°	3000K LED
1m	0.21m
2m	0.42m
3m	0.63m
4m	0.84m
5m	1.05m
	1,920 lx
	305 lx
	136 lx
	76 lx
	49 lx



Fixed Mounting Plate

MPN-701-AL-309512

MPN-701-BK-309512

MPN-701-WH-309512





Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Integral Monopoint

Lockable Pan & Tilt

Accessories Snoots

System Power 1.6W

Module Output 140lm

Absolute Output 119lm

LOR 85%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 30°

Gear Type Dimmable options available



Weight 47g

* Please enquire as to the availability of non-standard CRI and Colour Temperatures.

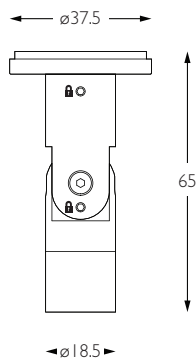


Pico 1 Surface is a discreet 95CRI LED spotlight, based on a minimal aesthetic and small footprint. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

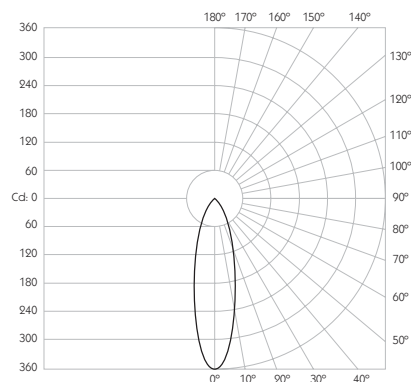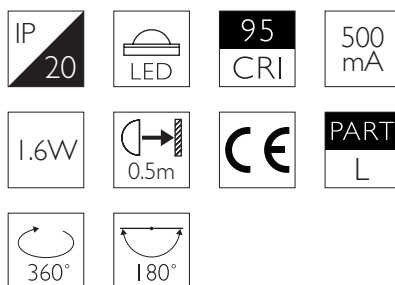

1.6W 30°	3000K LED
1m	0.54m
2m	1.07m
3m	1.61m
4m	2.14m
5m	2.68m
	360 lx
	90 lx
	40 lx
	23 lx
	14 lx



Fixed Mounting Plate

MPN-701-AL-309530

MPN-701-BK-309530

MPN-701-WH-309530



WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Integral Monopoint

Lockable Pan & Tilt

Accessories Snoots

System Power 1.6W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 60°

Gear Type Dimmable options available





Weight 47g

* Please enquire as to the availability of non-standard and Colour Temperatures.

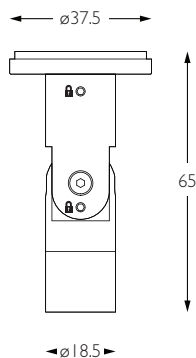

Pico 1 Surface is a discreet 95CRI LED spotlight, based on a minimal aesthetic and small footprint. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

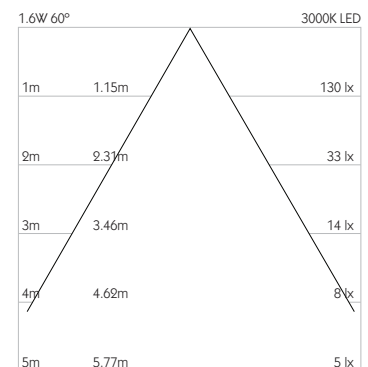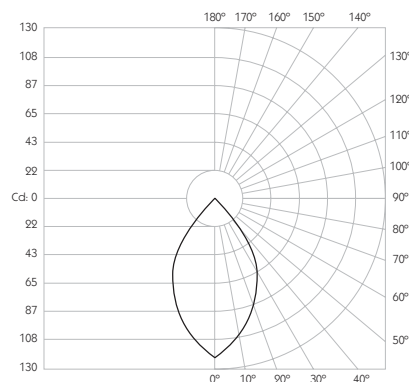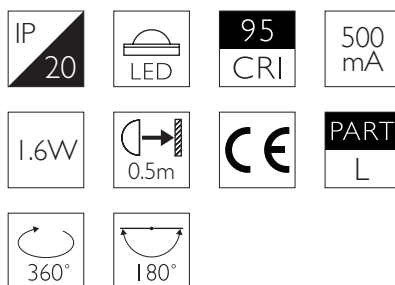

Fixed Mounting Plate

MPN-701-AL-309560

MPN-701-BK-309560

MPN-701-WH-309560

