



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Integral Monopoint

Lockable Pan & Tilt

System Power 1.6W

Module Output 140lm

Absolute Output 130lm

LOR 92%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 12°

Gear Type Dimmable options available

Weight 62g



Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.

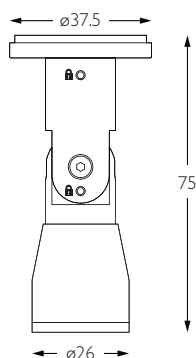


Pico Plus Surface is a discreet 95CRI LED spotlight, based on a minimal aesthetic and small footprint, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Plus Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

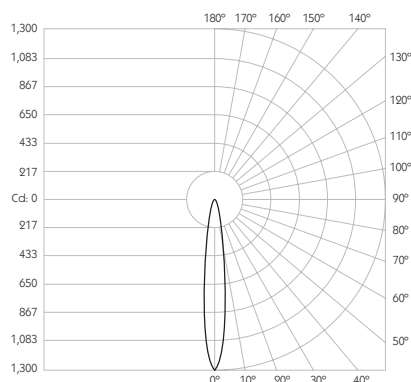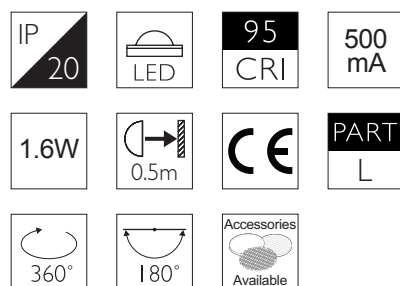

| 1.6W 12° | | 3000K LED |
|----------|-------|-----------|
| 1m | 0.21m | 1,920 lx |
| 2m | 0.42m | 305 lx |
| 3m | 0.63m | 136 lx |
| 4m | 0.84m | 76 lx |
| 5m | 1.05m | 49 lx |



Fixed Mounting Plate

MPN-708-AL-309512

MPN-708-BK-309512

MPN-708-WH-309512





Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Integral Monopoint

Lockable Pan & Tilt

System Power 1.6W

Module Output 140lm

Absolute Output 119lm

LOR 84%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 30°

Gear Type Dimmable options available

Weight 62g



Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.

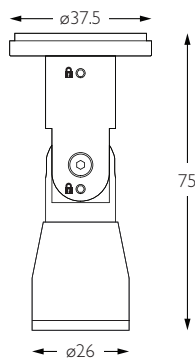


Pico Plus Surface is a discreet 95CRI LED spotlight, based on a minimal aesthetic and small footprint, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Plus Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

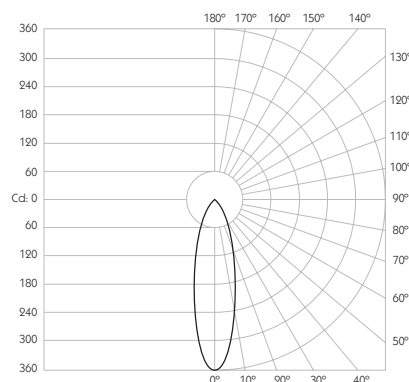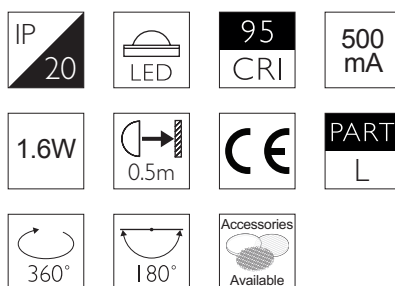

| 1.6W 30° | 3000K LED |
|----------|-----------|
| 1m | 0.54m |
| 2m | 1.07m |
| 3m | 1.61m |
| 4m | 2.14m |
| 5m | 2.68m |
| | 360 lx |
| | 90 lx |
| | 40 lx |
| | 23 lx |
| | 14 lx |



Fixed Mounting Plate

MPN-708-AL-309530

MPN-708-BK-309530

MPN-708-WH-309530





Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Integral Monopoint

Lockable Pan & Tilt

System Power 1.6W

Module Output 140lm

Absolute Output 130lm

LOR 92%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 60°

Gear Type Dimmable options available

Weight 62g





Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.

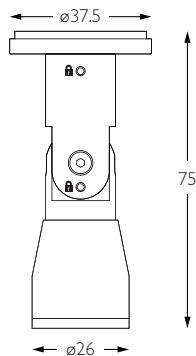

Pico Plus Surface is a discreet 95CRI LED spotlight, based on a minimal aesthetic and small footprint, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Plus Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

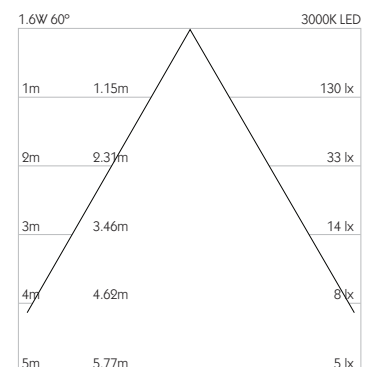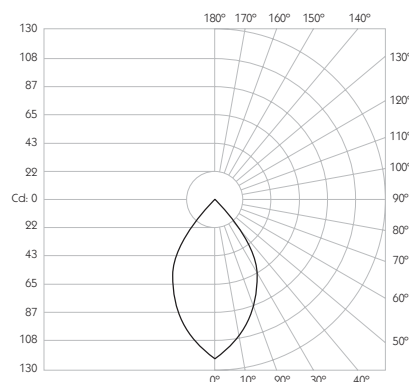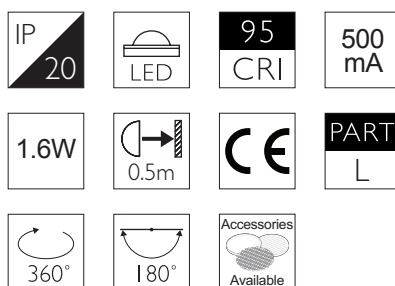

Fixed Mounting Plate

MPN-708-AL-309560

MPN-708-BK-309560

MPN-708-WH-309560

