



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

System Power 1.9W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 12°

Gear Type Dimmable options available

Weight 75g


Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.




Pico Plus is a discreet 95CRI LED, based on the minimal aesthetic of the Pico 1, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes and has three site changeable optics for flexible distribution. Movement is aided by a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico Plus is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

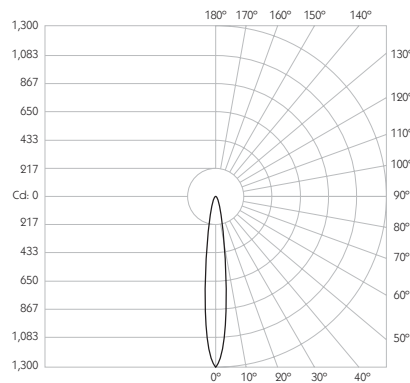

1.9W 12°	3000K LED
1m 0.21m	1,920 lx
2m 0.42m	305 lx
3m 0.63m	136 lx
4m 0.84m	76 lx
5m 1.05m	49 lx

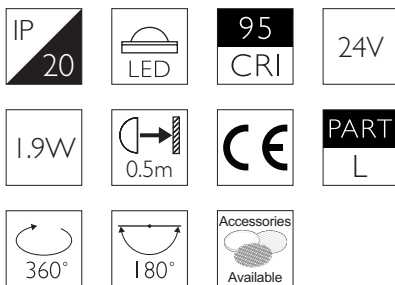

Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
CA-708-AL-309512	BT-708-AL-309512	RT-708-AL-309512	EUT3-708-AL-309512	MPS-708-AL-309512		MPX-708-AL-309512	MPY-708-AL-309512	MPZ-708-AL-309512
		RT-708-BK-309512	EUT3-708-BK-309512	MPS-708-BK-309512		MPX-708-BK-309512	MPY-708-BK-309512	MPZ-708-BK-309512
		RT-708-WH-309512	EUT3-708-WH-309512	MPS-708-WH-309512		MPX-708-WH-309512	MPY-708-WH-309512	MPZ-708-WH-309512



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

System Power 1.9W

Module Output 140lm

Absolute Output 119lm

LOR 85%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 30°

Gear Type Dimmable options available

Weight 75g


Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.




Pico Plus is a discreet 95CRI LED, based on the minimal aesthetic of the Pico 1, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes and has three site changeable optics for flexible distribution. Movement is aided by a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico Plus is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

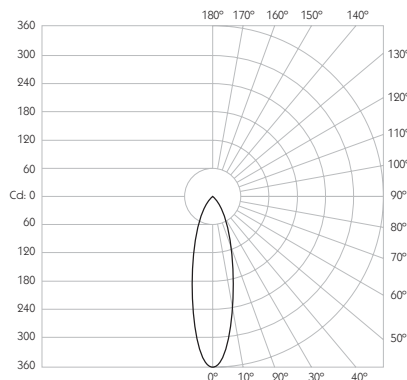

1.9W 30°	3000K LED
1m	0.54m
2m	1.07m
3m	1.61m
4m	2.14m
5m	2.68m
	360 lx
	90 lx
	40 lx
	23 lx
	14 lx

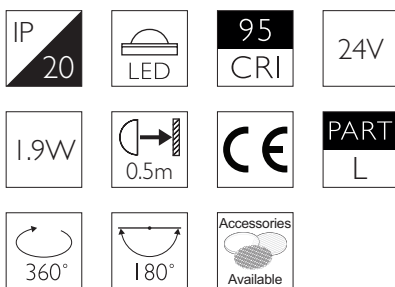

Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
CA-708-AL-309530	BT-708-AL-309530	RT-708-AL-309530	EUT3-708-AL-309530	MPS-708-AL-309530		MPX-708-AL-309530	MPY-708-AL-309530	MPZ-708-AL-309530
		RT-708-BK-309530	EUT3-708-BK-309530	MPS-708-BK-309530		MPX-708-BK-309530	MPY-708-BK-309530	MPZ-708-BK-309530
		RT-708-WH-309530	EUT3-708-WH-309530	MPS-708-WH-309530		MPX-708-WH-309530	MPY-708-WH-309530	MPZ-708-WH-309530



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

System Power 1.9W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 60°

Gear Type Dimmable options available

Weight 75g



Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.



Pico Plus is a discreet 95CRI LED, based on the minimal aesthetic of the Pico 1, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes and has three site changeable optics for flexible distribution. Movement is aided by a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico Plus is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

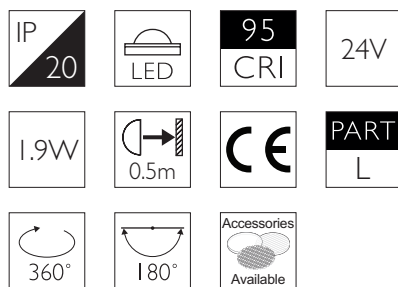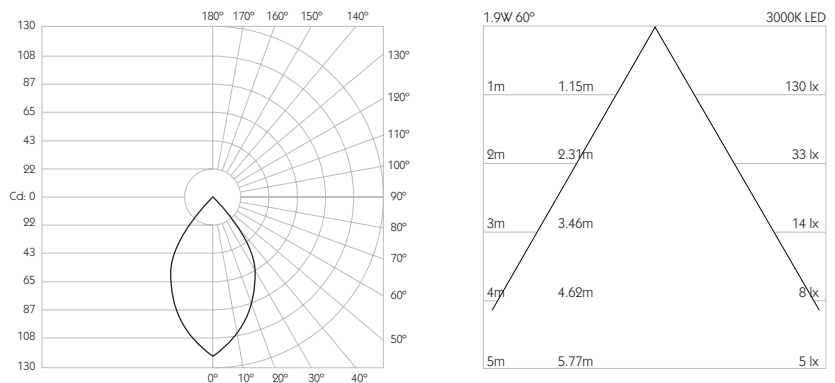

	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
CA-708-AL-309560		BT-708-AL-309560	RT-708-AL-309560	EUT3-708-AL-309560	MPS-708-AL-309560		MPX-708-AL-309560	MPY-708-AL-309560	MPZ-708-AL-309560
			RT-708-BK-309560	EUT3-708-BK-309560	MPS-708-BK-309560		MPX-708-BK-309560	MPY-708-BK-309560	MPZ-708-BK-309560
			RT-708-WH-309560	EUT3-708-WH-309560	MPS-708-WH-309560		MPX-708-WH-309560	MPY-708-WH-309560	MPZ-708-WH-309560