

DISCUS S11

luminaires
spec sheet 781

NARROW SPOT | GLARE GUARD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 3.6W

Module Output 305lm

Absolute Output 294lm

LOR 96%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 14°

Gear Type Dimmable options available

Weight 253g



Stem Length 600mm | Custom available upon request

* Please enquire as to the availability of non-standard Colour Temperatures.

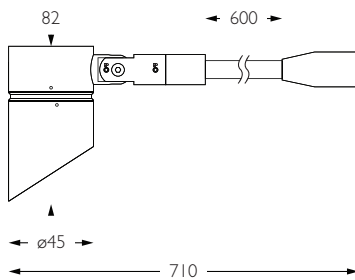

Discus S11 is a compact 95CRI LED spotlight, mounted to a 600mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus S11 is machined from Aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

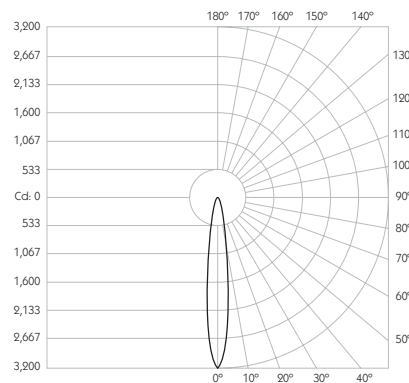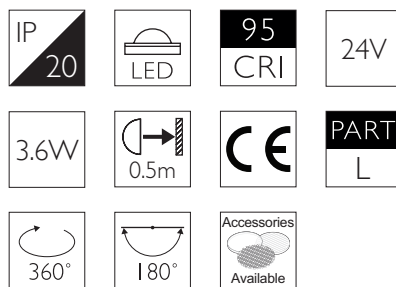

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.25m	3,131 lx
2m	0.49m	783 lx
3m	0.74m	348 lx
4m	0.98m	196 lx
5m	1.23m	125 lx

Accessories	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Available									
		BT-781-AL-309514	RT-781-AL-309514		MPS-781-AL-309514		MPX-781-AL-309514	MPY-781-AL-309514	MPZ-781-AL-309514
			RT-781-BK-309514		MPS-781-BK-309514		MPX-781-BK-309514	MPY-781-BK-309514	MPZ-781-BK-309514
			RT-781-WH-309514		MPS-781-WH-309514		MPX-781-WH-309514	MPY-781-WH-309514	MPZ-781-WH-309514

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Monopoint I LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 3.6W

Module Output 305lm

Absolute Output 277lm

LOR 91%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 20°

Gear Type Dimmable options available

Weight 253g




Stem Length 600mm | Custom available upon request

* Please enquire as to the availability of non-standard Colour Temperatures.

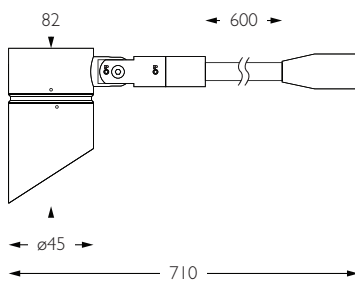

Discus S11 is a compact 95CRI LED spotlight, mounted to a 600mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus S11 is machined from Aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

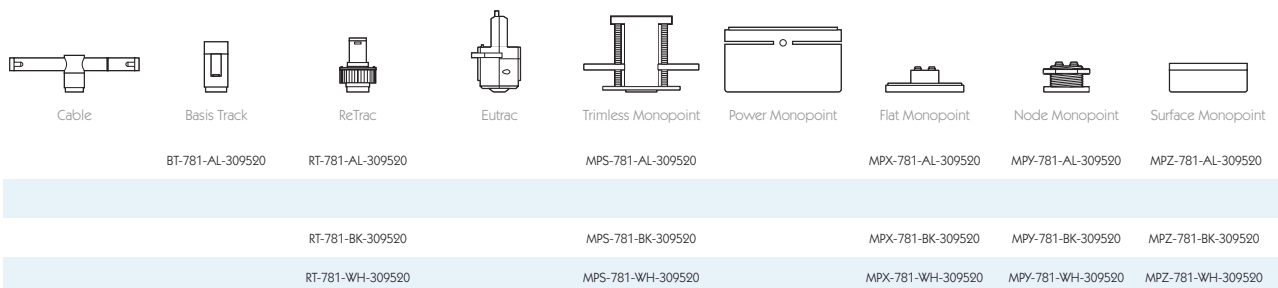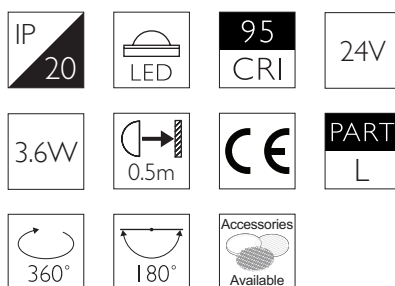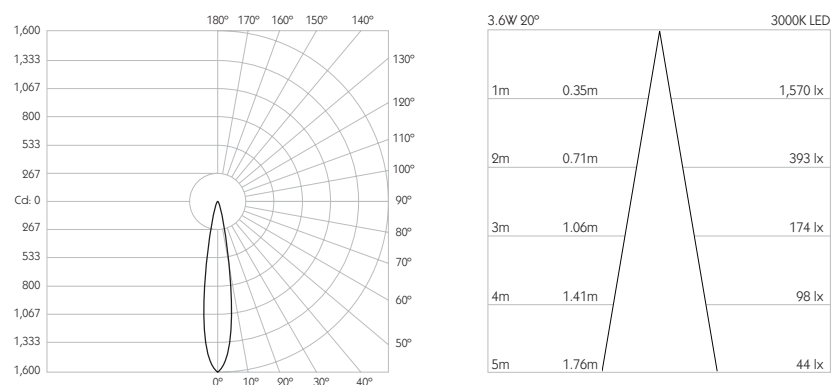



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Monopoint I LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 3.6W

Module Output 305lm

Absolute Output 266lm

LOR 87%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 30°

Gear Type Dimmable options available

Weight 253g

Stem Length 600mm | Custom available upon request

* Please enquire as to the availability of non-standard Colour Temperatures.

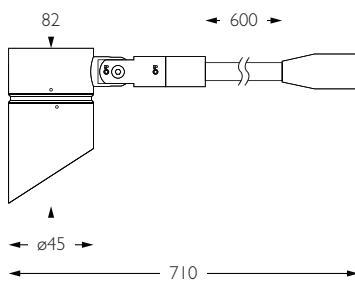

Discus S11 is a compact 95CRI LED spotlight, mounted to a 600mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus S11 is machined from Aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

