



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 3.6W

Module Output 305lm

Absolute Output 294lm

LOR 96%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 14°

Gear Type Dimmable options available

Weight 258g



Stem Length 600mm | Custom available upon request

* Please enquire as to the availability of non-standard Colour Temperatures.

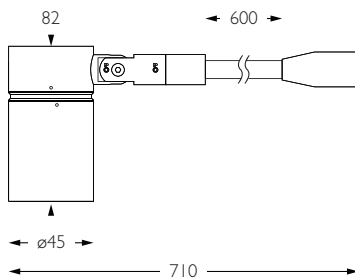

Discus S11 is a compact 95CRI LED spotlight, mounted to a 600mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus S11 is machined from Aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

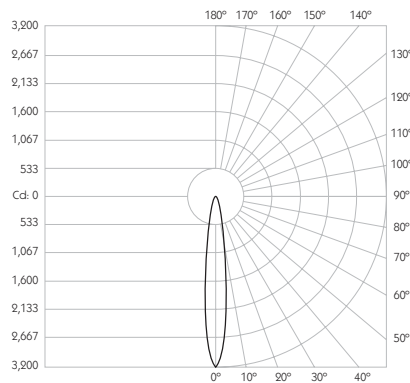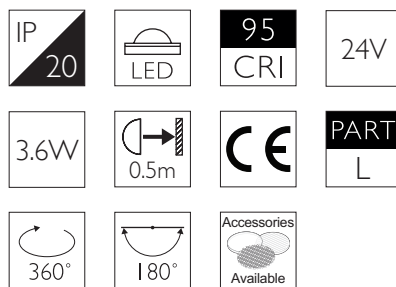

3.6W 14°	3000K LED
1m 0.25m	3,131 lx
2m 0.49m	783 lx
3m 0.74m	348 lx
4m 0.98m	196 lx
5m 1.23m	125 lx

	BT-782-AL-309514	RT-782-AL-309514		MPS-782-AL-309514		MPX-782-AL-309514	MPY-782-AL-309514	MPZ-782-AL-309514
		RT-782-BK-309514		MPS-782-BK-309514		MPX-782-BK-309514	MPY-782-BK-309514	MPZ-782-BK-309514
		RT-782-WH-309514		MPS-782-WH-309514		MPX-782-WH-309514	MPY-782-WH-309514	MPZ-782-WH-309514



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 3.6W

Module Output 305lm

Absolute Output 277lm

LOR 91%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 20°

Gear Type Dimmable options available

Weight 258g



Stem Length 600mm | Custom available upon request

* Please enquire as to the availability of non-standard Colour Temperatures.

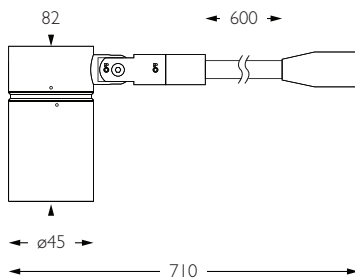

Discus S11 is a compact 95CRI LED spotlight, mounted to a 600mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus S11 is machined from Aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

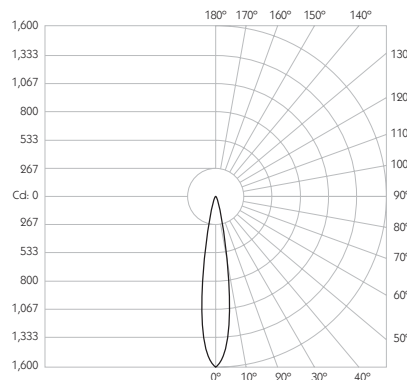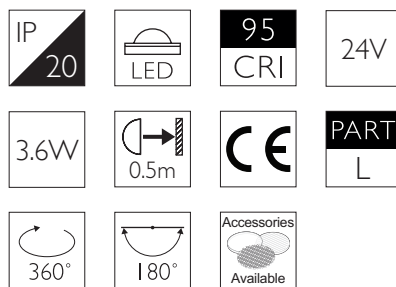

Distance	Beam Diameter	Footcandle (lx)
1m	0.35m	1,570 lx
2m	0.71m	393 lx
3m	1.06m	174 lx
4m	1.41m	98 lx
5m	1.76m	44 lx

Accessories	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Available	BT-782-AL-309520	RT-782-AL-309520	MPS-782-AL-309520	MPX-782-AL-309520	MPY-782-AL-309520	MPZ-782-AL-309520			



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Monopoint I LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 3.6W

Module Output 305lm

Absolute Output 266lm

LOR 87%

Colour Temperature 3000K*

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 30°

Gear Type Dimmable options available

Weight 258g

Stem Length 600mm | Custom available upon request

* Please enquire as to the availability of non-standard Colour Temperatures.

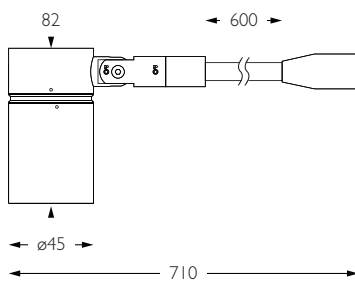

Discus S11 is a compact 95CRI LED spotlight, mounted to a 600mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus S11 is machined from Aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

