



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 7W

Module Output 560lm

Absolute Output 535lm

LOR 96%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12°

Gear Type Dimmable options available



Weight 388g

* Please enquire as to the availability of non-standard Colour Temperatures.

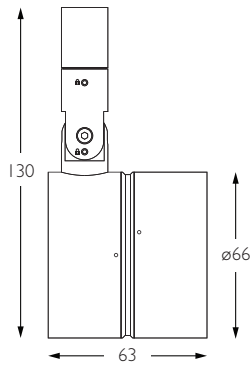

Discus 16 is a 95CRI LED spotlight, based on a minimalist design with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus 16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 560lm at 7W.

Product Photometry independently tested in accordance with LM-79

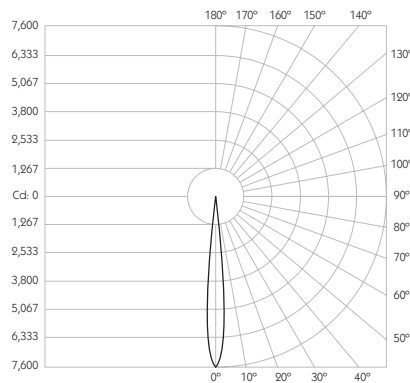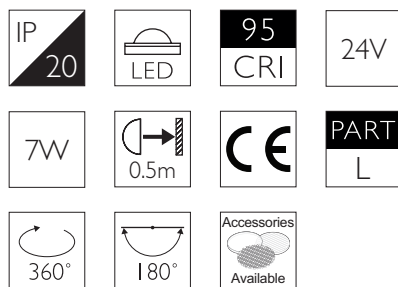

7.0W 12°	3000K LED
1m 0.21m	7,570 lx
2m 0.42m	1,892 lx
3m 0.63m	841 lx
4m 0.84m	473 lx
5m 1.05m	303 lx

Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
BT-753-AL-309512	RT-753-AL-309512	EUT3-753-AL-309512	MPS-753-AL-309512	MPX-753-AL-309512	MPY-753-AL-309512	MPZ-753-AL-309512		
		RT-753-BK-309512	EUT3-753-BK-309512	MPS-753-BK-309512	MPX-753-BK-309512	MPY-753-BK-309512	MPZ-753-BK-309512	
		RT-753-WH-309512	EUT3-753-WH-309512	MPS-753-WH-309512	MPX-753-WH-309512	MPY-753-WH-309512	MPZ-753-WH-309512	



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 7W

Module Output 560lm

Absolute Output 535lm

LOR 96%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 20°

Gear Type Dimmable options available



Weight 388g

* Please enquire as to the availability of non-standard Colour Temperatures.

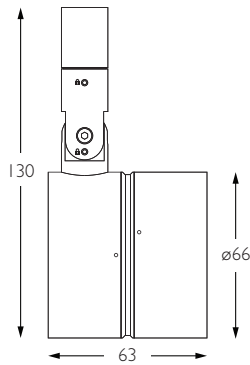

Discus 16 is a 95CRI LED spotlight, based on a minimalist design with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus 16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 560lm at 7W.

Product Photometry independently tested in accordance with LM-79

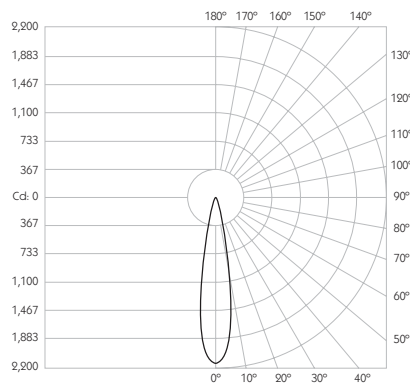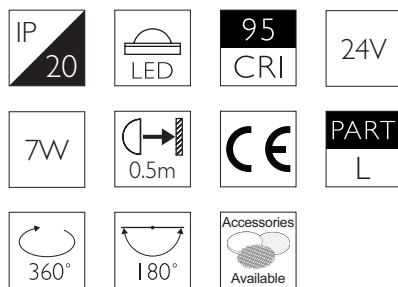

7.0W 20°	3000K LED
1m 0.35m	2,160 lx
2m 0.71m	540 lx
3m 1.06m	240 lx
4m 1.41m	135 lx
5m 1.76m	86 lx

Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
BT-753-AL-309520	RT-753-AL-309520	EUT3-753-AL-309520	MPS-753-AL-309520	MPX-753-AL-309520	MPY-753-AL-309520	MPZ-753-AL-309520		
	RT-753-BK-309520	EUT3-753-BK-309520	MPS-753-BK-309520	MPX-753-BK-309520	MPY-753-BK-309520	MPZ-753-BK-309520		
	RT-753-WH-309520	EUT3-753-WH-309520	MPS-753-WH-309520	MPX-753-WH-309520	MPY-753-WH-309520	MPZ-753-WH-309520		



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 7W

Module Output 560lm

Absolute Output 530lm

LOR 95%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 40°

Gear Type Dimmable options available


Weight 388g

* Please enquire as to the availability of non-standard Colour Temperatures.

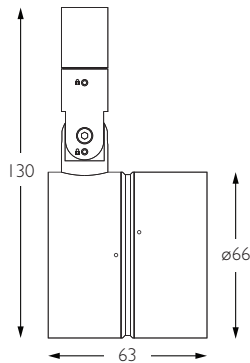


Discus 16 is a 95CRI LED spotlight, based on a minimalist design with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus 16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 560lm at 7W.

Product Photometry independently tested in accordance with LM-79

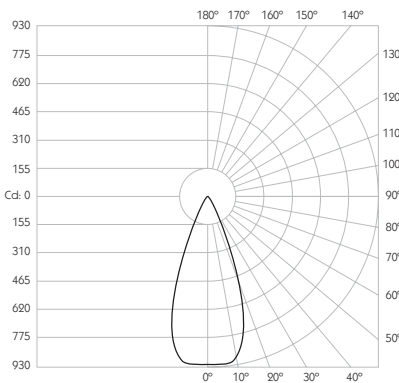

Distance (m)	Beam Diameter (m)	Footcandle (lx)
1m	0.73m	767 lx
2m	1.46m	194 lx
3m	2.18m	86 lx
4m	2.91m	48 lx
5m	3.64m	31 lx

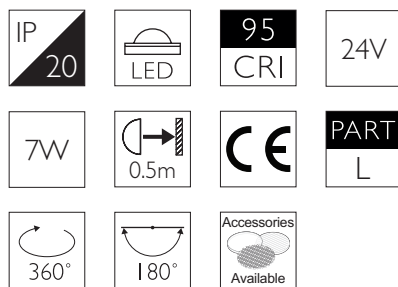

	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Grey		BT-753-AL-309540	RT-753-AL-309540	EUT3-753-AL-309540	MPS-753-AL-309540		MPX-753-AL-309540	MPY-753-AL-309540	MPZ-753-AL-309540
Black			RT-753-BK-309540	EUT3-753-BK-309540	MPS-753-BK-309540		MPX-753-BK-309540	MPY-753-BK-309540	MPZ-753-BK-309540
White			RT-753-WH-309540	EUT3-753-WH-309540	MPS-753-WH-309540		MPX-753-WH-309540	MPY-753-WH-309540	MPZ-753-WH-309540