


Mole



* OR EITHER 58.5MM OR 73.5MM FOR DEEP SET VERSIONS DEPENDING ON HOW MUCH GLARE PROTECTION IS REQUIRED.

Order Code	Mole.col temp.optic.finish
Example	Mole.3000K.8.2°.alu

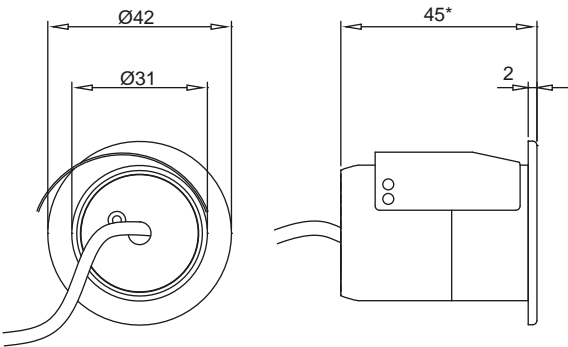

Materials:	Aluminium, toughened glass
Lamp:	MSL Star (1 x Cree XPE)
IP Rating:	IP66
Finish:	Anodised aluminium or painted to any RAL colour
Dimming:	1-10, DMX, DALI or Mains Dim
Cut out:	Ø33mm
Driver:	Remote driver required Allow 3w at 700mA or 1w at 350mA
Locking:	Fixed
Available Tilt:	Fixed
Weight:	0.2kg
Description:	Rebuildable LED ground or wall recessed fitting. Can also be supplied with an optional "shark fin" for use as a recessed downlighter. Optional installation sleeve for ground recessing Suitable for use in areas subject to foot traffic only
Accessories:	8.2°, 10.35°, 17.9° or 31.5° optics
Deviation:	Deepset version; one adds 15mm to the recess depth and the other, 30mm. Please note that the 30mm deepset version is not suitable for use with 31.5° optic

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

Each LED "lamp" consists of one or more CREE XPE power LED thermally bonded to an aluminium cored printed circuit board. White colour temperatures of 2800K, 3000K, 3500K, 5000K and 6500K can be specified as can amber, red, green or blue.



MSL Star
Ø21mm PCB with a single Cree XPE LED. For Ø20mm optics (XPE range).

For driver information see LED driver spec sheet.