
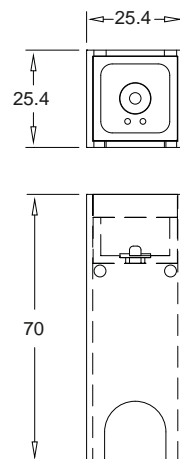


Square Mole

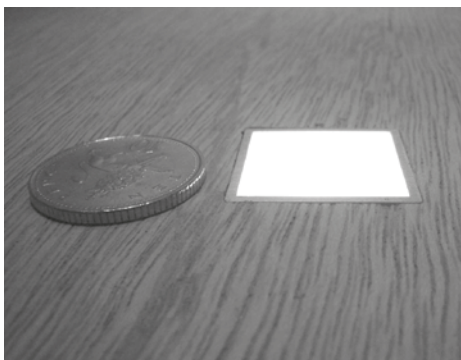

Order Code	Square.Mole.Col Temp.Finish
Example	Square.Mole.3000K.anodised


Materials:	Aluminium, 6mm toughened glass
Lamp:	Type S (1 x Cree XPE)
IP Rating:	IP65
Finish:	Anodised aluminium
Dimming:	1-10v, DMX, DALI or Mains
Driver:	Remote driver required Allow 1w at 350mA (max)
Locking:	Fixed
Available Tilt:	Fixed
Weight:	0.1kg
Description:	Recessed exterior IP66 LED fitting with 6mm toughened glass to be ground or wall recessed

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

The Type S PCB uses 1 x Cree XPE power LED thermally bonded to an FR4 gold coated PCB, heat sunk by means of gold vias. Colour temperatures of 2800K, 3000K, 3500K and 6500K can be specified as can amber, red, green or blue.

Type S



For driver information see LED driver spec sheet.