



# Interior LED Channel

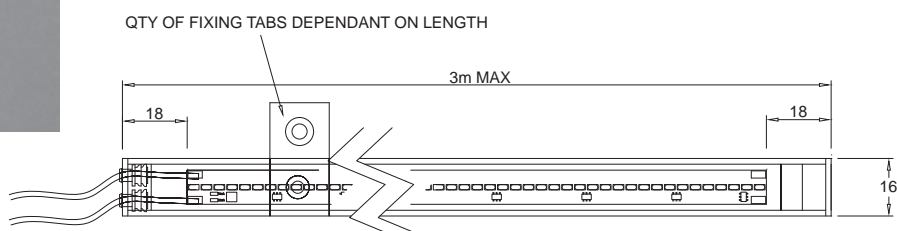

Order Code	LED Channel.int.length.output.col temp
Example	LED channel.int.400.standard.3500K

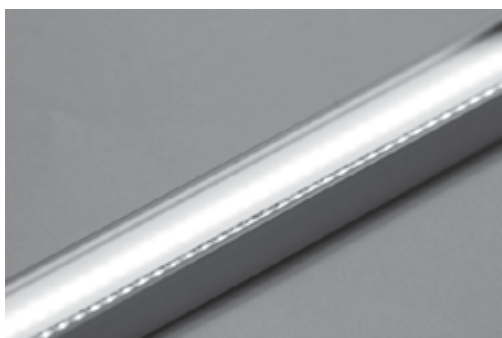


- Materials:** Aluminium
- Lamp:** MSL G2 Standard Output or MSL G2 High Output LED Strip
- Colour temp:** 3000K, 4000K
- Finish:** Anodised aluminium (or painted to any RAL colour by special request)
- Dimming:** 1-10V if supplied with OTDIM dimming module
- Supply:** 24V DC from a dedicated driver (12V DC for red, yellow green and amber)
- Fixing:** Via the fixing tabs at either end or anywhere along the length (1 supplied every 0.5m as standard) or via M3 linear thread anywhere along the back of the extrusion.
- Description:** Micro LED strip housed in 16.5mm x 12mm channel. Interior use only. Channel length up to 3m, strip comes in 25mm increments.
- Deviations:** Fixing methods  
Longer lengths possible, anything over 3m will be supplied in more than 1 section.

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature.

2700K, 3500K, 5000K, 6000K colour temperatures are also available by special request and perhaps with longer lead time.

Alternative adjustable hinge mounts;

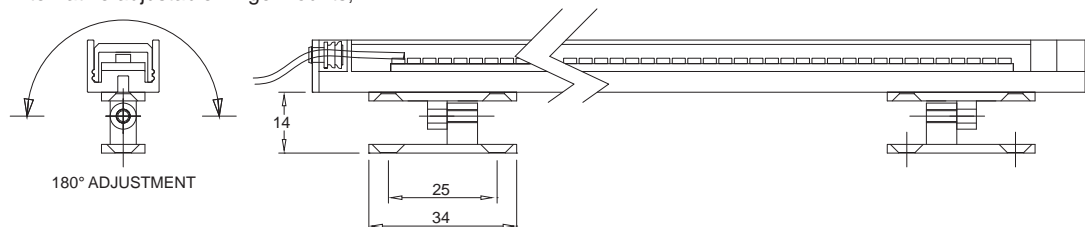

## LED Strip

### G2 Standard Output

LEDs at 3.57mm centres / 140 LEDs per 500mm strip  
Consumption: 10W per meter  
Output: 1078 lumens per meter



### G2 High Output

LEDs at 3.57mm centres / 140 LEDs per 500mm strip  
Consumption: 20W per meter  
Output: 1960 lumens per meter

