NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm
Absolute Output 658lm

LOR 93%

Colour Temperature 3000K*


CRI 95

Optics 12°

Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.





























Product Photometry independently tested in accordance with LM-79







RT-654-AL-300519



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA

FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 600lm

LOR 84%

Colour Temperature 3000K*


CRI 95

Optics 30°


Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.



































Basis Track

BT-654-AL-309530



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 0BA WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 655lm

LOR 92%

Colour Temperature 3000K*


CRI 95


Optics 60°


Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.



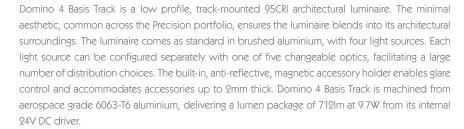



Product Photometry independently tested in accordance with LM-79



























BT-654-AL-309560



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 0BA t. +44 (0) 20 8947 6616 f. +44 (0) 20 8286 6626 **ELLIPSE**



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 652lm

LOR 92%

Colour Temperature 3000K*


CRI 95


Optics 12X35°

Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.

























Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79







Basis Track

BT-654-AL-3095E1



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA

WWW.PRECISIONLIGHTING.CO.UK



Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 652lm

LOR 92%

Colour Temperature 3000K*


CRI 95


Optics 35X12°

Gear Type Dimmable options available

Weight 432g

^{*} Please enquire as to the availability of non-standard colour temperatures.



























Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79







RT-654-AL-3095E9



SALES@PRECISIONLIGHTING.CO.UK WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA



Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 626lm

LOR 88%

Colour Temperature 3000K*


CRI 95


Optics 15X30°

Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.



























Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79







RT-654-AL-3095E3



SALES@PRECISIONLIGHTING.CO.UK WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA



Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 626lm

LOR 88%

Colour Temperature 3000K*


CRI 95


Optics 30X15°

Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.



























Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79







RT-654-AL-3095F4



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA t. +44 (0) 20 8947 6616 f. +44 (0) 20 8286 6626 FOCAL SPOT



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 630lm

LOR 92%

Colour Temperature 3000K*


CRI 95


Optics 12° | 30°

Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.

























Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79







BT-654-AL-3095C1



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA

FOCAL FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 657lm

LOR 92%

Colour Temperature 3000K*


CRI 95

Optics 12° | 60°


Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.







Product Photometry independently tested in accordance with LM-79



























Basis Track

BT-654-AL-3095C2



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA



Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 9.7W

Module Output 712lm

Absolute Output 628lm

LOR 92%

Colour Temperature 3000K*


CRI 95

Optics 30° | 60°


Gear Type Dimmable options available

Weight 432g

* Please enquire as to the availability of non-standard colour temperatures.





































RT-654-AL-3095C3



PRECISION LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA

WWW.PRECISIONLIGHTING.CO.UK