

DOMINO 1 SURFACE

luminaires
spec sheet TZ-651

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 164lm

LOR 93%

Colour Temperature 3000K*



CRI 95

Optics 12°

Gear Type Dimmable options available


Weight 64g

* Please enquire as to the availability of non-standard colour temperatures.

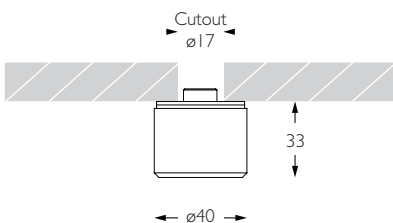


Domino 1 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

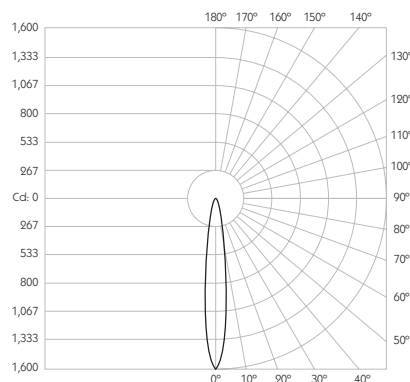

2.2W 12°	3000K LED
1m	0.21m
2m	0.42m
3m	0.63m
4m	0.84m
5m	1.05m
	1,566 lx
	392 lx
	174 lx
	98 lx
	63 lx

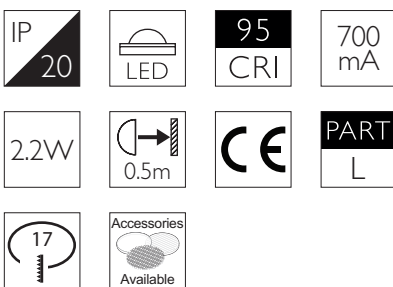

Surface

TZ-651-AL-309512

TZ-651-BK-309512

TZ-651-WH-309512



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 150lm

LOR 84%

Colour Temperature 3000K*



CRI 95

Optics 30°

Gear Type Dimmable options available


Weight 64g

* Please enquire as to the availability of non-standard colour temperatures.

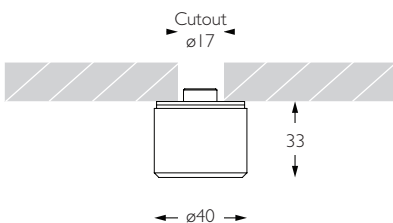


Domino 1 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

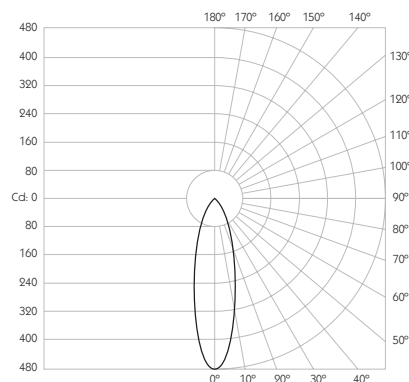

2.2W 30°		3000K LED	
1m	0.54m	470 lx	
2m	1.07m	118 lx	
3m	1.61m	52 lx	
4m	2.14m	29 lx	
5m	2.68m	19 lx	

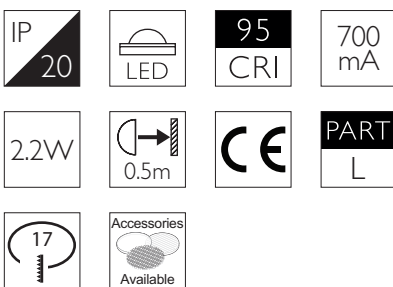

Surface

TZ-651-AL-309530

TZ-651-BK-309530

TZ-651-WH-309530



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*




CRI 95

Optics 60°

Gear Type Dimmable options available



Weight 64g

* Please enquire as to the availability of non-standard colour temperatures.

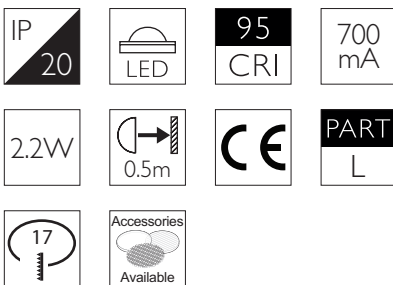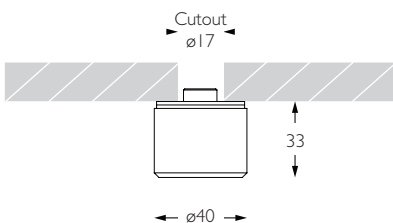

Domino 1 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

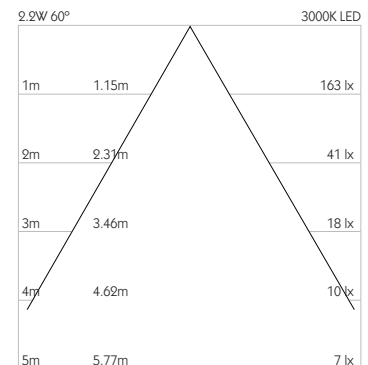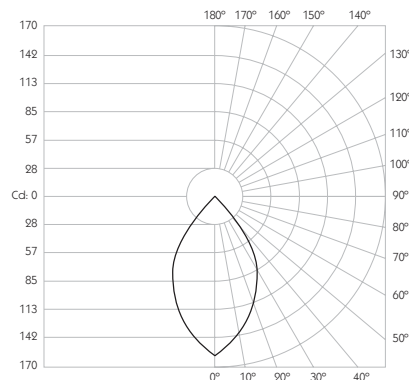

Surface

TZ-651-AL-309560

TZ-651-BK-309560

TZ-651-WH-309560



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*




CRI 95

Optics 12X35°


Gear Type Dimmable options available

Weight 64g

* Please enquire as to the availability of non-standard colour temperatures.

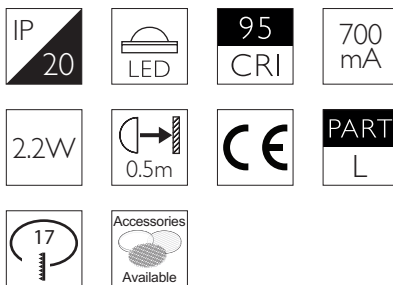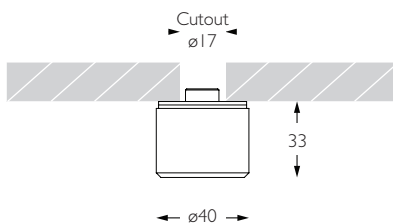

Domino 1 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

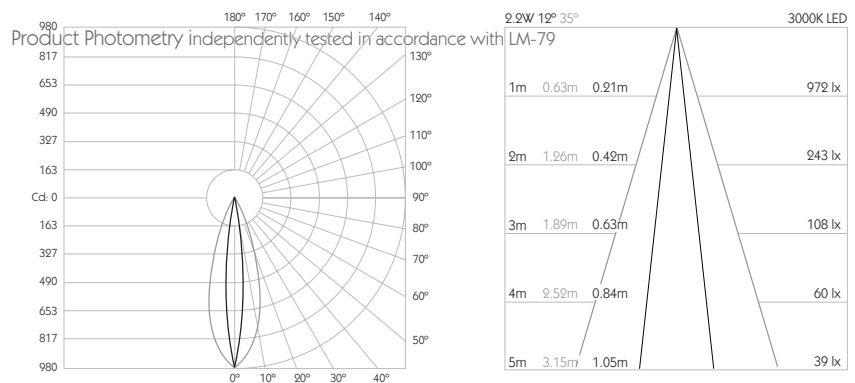

Surface

TZ-651-AL-3095E1

TZ-651-BK-3095E1

TZ-651-WH-3095E1



DOMINO 1 SURFACE

luminaires
spec sheet TZ-651

VERTICAL ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*



CRI 95

Optics 35X12°


Gear Type Dimmable options available

Weight 64g

* Please enquire as to the availability of non-standard colour temperatures.

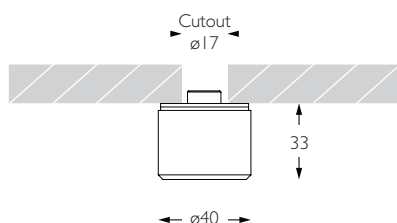


Beam
Orientation

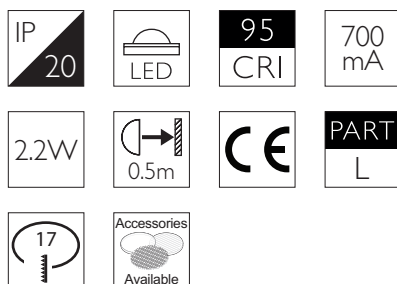

Domino 1 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

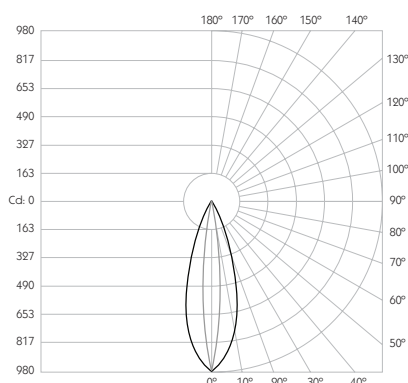

2.2W 35° 12°	3000K LED
1m 0.63m 0.21m	972 lx
2m 1.26m 0.42m	243 lx
3m 1.89m 0.63m	108 lx
4m 2.52m 0.84m	60 lx
5m 3.15m 1.05m	39 lx



Surface

TZ-651-AL-3095E2

TZ-651-BK-3095E2

TZ-651-WH-3095E2



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15