

# DOMINO 2 SURFACE

luminaires  
spec sheet TZ-652

NARROW SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout** ø17mm

**Min. Ceiling Thickness** 5mm

**Accessories** Lenses

**System Power** 4.4W

**Module Output** 356lm

**Absolute Output** 329lm

**LOR** 93%

**Colour Temperature** 3000K\*




**CRI** 95

**Optics** 12°

**Gear Type** Dimmable options available


**Weight** 101g

\* Please enquire as to the availability of non-standard colour temperatures.

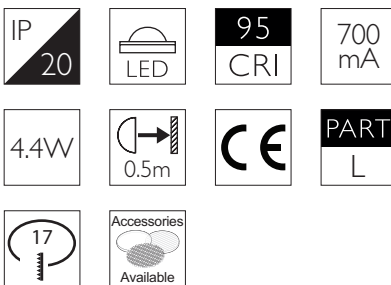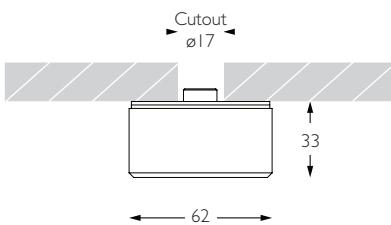


Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

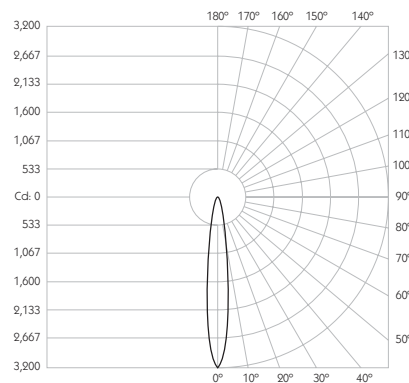

| Distance (m) | Beam Diameter (m) | Illuminance (lx) |
|--------------|-------------------|------------------|
| 1m           | 0.21m             | 3,140 lx         |
| 2m           | 0.42m             | 785 lx           |
| 3m           | 0.63m             | 350 lx           |
| 4m           | 0.84m             | 196 lx           |
| 5m           | 1.05m             | 125 lx           |



Surface

TZ-652-AL-309512

TZ-652-BK-309512

TZ-652-WH-309512



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 10.15

## FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout** ø17mm

**Min. Ceiling Thickness** 5mm

**Accessories** Lenses

**System Power** 4.4W

**Module Output** 356lm

**Absolute Output** 301lm

**LOR** 84%

**Colour Temperature** 3000K\*




**CRI** 95

**Optics** 30°

**Gear Type** Dimmable options available


**Weight** 101g

\* Please enquire as to the availability of non-standard colour temperatures.

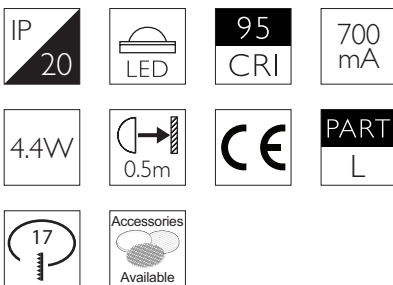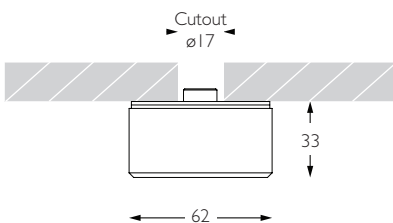


Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

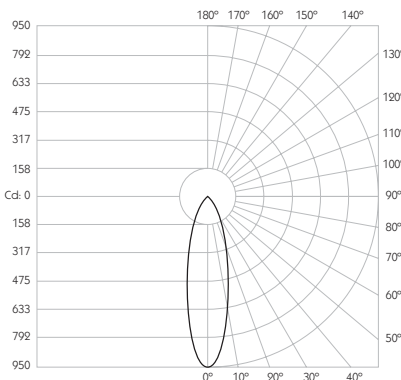

| 4.4W 30° | 3000K LED |
|----------|-----------|
| 1m       | 0.54m     |
| 2m       | 1.07m     |
| 3m       | 1.61m     |
| 4m       | 2.14m     |
| 5m       | 2.68m     |
|          | 940 lx    |
|          | 235 lx    |
|          | 105 lx    |
|          | 59 lx     |
|          | 37 lx     |



Surface

TZ-652-AL-309530

TZ-652-BK-309530

TZ-652-WH-309530



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

## WIDE FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout** ø17mm

**Min. Ceiling Thickness** 5mm

**Accessories** Lenses

**System Power** 4.4W

**Module Output** 356lm

**Absolute Output** 327lm

**LOR** 92%

**Colour Temperature** 3000K\*




**CRI** 95

**Optics** 60°

**Gear Type** Dimmable options available




**Weight** 101g

\* Please enquire as to the availability of non-standard colour temperatures.

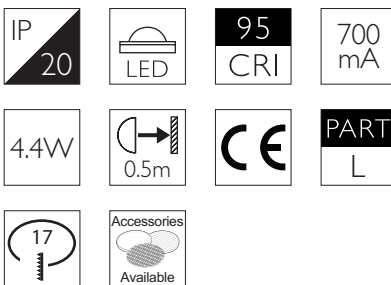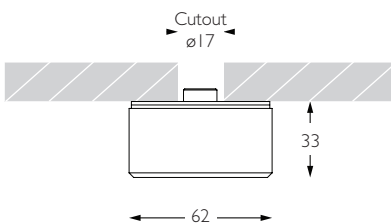

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

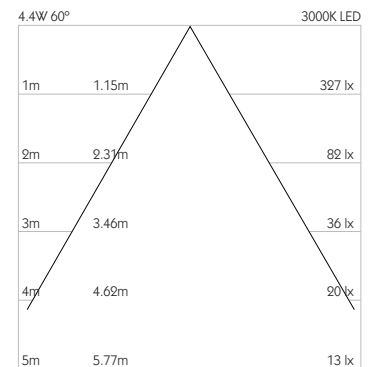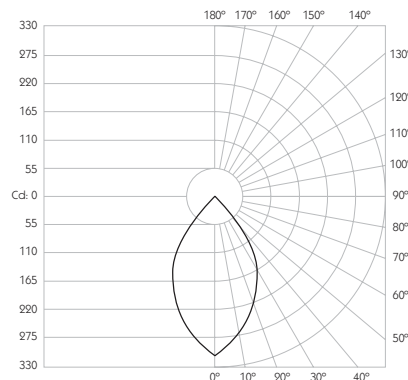

Surface

TZ-652-AL-309560

TZ-652-BK-309560

TZ-652-WH-309560



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout** ø17mm

**Min. Ceiling Thickness** 5mm

**Accessories** Lenses

**System Power** 4.4W

**Module Output** 356lm

**Absolute Output** 327lm

**LOR** 92%

**Colour Temperature** 3000K\*




**CRI** 95

**Optics** 12X35°

**Gear Type** Dimmable options available


**Weight** 101g

\* Please enquire as to the availability of non-standard colour temperatures.

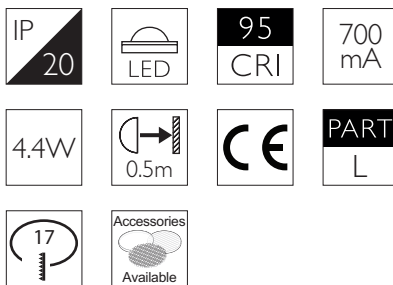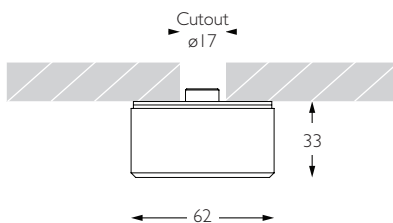


Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

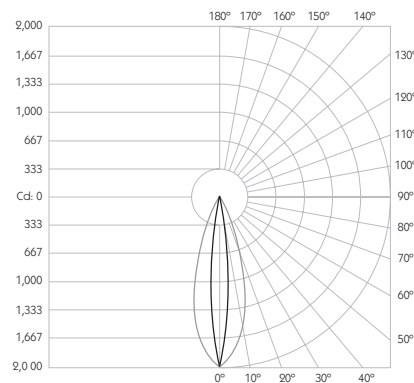

| Distance (m) | Beam Diameter (m) | Beam Area (m²) | Illuminance (lx) |
|--------------|-------------------|----------------|------------------|
| 1m           | 0.63m             | 0.21m²         | 1,950 lx         |
| 2m           | 1.26m             | 0.42m²         | 487 lx           |
| 3m           | 1.89m             | 0.63m²         | 216 lx           |
| 4m           | 2.52m             | 0.84m²         | 121 lx           |
| 5m           | 3.15m             | 1.05m²         | 78 lx            |



Surface

TZ-652-AL-3095E1

TZ-652-BK-3095E1

TZ-652-WH-3095E1



# DOMINO 2 SURFACE

luminaires  
spec sheet TZ-652

VERTICAL ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout** ø17mm

**Min. Ceiling Thickness** 5mm

**Accessories** Lenses

**System Power** 4.4W

**Module Output** 356lm

**Absolute Output** 327lm

**LOR** 92%

**Colour Temperature** 3000K\*




**CRI** 95

**Optics** 35X12°

**Gear Type** Dimmable options available


**Weight** 101g

\* Please enquire as to the availability of non-standard colour temperatures.

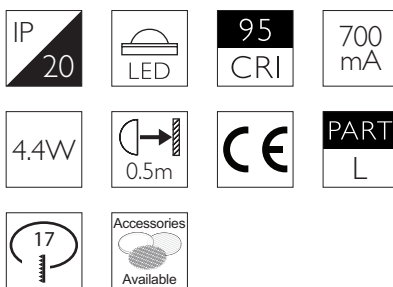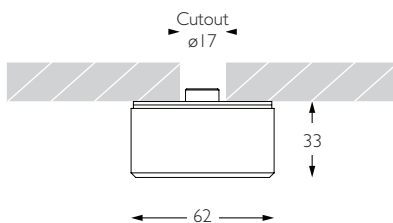


Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

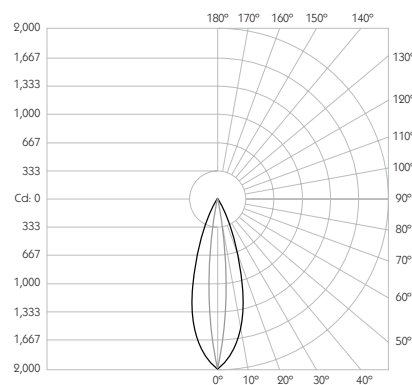

| 4.4W 35° 12° |       |       | 3000K LED |
|--------------|-------|-------|-----------|
| 1m           | 0.63m | 0.21m | 1,950 lx  |
| 2m           | 1.26m | 0.42m | 487 lx    |
| 3m           | 1.89m | 0.63m | 216 lx    |
| 4m           | 2.52m | 0.84m | 121 lx    |
| 5m           | 3.15m | 1.05m | 78 lx     |



Surface

TZ-652-AL-3095E2

TZ-652-BK-3095E2

TZ-652-WH-3095E2



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 10.15