

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 658lm

LOR 93%

Colour Temperature 3000K*




CRI 95

Optics 12°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

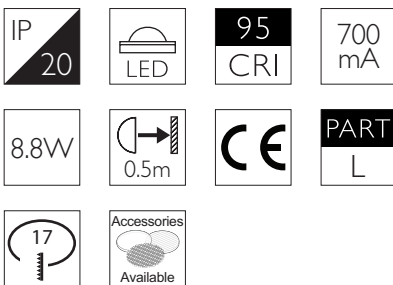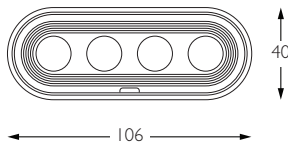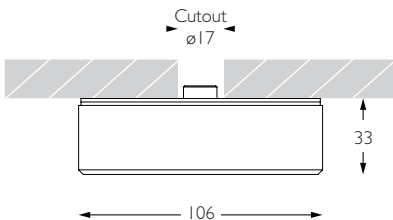

Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

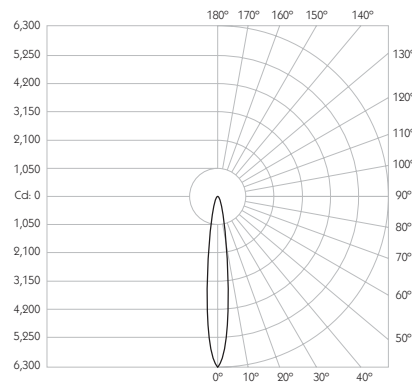

8.8W 12°	3000K LED
1m	0.21m
2m	0.42m
3m	0.63m
4m	0.84m
5m	1.05m
	6,285 lx
	1,570 lx
	700 lx
	390 lx
	250 lx



Surface

TZ-654-AL-309512

TZ-654-BK-309512

TZ-654-WH-309512



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 600lm

LOR 84%

Colour Temperature 3000K*




CRI 95

Optics 30°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

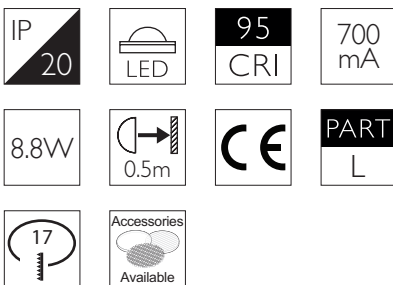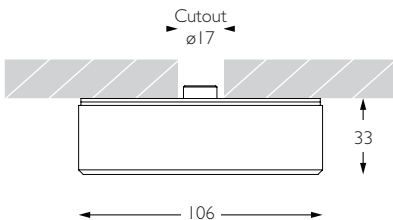

Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

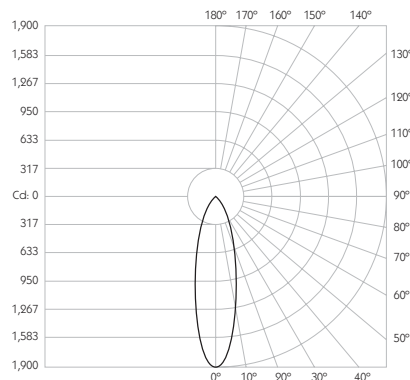

8.8W 30°		3000K LED	
1m	0.54m	1,880 lx	
2m	1.07m	470 lx	
3m	1.61m	210 lx	
4m	2.14m	117 lx	
5m	2.68m	75 lx	



Surface

TZ-654-AL-309530

TZ-654-BK-309530

TZ-654-WH-309530



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 655lm

LOR 92%

Colour Temperature 3000K*



CRI 95

Optics 60°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

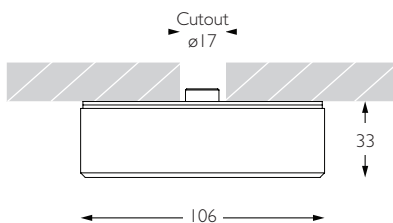


Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

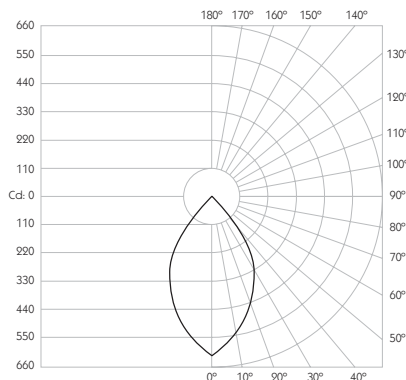

8.8W 60°	3000K LED
1m	1.15m
2m	2.37m
3m	3.46m
4m	4.62m
5m	5.77m
	655 lx
	164 lx
	73 lx
	41 lx
	26 lx

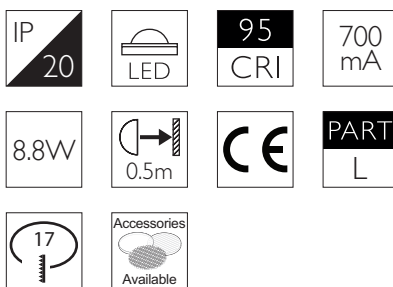

Surface

TZ-654-AL-309560

TZ-654-BK-309560

TZ-654-WH-309560



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 652lm

LOR 92%

Colour Temperature 3000K*


CRI 95

Optics 12X35°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

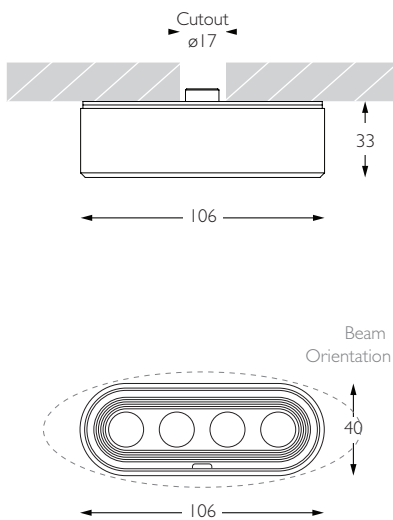


Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

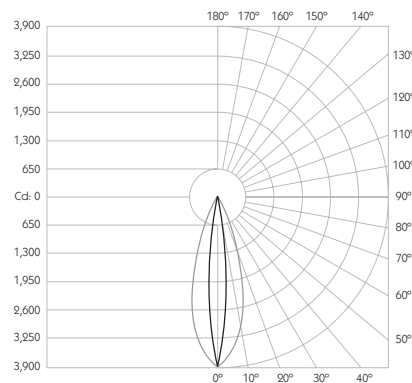

8.8W 12° 35°	3000K LED
1m 0.63m 0.21m	3,894 lx
2m 1.26m 0.42m	973 lx
3m 1.89m 0.63m	432 lx
4m 2.52m 0.84m	243 lx
5m 3.15m 1.05m	155 lx

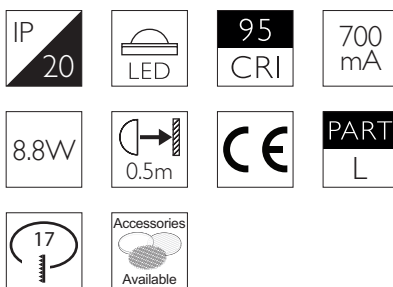

Surface

TZ-654-AL-3095E1

TZ-654-BK-3095XE1

TZ-654-WH-3095E1



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

VERTICAL ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 652lm

LOR 92%

Colour Temperature 3000K*


CRI 95

Optics 35X12°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

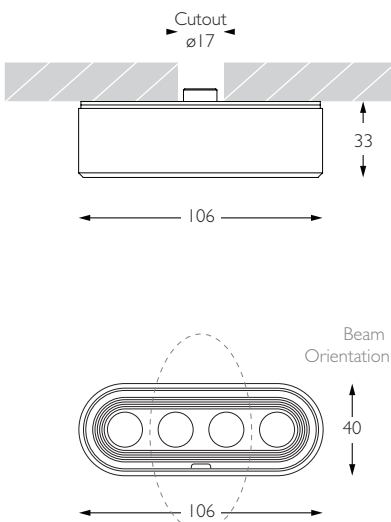


Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

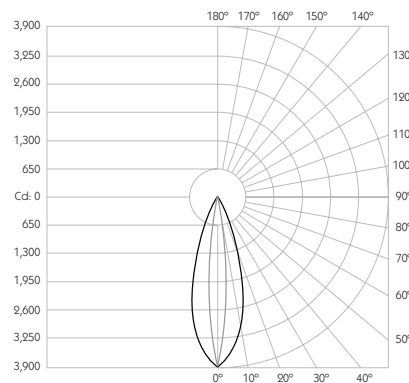

8.8W 35° 12°			3000K LED
1m	0.63m	0.21m	3,894 lx
2m	1.26m	0.42m	973 lx
3m	1.89m	0.63m	432 lx
4m	2.52m	0.84m	243 lx
5m	3.15m	1.05m	155 lx

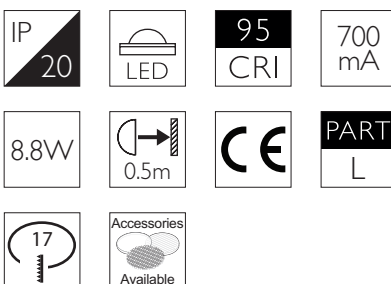

Surface

TZ-654-AL-3095E2

TZ-654-BK-3095E2

TZ-654-WH-3095E2

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

SOFT ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 626lm

LOR 88%

Colour Temperature 3000K*




CRI 95

Optics 15X30°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

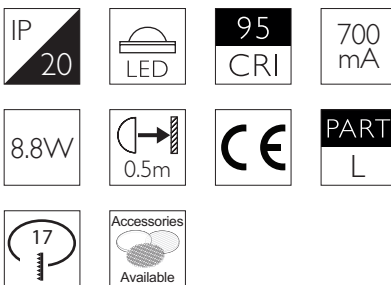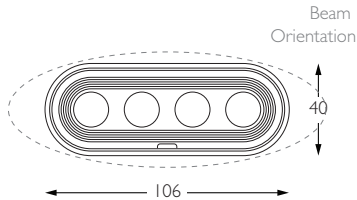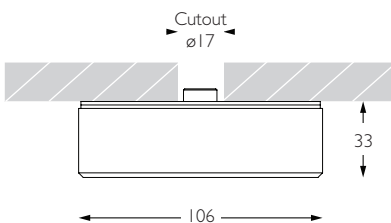

Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

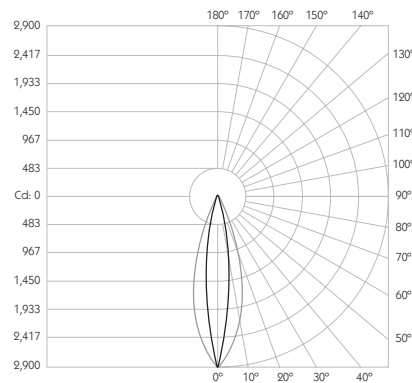

Distance (m)	Beam Diameter (m)	Beam Area (m²)	Illuminance (lx)
1m	0.54m	0.26m²	2,887 lx
2m	1.07m	0.53m²	721 lx
3m	1.61m	0.79m²	320 lx
4m	2.14m	1.05m²	180 lx
5m	2.68m	1.32m²	115 lx



Surface

TZ-654-AL-3095E3

TZ-654-BK-3095E3

TZ-654-WH-3095E3



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

VERTICAL SOFT ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 626lm

LOR 88%

Colour Temperature 3000K*



CRI 95

Optics 30X15°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

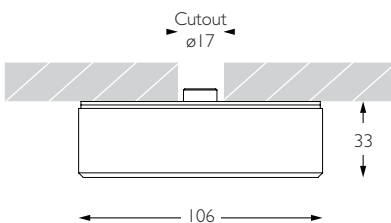


Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

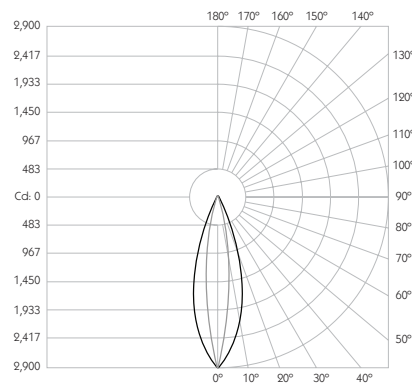

8.8W 30° 15°	3000K LED
1m 0.54m 0.26m	2,887 lx
2m 1.07m 0.53m	721 lx
3m 1.61m 0.79m	320 lx
4m 2.14m 1.05m	180 lx
5m 2.68m 1.32m	115 lx

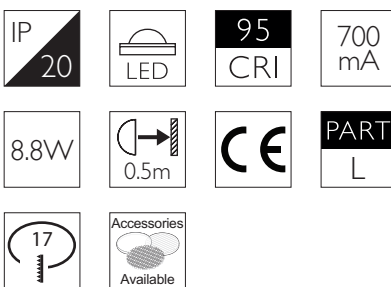

Surface

TZ-654-AL-3095E4

TZ-654-BK-3095E4

TZ-654-WH-3095E4

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

FOCAL SPOT



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 630lm

LOR 88%

Colour Temperature 3000K*


CRI 95

Optics 12° | 30

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

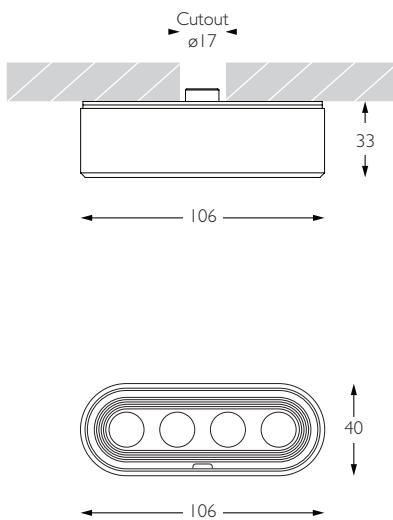


Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

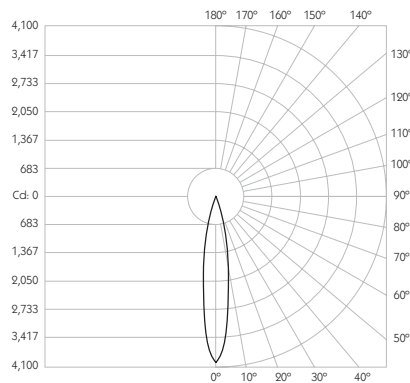

8.8W C1		3000K LED	
1m	0.30m		4,084 lx
2m	0.60m		1,021 lx
3m	0.90m		453 lx
4m	1.20m		255 lx
5m	1.40m		163 lx

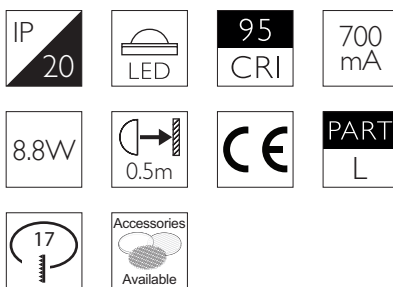

Surface

TZ-654-AL-3095C1

TZ-654-BK-3095XC1

TZ-654-WH-3095XC1



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

FOCAL FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 657lm

LOR 92%

Colour Temperature 3000K*




CRI 95

Optics 12° | 60°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

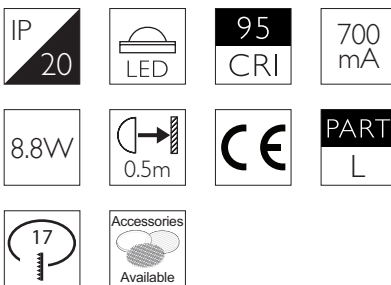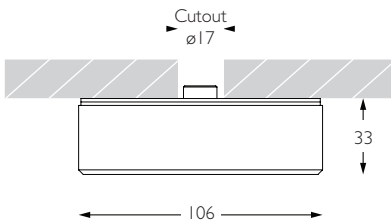

Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

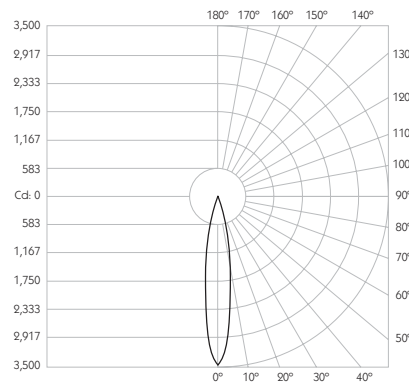

8.8W C2		3000K LED	
1m	0.30m		3,470 lx
2m	0.50m		867 lx
3m	0.80m		385 lx
4m	1.10m		216 lx
5m	1.40m		138 lx



Surface

TZ-654-AL-3095C2

TZ-654-BK-3095C2

TZ-654-WH-3095XC2



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15

DOMINO 4 SURFACE

luminaires
spec sheet TZ-654

SOFT FOCAL FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø17mm

Min. Ceiling Thickness 5mm

Accessories Lenses

System Power 8.8W

Module Output 712lm

Absolute Output 628lm

LOR 88%

Colour Temperature 3000K*



CRI 95

Optics 30° | 60°

Gear Type Dimmable options available


Weight 183g

* Please enquire as to the availability of non-standard colour temperatures.

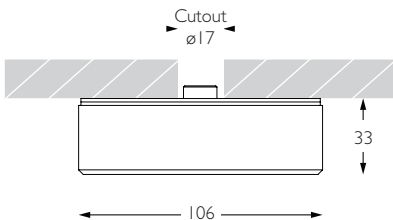


Domino 4 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

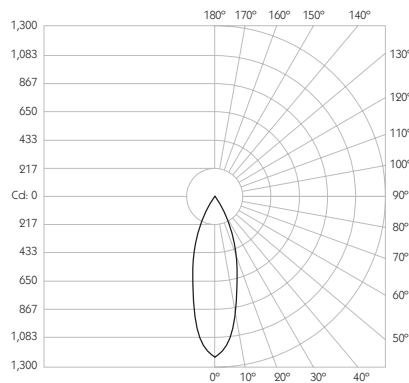

8.8W C3		3000K LED	
1m	0.60m	1,268 lx	
2m	1.20m	317 lx	
3m	1.80m	141 lx	
4m	2.40m	79 lx	
5m	3.00m	50 lx	

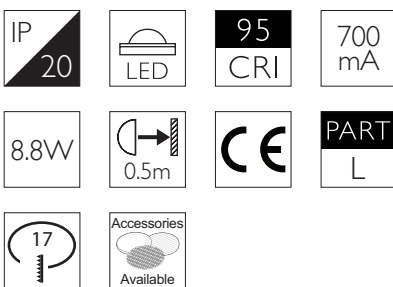

Surface

TZ-654-AL-3095C3

TZ-654-BK-3095C3

TZ-654-WH-3095C3



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.15