
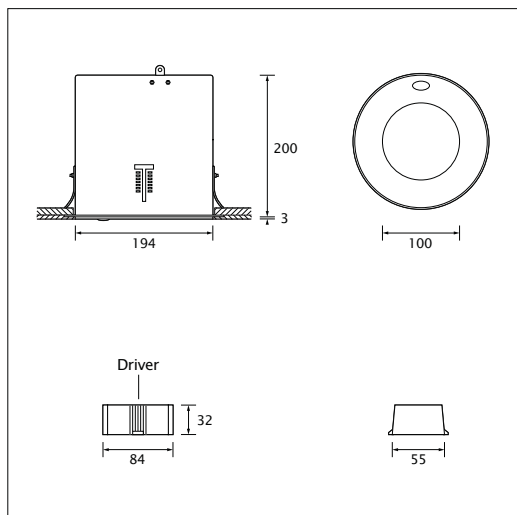




Order Code:

- White [RAL 9010] 71037
- Black [RAL 9005] 71038
- ◐ Custom Finishes Available on Request

Optional Extras (specify when ordering):

- DMX Control Conversion 11711
- DALI Dimming Conversion 11722
- Enable Scenes Control 11733
- Ext. Dimmer Conversion 11755



20W 8°	3000K LED
1m 0.14m	51000 lx
2m 0.28m	12750 lx
3m 0.42m	5667 lx
4m 0.56m	3188 lx
5m 0.70m	2040 lx

Construction

Stainless steel, die-cast aluminium and polymer fixture, powder coated; Mild steel mounting ring, powder coated

Mounting

Lamp Type

LED Lamp Power

Beam Width

Colour Temperature

Chip Luminous Flux (min)

Absolute Output

Light Output Ratio

Colour Rendering Index

LED Input

Diode Type

Max. Ambient Temperature

Voltage

Control Gear

Dimming Options

LED

20W

8°

3,000K²

1130.67lm

1164lm

1.0³

90+

700mA

Cree XP-E2

40°C

220-240V; 50/60Hz

External LED driver

1. Internal dimmer 0-100% (as standard)

2. External dimmer (trailing edge); specify when ordering⁴

Interior use only

(w)500 x (l)500 x (h)250mm

35mm

Ø195mm

+/- 175° Pan; +/- 35° Tilt

White RAL 9010, Black RAL 9005

2.96kg (including LED head)

Optional extra; specify when ordering

1. Handheld remote (ref: 11400)

2. DMX

3. DALI (dimming only)

DMX or DALI requires setup (with additional costs) and must be specified when ordering.

Place of Use

Min. Ceiling Clearance

Max. Ceiling Thickness

Ceiling Cutout

Movement

Weight

Scene Control

Control Options

Notes

- Luminaire is fixed in place using trimless mounting ring and must be installed before plastering.
- 3000K as standard. Other colour temperatures available on request.
- Due to LED flux binning, the Light Output Ratio is calculated on minimum luminous flux data. In actuality, chips place tend to have a higher flux level.
- If external dimming is specified, product cannot be dimmed internally. When external dimmer is used, the lamp dims normally, motors operate down to 50% dimming.