
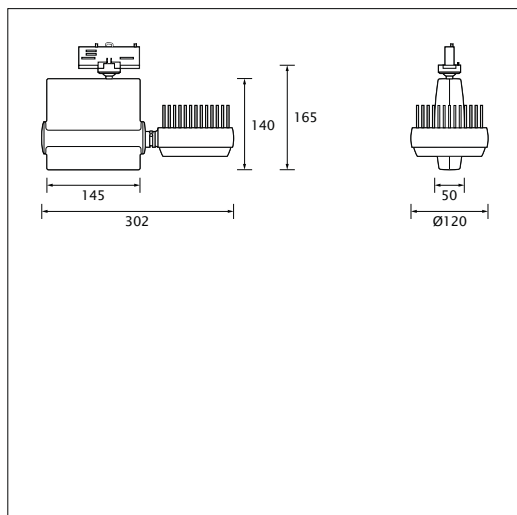




Order Code:

- White [RAL 9010] **21018**
- Black [RAL 9005] **21019**
- ◐ Custom Finishes Available on Request

Optional Extras (specify when ordering):

- DMX** DMX Control Conversion **11211**
- Enable Scenes Control** **11233**
- Ext. Dimmer Conversion** **11255**



20W 11°	3000K LED
1m 0.19m	22797 lx
2m 0.38m	5700 lx
3m 0.58m	2533 lx
4m 0.77m	1425 lx
5m 0.96m	912 lx

Construction

Mounting

Lamp Type

LED Lamp Power

Beam Width

Colour Temperature

Chip Luminous Flux (min)

Absolute Output

Light Output Ratio

Colour Rendering Index

LED Input

Diode Type

Max. Ambient Temperature

Voltage

Control Gear

Dimming Options

Place of Use

Movement

Finish

Weight

Scene Control

Control Options

Die-cast aluminium housing, powder coated

3-Circuit track compatible with the Eutrac 3-Circuit adaptor¹

LED

20W

11°

3,000K²

1130.67lm

1040lm

0.92

90+

700mA

Cree XP-E2

40°C

220-240V; 50/60Hz³

Integral LED driver

1. Internal dimmer 0-100% (as standard)

2. External dimmer (trailing edge); specify when ordering⁴

Interior use only

+/- 160° Pan; +/- 90° Tilt

White RAL 9010, Black RAL 9005

1.61kg (including LED head)

Optional extra; specify when ordering

1. Handheld remote (ref: 11400)

2. DMX

DMX requires setup (with additional costs) and must be specified when ordering. The data signals must be supplied via Eutrac track with data bus.

Notes

- 3-Circuit track as standard. Other track adaptor types, including 1-Circuit, available on request. Specify track type when ordering.
- 3000K as standard. Other colour temperatures available on request.
- 50Hz as standard. For 60Hz, specify when ordering.
- If external dimming is specified, product cannot be dimmed internally. When external dimmer is used, the lamp dims normally, motors operate down to 50% dimming.

