
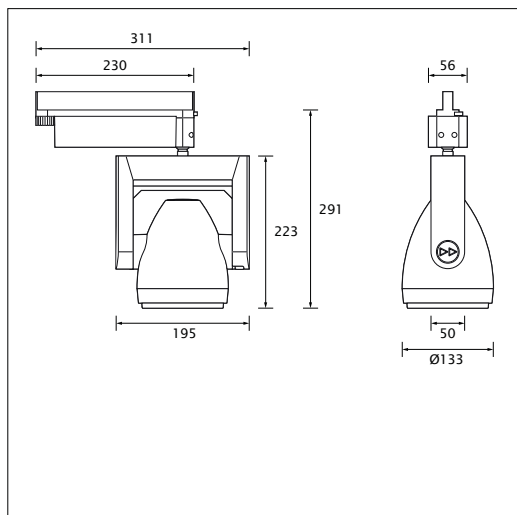




Order Code:

- White [RAL 9010] 81150
- Black [RAL 9005] 81151

Optional Extras (specify when ordering):

-  DMX Control Conversion 11811
-  DALI Dimming Conversion 11822
-  Enable Scenes Control 11833
-  Ext. Dimmer Conversion 11855



27W 11°	3000K LED
1m 0.38m	8310 lx
2m 0.78m	2077 lx
3m 1.17m	923 lx
4m 1.56m	519 lx
5m 1.94m	332 lx

Download photometric files at www.rclighting.com/photometrics

Construction

Die-cast aluminium lamp housing, powder coated;
Injection molded plastic housing

Mounting

3-circuit eurotrack¹

Voltage

220-240V; 50/60Hz

Light Source

Xicato Artist LED

Distribution

11°

Colour Temperature

3,000K²

Colour Rendering

CRI ≥95

Circuit Watts

27W

Absolute Output

1300lm

LED Input

1A

Control Gear

Integral LED driver

Place of Use

Interior use only

Ambient Temperature

35°C Max

Movement

+/- 165° Pan; +/- 90° Tilt

Finish

White RAL 9010, Black RAL 9005

Weight

1.85kg

Dimming Options

1. Internal dimmer 0-100% (as standard)
2. External dimmer (trailing edge); specify when ordering³
3. DALI Dimming⁵

Control Options

1. Handheld remote (ref. 11400)
2. DMX (including iDirect)⁴
3. DALI Dimming⁵

Scene Control

Optional extra; specify when ordering

Notes

1. Compatible with Eutrac 3-Circuit adaptor. Specify track type when ordering.
2. Alternative colour temperatures available on request.
3. If external dimming is specified, product cannot be dimmed via handheld controller. Motors do not operate below 50% power.
4. DMX requires setup and must be specified when ordering. Data signal must be supplied via Eutrac track with data bus.
5. Dimming via DALI dimmable driver and must be specified when ordering.