
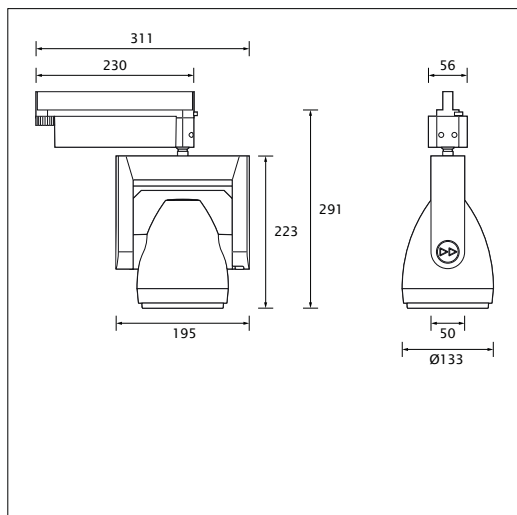




Order Code:

- White [RAL 9010] **81150**
- Black [RAL 9005] **81151**

Optional Extras (specify when ordering):

-  DMX Control Conversion **11811**
-  DALI Dimming Conversion **11822**
-  Enable Scenes Control **11833**
-  Ext. Dimmer Conversion **11855**



27W 19°	3000K LED
1m 0.69m	4341 lx
2m 1.38m	1085 lx
3m 2.07m	482 lx
4m 2.75m	271 lx
5m 3.44m	173 lx

Download photometric files at www.rclighting.com/photometrics

Construction

Die-cast aluminium lamp housing, powder coated;
Injection molded plastic housing

Mounting

3-circuit eurotrack¹

Voltage

220-240V; 50/60Hz

Light Source

Xicato Artist LED

Distribution

19°

Colour Temperature

3,000K²

Colour Rendering

CRI ≥95

Circuit Watts

27W

Absolute Output

1300lm

LED Input

1A

Control Gear

Integral LED driver

Place of Use

Interior use only

Ambient Temperature

35°C Max

Movement

+/- 165° Pan; +/- 90° Tilt

Finish

White RAL 9010, Black RAL 9005

Weight

1.85kg

Dimming Options

1. Internal dimmer 0-100% (as standard)
2. External dimmer (trailing edge); specify when ordering³
3. DALI Dimming⁵

Control Options

1. Handheld remote (ref. 11400)
2. DMX (including iDirect)⁴
3. DALI Dimming⁵

Scene Control

Optional extra; specify when ordering

Notes

1. Compatible with Eutrac 3-Circuit adaptor. Specify track type when ordering.
2. Alternative colour temperatures available on request.
3. If external dimming is specified, product cannot be dimmed via handheld controller. Motors do not operate below 50% power.
4. DMX requires setup and must be specified when ordering. Data signal must be supplied via Eutrac track with data bus.
5. Dimming via DALI dimmable driver and must be specified when ordering.