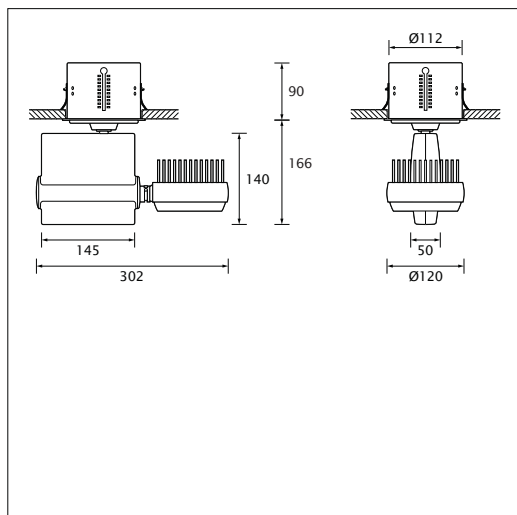


Order Code:

○ White [RAL 9010] 21094

● Black [RAL 9005] 21095




◐ Custom Finishes Available on Request

Optional Extras (specify when ordering):

DMX512 DMX Control Conversion 11211

∞ Enable Scenes Control 11233

EXTERNAL Ext. Dimmer Conversion 11255



Distance (m)	Beam Diameter (m)	Light Output (lx)
1m	0.4m	5970 lx
2m	0.9m	1493 lx
3m	1.3m	664 lx
4m	1.7m	373 lx
5m	2.1m	239 lx

Construction

Mounting

Lamp Type

LED Lamp Power

Beam Width

Colour Temperature

Chip Luminous Flux (min)

Absolute Output

Light Output Ratio

Colour Rendering Index

LED Input

Diode Type

Max. Ambient Temperature

Voltage

Control Gear

Dimming Options

Place of Use

Min. Ceiling Clearance

Max. Ceiling Thickness

Ceiling Cutout

Movement

Finish

Weight

Scene Control

Control Options

Die-cast aluminium housing, powder coated

Monopoint¹

LED

20W

24°

3,000K²

1130.67lm

945lm

0.84

90+

700mA

Cree XP-E2

40°C

220-240V; 50/60Hz³

Triac dimmable-driver

1. Internal dimmer 0-100% (as standard)

2. External dimmer (trailing edge); specify when ordering⁴

Interior use only

200mm

50mm

±Ø115mm

+/- 160° Pan; +/- 90° Tilt

White RAL 9010, Black RAL 9005

2.11kg (including LED head)

Optional extra; specify when ordering

1. Handheld remote (ref: 11400)

2. DMX

DMX requires setup (with additional costs) and must be specified when ordering.

Notes

1. Monopoint is fixed in place using mounting ring.

2. 3000K as standard. Other colour temperatures available on request.

3. 50Hz as standard. For 60Hz, specify when ordering.

4. If external dimming is specified, product cannot be dimmed internally. When external dimmer is used, the lamp dims normally, motors operate down to 50% dimming.

