
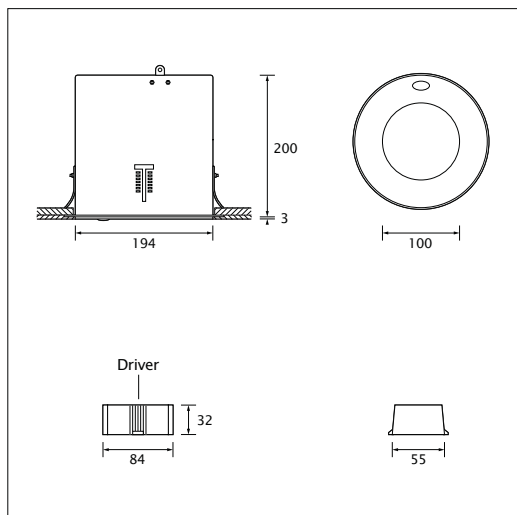




Order Code:

- White [RAL 9010] 71043
- Black [RAL 9005] 71044
- ◐ Custom Finishes Available on Request

Optional Extras (specify when ordering):

- DMX512** DMX Control Conversion 11711
- DALI** DALI Dimming Conversion 11722
- ∞** Enable Scenes Control 11733
- EXTERNAL** Ext. Dimmer Conversion 11755



20W 24°	3000K LED
1m	0.4m 5970 lx
2m	0.9m 1493 lx
3m	1.3m 664 lx
4m	1.7m 373 lx
5m	2.1m 239 lx

Construction

Stainless steel, die-cast aluminium and polymer fixture, powder coated; Mild steel mounting ring, powder coated

Mounting

Lamp Type

LED

LED Lamp Power

20W

Beam Width

24°

Colour Temperature

3,000K²

Chip Luminous Flux (min)

1130.67lm

Absolute Output

945lm

Light Output Ratio

0.84

Colour Rendering Index

90+

LED Input

700mA

Diode Type

Cree XP-E2

Max. Ambient Temperature

40°C

Voltage

220-240V; 50/60Hz

Control Gear

External LED driver

Dimming Options

1. Internal dimmer 0-100% (as standard)
2. External dimmer (trailing edge); specify when ordering³

Place of Use

Interior use only

Min. Ceiling Clearance

(w)500 x (l)500 x (h)250mm

Max. Ceiling Thickness

35mm

Ceiling Cutout

Ø195mm

Movement

+/- 175° Pan; +/- 35° Tilt

Finish

White RAL 9010, Black RAL 9005

Weight

2.96kg (including LED head)

Scene Control

Optional extra; specify when ordering

Control Options

1. Handheld remote (ref: 11400)
 2. DMX
 3. DALI (dimming only)
- DMX or DALI requires setup (with additional costs) and must be specified when ordering.

Notes

1. Luminaire is fixed in place using trimless mounting ring and must be installed before plastering.
2. 3000K as standard. Other colour temperatures available on request.
3. If external dimming is specified, product cannot be dimmed internally. When external dimmer is used, the lamp dims normally, motors operate down to 50% dimming.