



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 9.8W

Module Output 712lm

Absolute Output 678lm

LOR 95%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12°

Gear Type Dimmable options available


Weight 530g

* Please enquire as to the availability of non-standard Colour Temperatures.

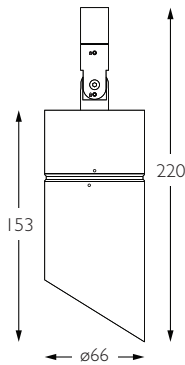


Designed around the classical proportions of the golden ratio, Evo X16 is a 95CRI LED spotlight. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three tool-less interchangeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Evo X16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.8W.

Product Photometry independently tested in accordance with LM-79

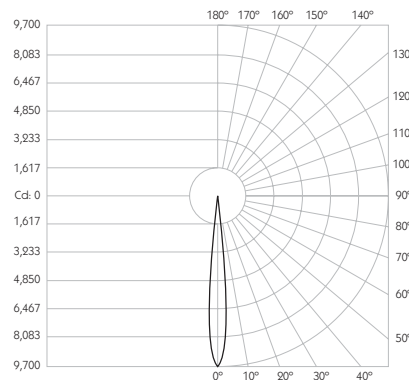

Distance	Beam Diameter	Footcandle (lx)
1m	0.21m	9,600 lx
2m	0.42m	2,400 lx
3m	0.63m	1,067 lx
4m	0.84m	600 lx
5m	1.05m	384 lx

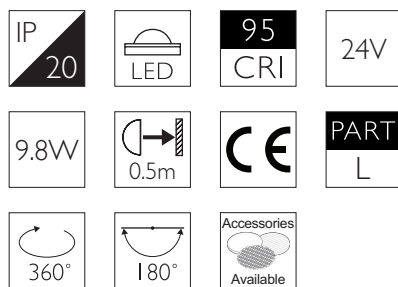

System	Part Number	Part Number	Part Number	Part Number	Part Number	Part Number	Part Number	Part Number
Cable	BT-471-AL-309512	RT-471-AL-309512	EUT3-471-AL-309512	MPS-471-AL-309512	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Finish								
Black		RT-471-BK-309512	EUT3-471-BK-309512	MPS-471-BK-309512		MPX-471-BK-309512	MPY-471-BK-309512	MPZ-471-BK-309512
White	RT-471-WH-309512		EUT3-471-WH-309512	MPS-471-WH-309512		MPX-471-WH-309512	MPY-471-WH-309512	MPZ-471-WH-309512



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 9.8W

Module Output 712lm

Absolute Output 678lm

LOR 95%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 20°

Gear Type Dimmable options available


Weight 530g

* Please enquire as to the availability of non-standard Colour Temperatures.

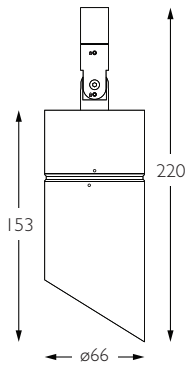


Designed around the classical proportions of the golden ratio, Evo X16 is a 95CRI LED spotlight. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three tool-less interchangeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Evo X16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.8W.

Product Photometry independently tested in accordance with LM-79

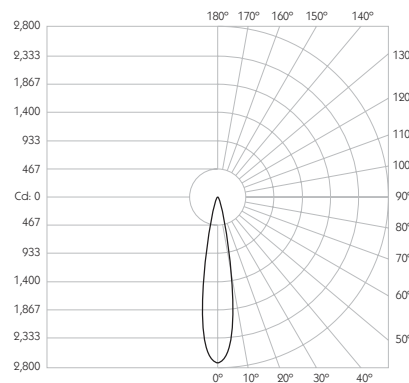

9.8W 20°	3000K LED
1m 0.35m	2,731 lx
2m 0.71m	683 lx
3m 1.06m	303 lx
4m 1.41m	171 lx
5m 1.76m	109 lx

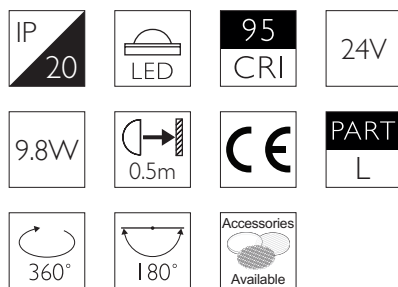

Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
BT-471-AL-309520	RT-471-AL-309520	EUT3-471-AL-309520	MPS-471-AL-309520	MPX-471-AL-309520	MPY-471-AL-309520	MPZ-471-AL-309520		
	RT-471-BK-309520	EUT3-471-BK-309520	MPS-471-BK-309520	MPX-471-BK-309520	MPY-471-BK-309520	MPZ-471-BK-309520		
	RT-471-WH-309520	EUT3-471-WH-309520	MPS-471-WH-309520	MPX-471-WH-309520	MPY-471-WH-309520	MPZ-471-WH-309520		



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

System Power 9.8W

Module Output 712lm

Absolute Output 672lm

LOR 94%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 40°

Gear Type Dimmable options available


Weight 530g

* Please enquire as to the availability of non-standard Colour Temperatures.

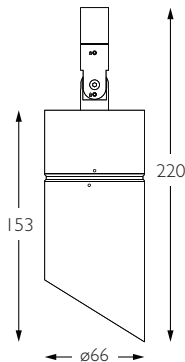


Designed around the classical proportions of the golden ratio, Evo X16 is a 95CRI LED spotlight. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three tool-less interchangeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Evo X16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.8W.

Product Photometry independently tested in accordance with LM-79

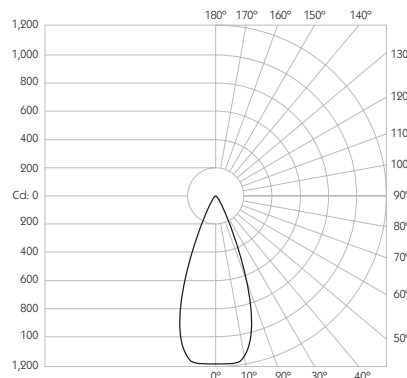

Distance (m)	Beam Diameter (m)	Footcandle (lx)
1m	0.73m	1,157 lx
2m	1.46m	289 lx
3m	2.18m	129 lx
4m	2.91m	72 lx
5m	3.64m	46 lx

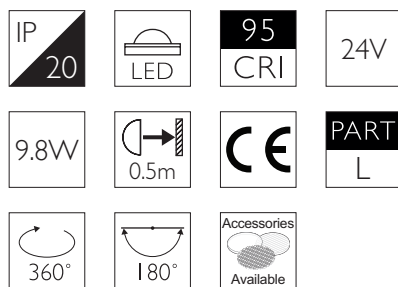

Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
BT-471-AL-309540	RT-471-AL-309540	EUT3-471-AL-309540	MPS-471-AL-309540	MPX-471-AL-309540	MPY-471-AL-309540	MPZ-471-AL-309540		
	RT-471-BK-309540	EUT3-471-BK-309540	MPS-471-BK-309540	MPX-471-BK-309540	MPY-471-BK-309540	MPZ-471-BK-309540		
	RT-471-WH-309540	EUT3-471-WH-309540	MPS-471-WH-309540	MPX-471-WH-309540	MPY-471-WH-309540	MPZ-471-WH-309540		