



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots

System Power 1.9W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K | 2700K | *


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12°

Gear Type Dimmable options available




Weight 60g


* Please enquire as to the availability of non-standard Colour Temperatures.



Pico 1 is a discreet 95CRI LED spotlight. Based on a minimal aesthetic with advanced features and benefits, the spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico 1 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

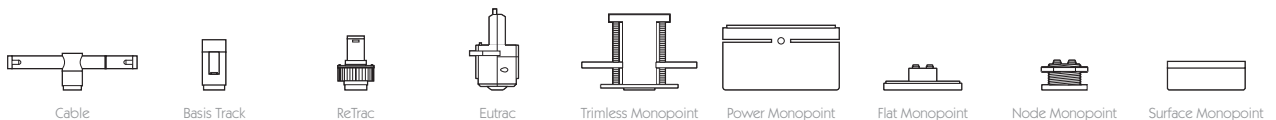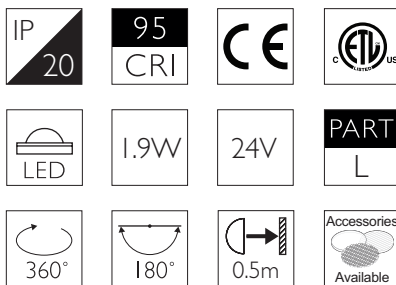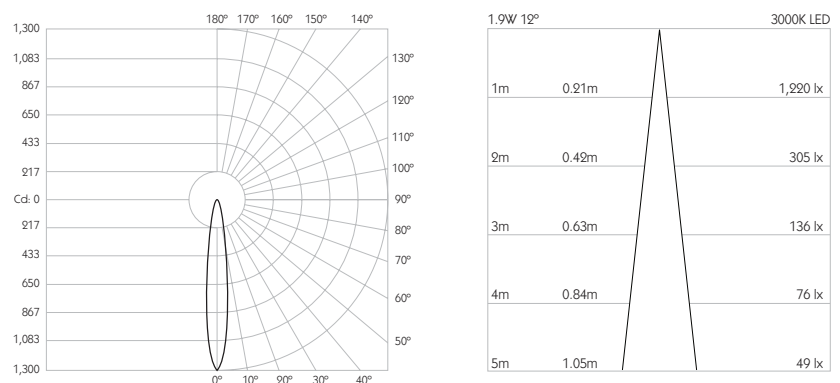

	CA-701-AL-XX9512	BT-701-AL-XX9512	RT-701-AL-XX9512	EUT3-701-AL-XX9512	MPS-701-AL-XX9512	MPX-701-AL-XX9512	MPY-701-AL-XX9512	MPZ-701-AL-XX9512
			RT-701-BK-XX9512	EUT3-701-BK-XX9512	MPS-701-BK-XX9512	MPX-701-BK-XX9512	MPY-701-BK-XX9512	MPZ-701-BK-XX9512
			RT-701-WH-XX9512	EUT3-701-WH-XX9512	MPS-701-WH-XX9512	MPX-701-WH-XX9512	MPY-701-WH-XX9512	MPZ-701-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots

System Power 1.9W

Module Output 140lm

Absolute Output 119lm

LOR 85%

Colour Temperature 3000K | 2700K | *


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 30°

Gear Type Dimmable options available





Weight 60g

* Please enquire as to the availability of non-standard Colour Temperatures.



Pico 1 is a discreet 95CRI LED spotlight. Based on a minimal aesthetic with advanced features and benefits, the spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico 1 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

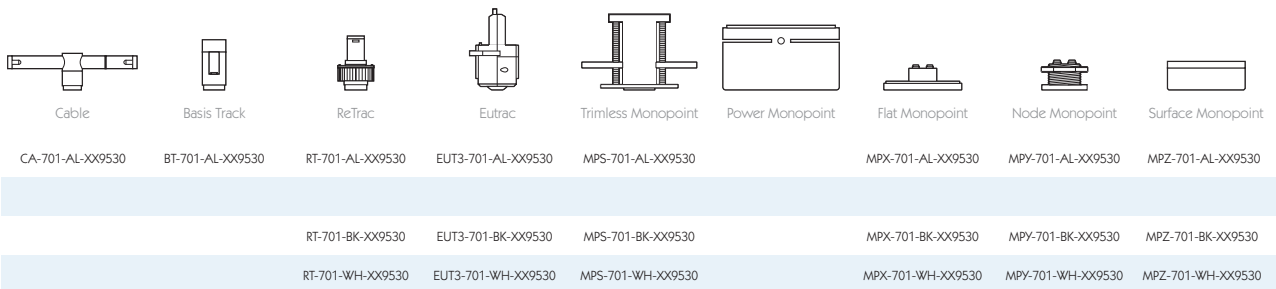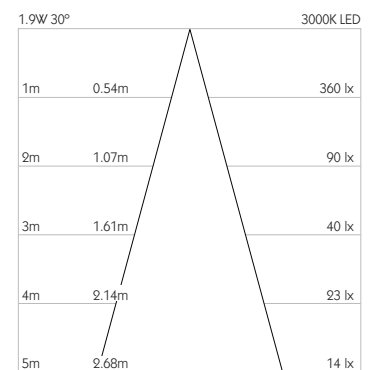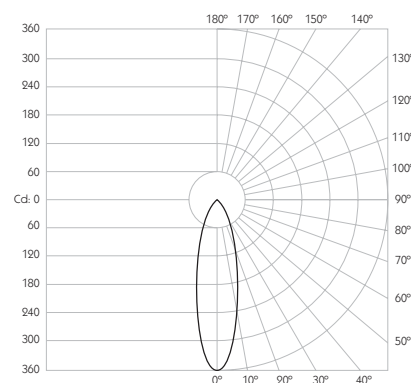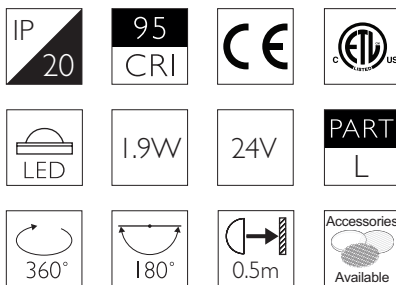

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

Accessories Snoots

System Power 1.9W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K | 2700K | *


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 60°

Gear Type Dimmable options available




Weight 60g

* Please enquire as to the availability of non-standard Colour Temperatures.



Pico 1 is a discreet 95CRI LED spotlight. Based on a minimal aesthetic with advanced features and benefits, the spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico 1 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

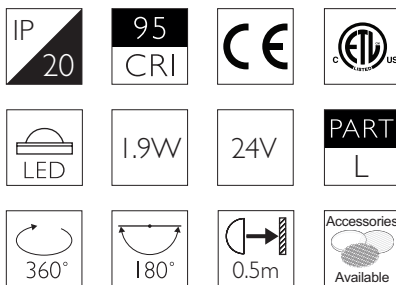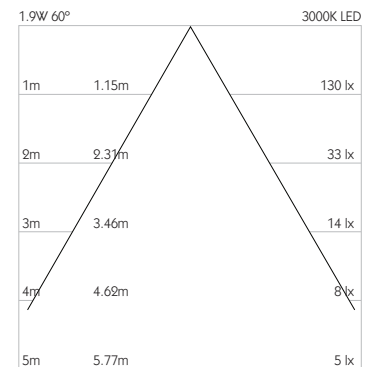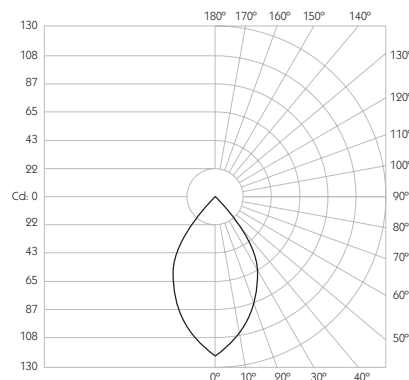

	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Grey	CA-701-AL-XX9560	BT-701-AL-XX9560	RT-701-AL-XX9560	EUT3-701-AL-XX9560	MPS-701-AL-XX9560		MPX-701-AL-XX9560	MPY-701-AL-XX9560	MPZ-701-AL-XX9560
Black									
White									

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27