



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

System Power 1.9W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 12°

Gear Type Dimmable options available

Weight 75g





Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.



Pico Plus is a discreet 95CRI LED, based on the minimal aesthetic of the Pico 1, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes and has three site changeable optics for flexible distribution. Movement is aided by a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico Plus is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

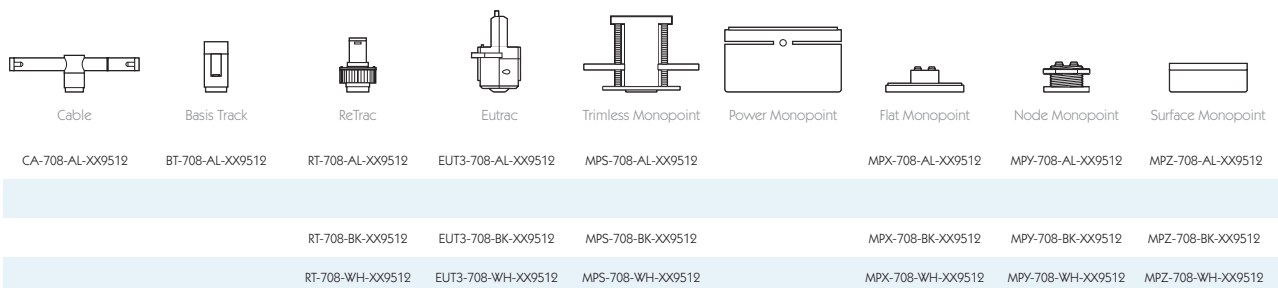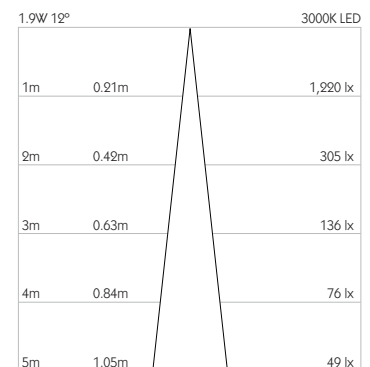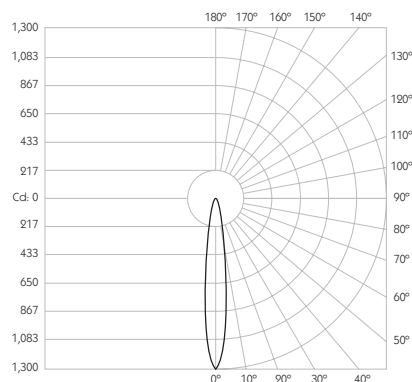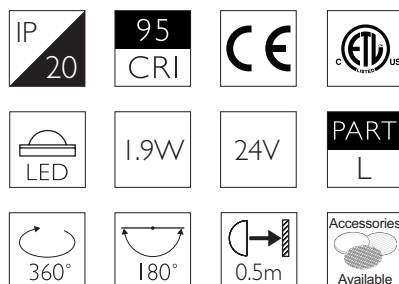

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

System Power 1.9W

Module Output 140lm

Absolute Output 119lm

LOR 85%

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 30°

Gear Type Dimmable options available

Weight 75g


Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.




Pico Plus is a discreet 95CRI LED, based on the minimal aesthetic of the Pico 1, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes and has three site changeable optics for flexible distribution. Movement is aided by a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico Plus is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

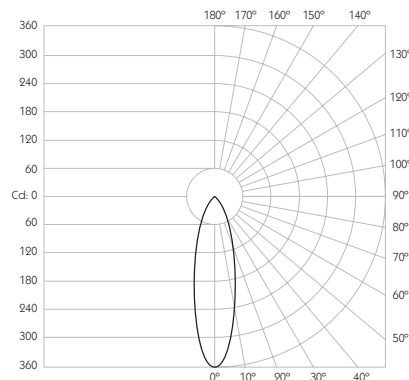

1.9W 30°		3000K LED
1m	0.54m	360 lx
2m	1.07m	90 lx
3m	1.61m	40 lx
4m	2.14m	23 lx
5m	2.68m	14 lx

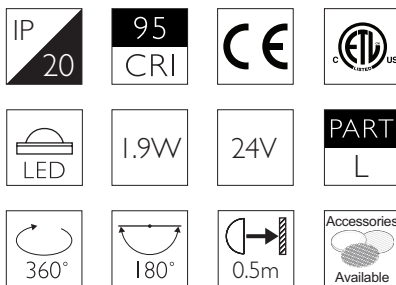

	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Grey	CA-708-AL-XX9530	BT-708-AL-XX9530	RT-708-AL-XX9530	EUT3-708-AL-XX9530	MPS-708-AL-XX9530		MPX-708-AL-XX9530	MPY-708-AL-XX9530	MPZ-708-AL-XX9530
Black									
White									

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Eutrac | Monopoint | LV tracks

Lockable Pan & Tilt

System Power 1.9W

Module Output 140lm

Absolute Output 130lm

LOR 93%

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 60°

Gear Type Dimmable options available

Weight 75g



Accessory Dimensions ø20mm x 2mm | Lenses ordered on request

* Please enquire as to the availability of non-standard Colour Temperatures.



Pico Plus is a discreet 95CRI LED, based on the minimal aesthetic of the Pico 1, but with the additional capability of holding accessory lenses. The spotlight comes as standard in white, black and brushed aluminium finishes and has three site changeable optics for flexible distribution. Movement is aided by a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico Plus is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

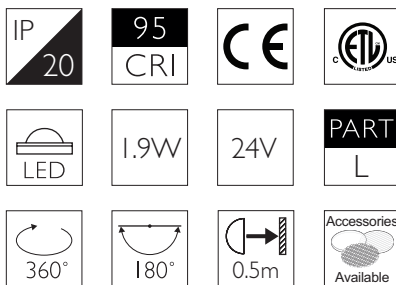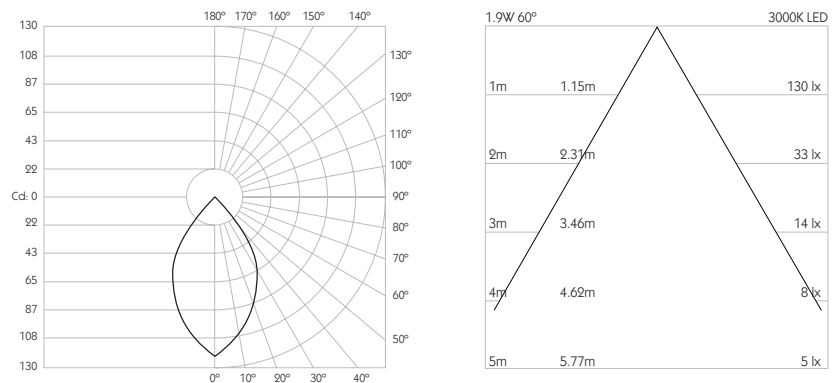

	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Grey	CA-708-AL-XX9560	BT-708-AL-XX9560	RT-708-AL-XX9560	EUT3-708-AL-XX9560	MPS-708-AL-XX9560		MPX-708-AL-XX9560	MPY-708-BK-XX9560	MPZ-708-AL-XX9560
Black									
White									

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27