




Gola 95 Ceiling Stand Alone



G9NS1128-903000D010

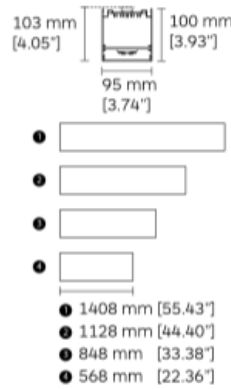

DESCRIPTION

Surface mounted linear luminaire system. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm). System versions can be configured into linear I, 90 L, T and X shapes or others custom configurations. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

MOUNTING

Indoor Lighting - System

OPTIC

Acrylic opal white diffuser.

ELECTRICAL / LED DRIVER

D0 - No Dimming

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE:	LED Built-in with body - Gola LED Module 1128 - LED Module
SDCM:	
CCT:	30 - 3000K
CRI:	90
SYSTEM POWER:	53.68
DELIVERED LUMEN:	7920lm
IP:	40
Notes:	



ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G9NS	1128	-	90	30 - 3000K	00	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----