

PROJECT

TYPE

QUANTITY

LOCATION



**Luminaire: FLO360**

Materials: Chrome plated aluminium, extruded aluminium core, PMMA diffusers, glass  
 Finish: Semi-Mirror finish glass  
 Lengths: See drawing  
 Accessories: Ceiling fixing plates  
 Formats: RGB Dynamic  
 Lens: Semi transparent glass

This signature product requires a Vexica Wi-Fi iOS control App to operate. The product is capable of out putting preset dynamic LED effects, single colours and a palette of white colours. As a LED pendant light the product must be fixed to a ceiling. The remote power supply unit is to be located above in the ceiling void. Universal input from 110VAC to 240 VAC.

This product connects to a Wi-Fi router of your choice and then will allow you to add lights to the unique FLO network.


Control can be provided to individual lights or to a group of FLO products.

Contact Vexica for more details.

**Technical**


<b>Luminaire Voltage</b>	110 to 240 VAC	<b>Actual Power consumption</b>	up to 50 w
<b>Remote Driver Type</b>	5v output PSU	<b>Lumen Maintainence</b>	LM80 LED's at L70
<b>Connections</b>	mains cable into LED PSU	<b>Operating Temperature</b>	-10 to + 35
<b>Number of LEDs</b>	186	<b>LED Pitch mm</b>	8.8
<b>IP rating</b>	Indoor dry location only	<b>Listings</b>	CE
<b>Dimensions (MM)</b>	see drawing	<b>Weight (KG)</b>	2.5 kg

Images

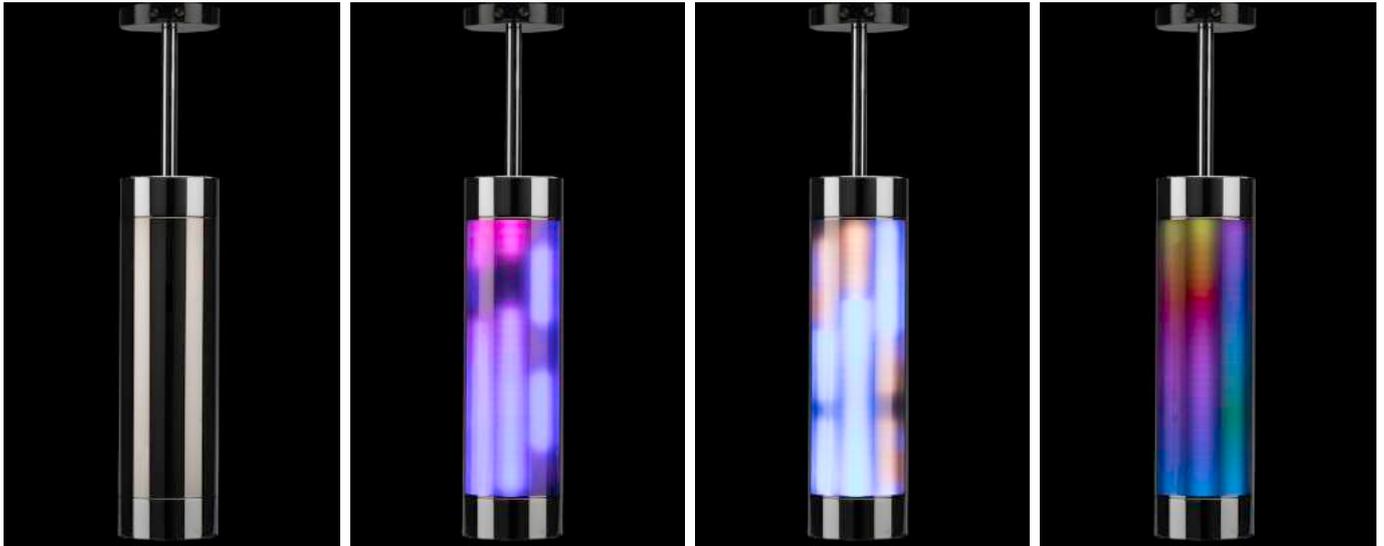

off state image

Dimensions

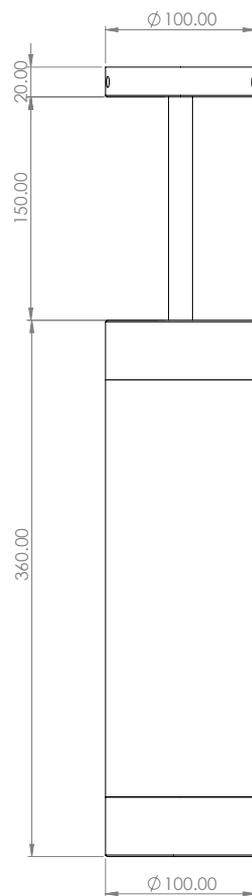

Order code: FLO360-Pendant-RGB