


Iride 62 Adjustable - Trim



5338BC22-903016D010

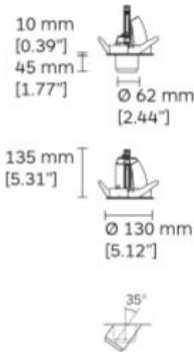

Ø116 mm

DESCRIPTION

Round mounting trim in cast aluminum with springs for trim installation on a ceiling thickness of 1-25mm. Luminaire body in cast aluminium and thermoplastic materials. The fully retractable light head is tiltable with up to 35° (Iride 60) or 30° (Iride 85) and rotatable horizontally 350°.

MOUNTING

Indoor Lighting - Recessed

OPTIC

Reflector + diffuser. Narrow, medium and wide beam angle available.

ELECTRICAL / LED DRIVER

D0 - No Dimming

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Citizen - COB

SDCM:

CCT: 30 - 3000K

CRI: 90




SYSTEM POWER: 19.5696

DELIVERED LUMEN: 1488.922lm

IP: 20

Notes:

ACCESSORIES

	Coloured Filters	2C46
	Linear Spread	2C45
	Honeycomb Louvre	2065



ORDERING CODE

Follow the steps to specify your fixture final code, example: RE61MB13-803020DL11

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
5338	BC22	-	90	30 - 3000K	16	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----