




## Miniluce 900 Pendant

7115BM11-903000D075

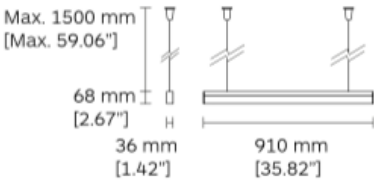

### DESCRIPTION

Pendant mounted linear luminaire with luminaire body in extruded aluminium. End caps in cast aluminium, diffuser made of satin opal acrylic. Supplied with ceiling canopy, pre-installed 1.5m electrical cable and with 1.5m pendant steel wires. Available in 3 different length.

### MOUNTING

Indoor Lighting - Pendant

### OPTIC

Equipped with acrylic satin opal diffuser.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Samsung - SMD

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 28.6

DELIVERED LUMEN: 2620.8lm

IP: 20

Notes:



### ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
7115	BM11	-	90	30 - 3000K	00	D0	75 - Grey (RAL 9006)

### NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----