




## Gola 40 Ceiling Initial/End



## G4NI1128-903000D010

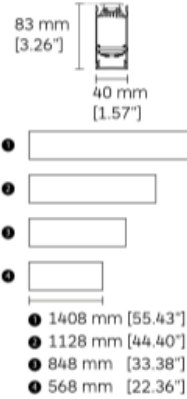

### DESCRIPTION

Surface mounted linear luminaire system. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm). System versions can be configured into linear I, 90 L, T and X shapes or others custom configurations. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

### MOUNTING

Indoor Lighting - System

### OPTIC

Acrylic opal white diffuser.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G4NI	1128	-	90	30 - 3000K	00	D0	10 - Black

### NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE:	LED Built-in with body - Gola LED Module 1128 - LED Module
SDCM:	
CCT:	30 - 3000K
CRI:	90
SYSTEM POWER:	26.84
DELIVERED LUMEN:	3960lm
IP:	40
Notes:	





## Gola 40 Ceiling Middle



## G4NB1128-903000D010



### DESCRIPTION

Surface mounted linear luminaire system. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm). System versions can be configured into linear I, 90 L, T and X shapes or others custom configurations. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

### MOUNTING

Indoor Lighting - System

### OPTIC

Acrylic opal white diffuser.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Gola LED Module 1128 - LED Module

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 26.84

DELIVERED LUMEN: 3960lm

IP: 40

Notes:



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G4NB	1128	-	90	30 - 3000K	00	D0	10 - Black

### NOTES:

We reserve the right to change specifications without prior notification.


HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----



## Gola 40 Ceiling Stand Alone



## G4NS1128-903000D010

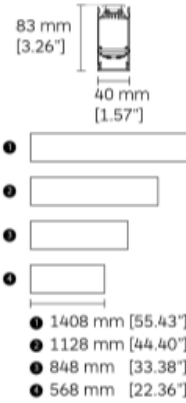

### DESCRIPTION

Surface mounted linear luminaire system. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm). System versions can be configured into linear I, 90 L, T and X shapes or others custom configurations. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

### MOUNTING

Indoor Lighting - System

### OPTIC

Acrylic opal white diffuser.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE:	LED Built-in with body - Gola LED Module 1128 - LED Module
SDCM:	
CCT:	30 - 3000K
CRI:	90
SYSTEM POWER:	26.84
DELIVERED LUMEN:	3960lm
IP:	40
Notes:	



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G4NS	1128	-	90	30 - 3000K	00	D0	10 - Black

### NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----