


Path Bandit



Order Code	Path Bandit.col temp.finish
Example	Path Bandit.3000K.alu

Materials:	Aluminium
Lamp:	MSL Star (1 x Cree XPE)
IP rating:	IP66
Finish:	Anodised aluminium
Dimming:	1-10V, DMX, DALI or Mains Dim
Supply:	Remote driver required
Locking:	With 1.5mm allen key
Available tilt:	115°
Weight:	0.3kg
Description:	Lockable mini LED pathlight on ground spike
Accessories:	N/A

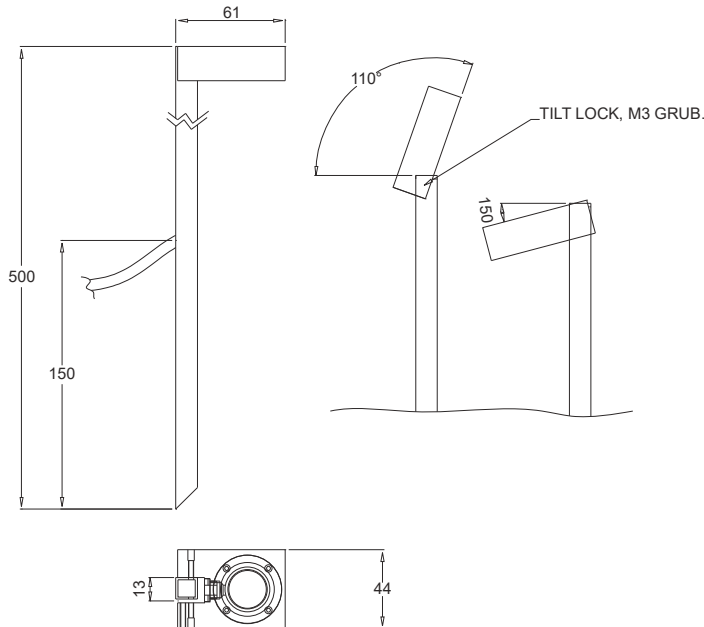

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

Each LED “lamp” consists of one or more CREE XPE power LED thermally bonded to an aluminium cored printed circuit board. White colour temperatures of 2800K, 3000K, 3500K, 5000K and 6500K can be specified as can amber, red, green or blue.



MSL Star

Ø21mm PCB with a single Cree XPE LED. For Ø20mm optics (XPE range).

For driver information see LED driver spec sheet.