


Croc Type X



Order Code	Croc.X.module.reflector.finish
Example	Croc.X.3000K,2160lm.19°.RAL9010

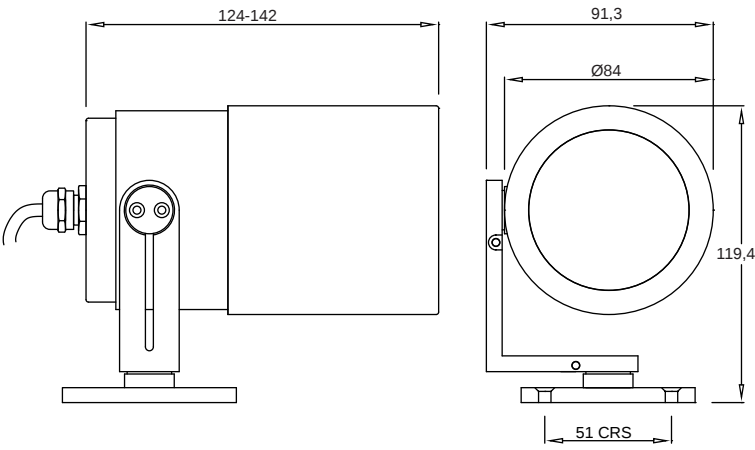

Materials:	Aluminium
Lamp:	Xicato XTM 19mm LES LED Module
Output:	See module compatibility chart available to download from our website
CRI Ra:	≥80 or ≥95 Artist
IP Rating:	IP66
Finish:	Anodised or painted any RAL colour
Dimming:	1-10V, DMX, DALI or Mains Dim
Driver:	Remote driver required
Locking:	2.5mm allen key required
Available Tilt:	± 90°
Weight:	1.35kg
Description:	Xicato LED version of our adjustable and lockable IP66 rated Croc exterior spot
Deviation:	Integral driver
Accessories:	Ø70mm. Please refer to the technical section on our website for reflector information. Takes two accessories (Not suitable for use with spread lenses)

Xicato Thermal Validation Programme approved

LED Information

This product uses the Xicato Module

Technical advantages of the Xicato Module:

- 5 year guarantee
- Colour consistency Initial; 1 x 2 SDCM
- Colour consistency Maintained; 3 SDCM
- Excellent colour rendering
- Uniform beam
- No multiple shadowing

For more information about the modules available please ask sales@mikestoanelighting.com for a current technical data sheet or visit www.xicato.com