


STX2.70 Integral



Order Code	STX2.70.module.reflector.finish
Example	STX2.70.3000K,1300m XIM 19mm LES. 19°.RAL9010

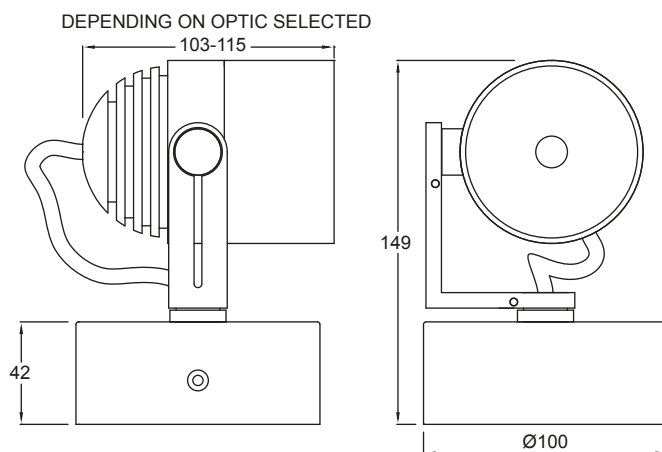

Materials:	Aluminium
Lamp:	Xicato XIM 9mm LES or 19mm LES LED Module
Output:	See table on second page
CRI Ra:	≥80 or ≥95 Artist
Finish:	Anodised or painted to any RAL colour
Dimming:	1-10V, DALI or local potentiometer (Bluetooth 2016)
Supply:	230/240V AC
Locking:	2.5mm allen key required
Available Tilt:	± 90°
Weight:	1kg (TBC)
Description:	Surface mount lockable power LED spotlight using Xicato Module and integral driver
Accessories:	Ø70mm. Please refer to the table on the second page for reflector information. Takes two accessories. Barn door and wall washing attachments are also available

Xicato Thermal Validation Programme Approved

LED Information

This product uses the Xicato Module


Technical advantages of the Xicato Module:

- Colour consistency Initial; 1 x 2 SDCM
- Colour consistency Maintained; 3 SDCM
- Excellent colour rendering
- Uniform beam
- No multiple shadowing


For more information about the modules available please ask sales@mikestoanelighting.com for a current technical data sheet or visit www.xicato.com

Applications

Remote dimming

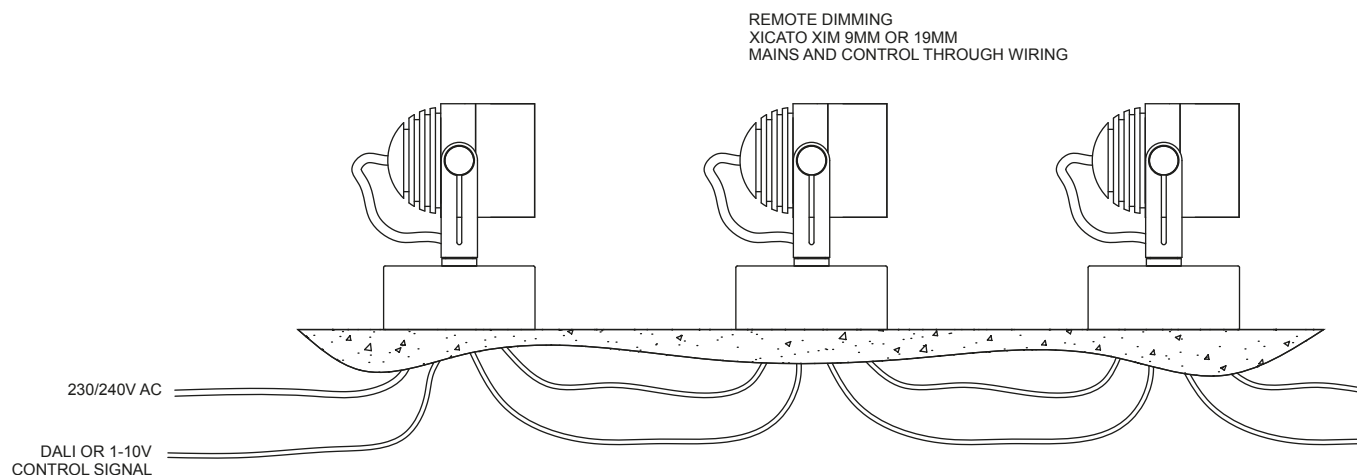

Local dimming

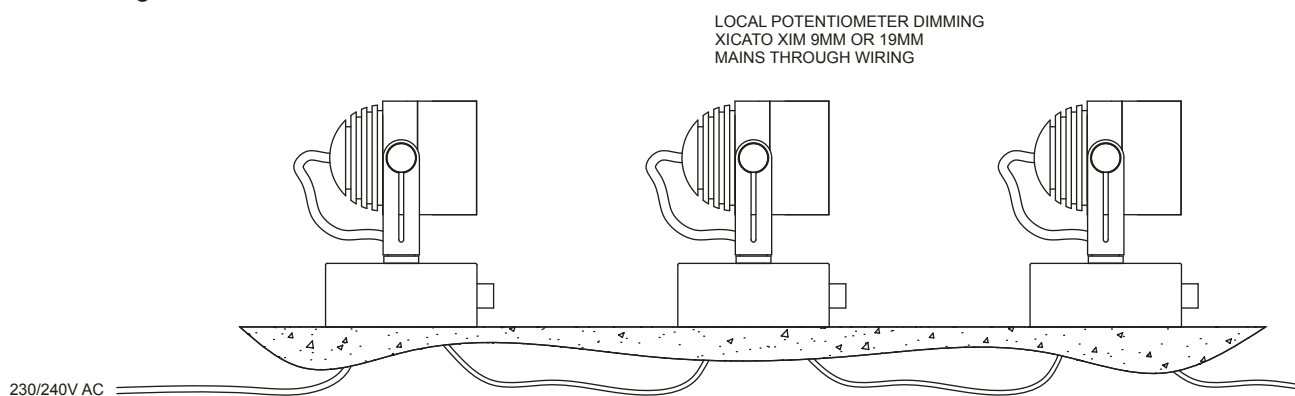

Type	Reflector diameter	Module type	Dimming and control options	Beam options	Max output and CRI
STX2.70 Integral	70mm	Xicato XIM 9mm LES	DALI 1-10V Local (potentiometer)	11° 18° 23° 40.5°	Artist Series 700lm Vibrant Series V95 700lm Standard Series 1300lm Vibrant Series V80 1300lm
		Xicato XIM 19mm LES	DALI 1-10V Local (potentiometer)	20.9° 32.1° 42.3° 56.5°	Artist Series 1300lm Vibrant Series V95 1300lm Standard Series 1300lm Vibrant Series V80 1300lm