


STX2.111 Integral



Order Code	STX2.111.Integral.module.reflector.finish
Example	STX2.111.Integral.XIM 19mm 3000K,3000lm.19°.RAL9010

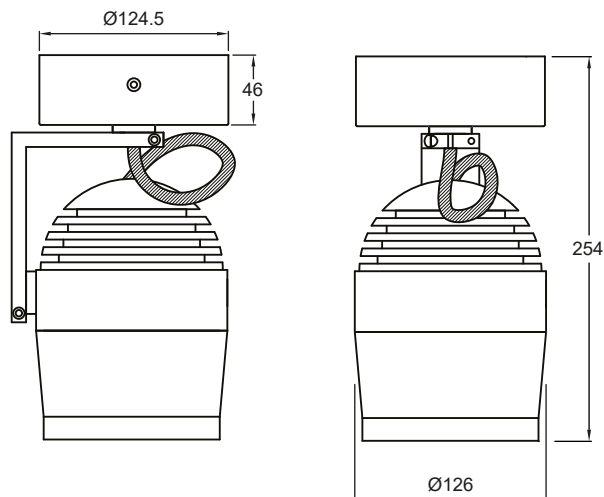

Materials:	Aluminium
Lamp:	Xicato XIM 9mm LES or 19mm LES LED Module
Output:	See table on second page
CRI Ra:	≥80 or ≥95 Artist
Finish:	Anodised or painted to any RAL colour
Dimming:	1-10V or DALI (Bluetooth 2016)
Supply:	48V DC
Locking:	3mm allen key required
Available Tilt:	± 90°
Weight:	2.3kg
Description:	Large surface mount lockable power LED spotlight with high output Xicato module and tight beams with integral PSU
Accessories:	Ø111mm. Please refer to the table on the second page for reflector information. Takes two accessories.

Xicato Thermal Validation Programme Approved

LED Information

This product uses the Xicato Module

Technical advantages of the Xicato Module:


- Colour consistency Initial; 1 x 2 SDCM
- Colour consistency Maintained; 3 SDCM
- Excellent colour rendering
- Uniform beam
- No multiple shadowing

For more information about the modules available please ask sales@mikestoanelighting.com for a current technical data sheet or visit www.xicato.com

Applications


Remote dimming

REMOTE DIMMING
XICATO XIM 9MM OR 19MM
MAINS AND CONTROL THROUGH WIRING

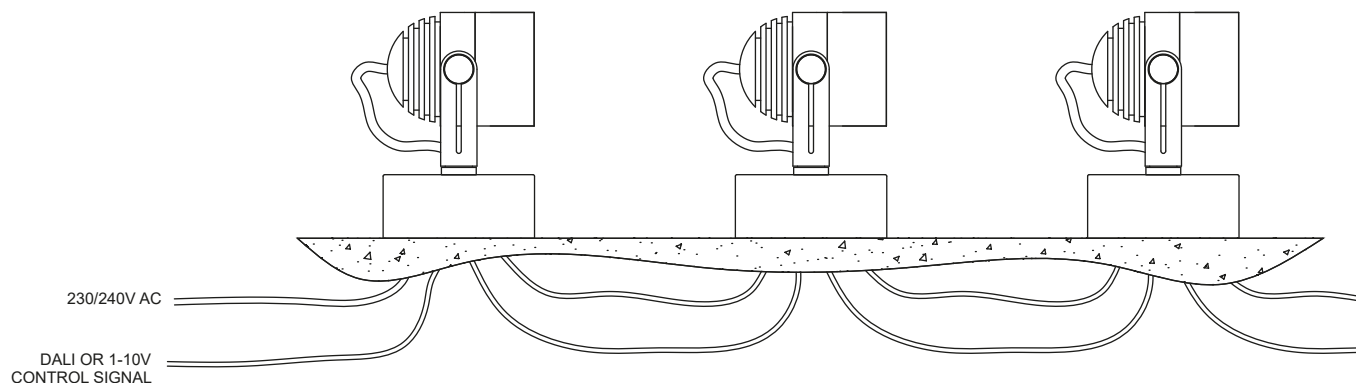

Local dimming

LOCAL POTENTIOMETER DIMMING
XICATO XIM 9MM OR 19MM
MAINS THROUGH WIRING

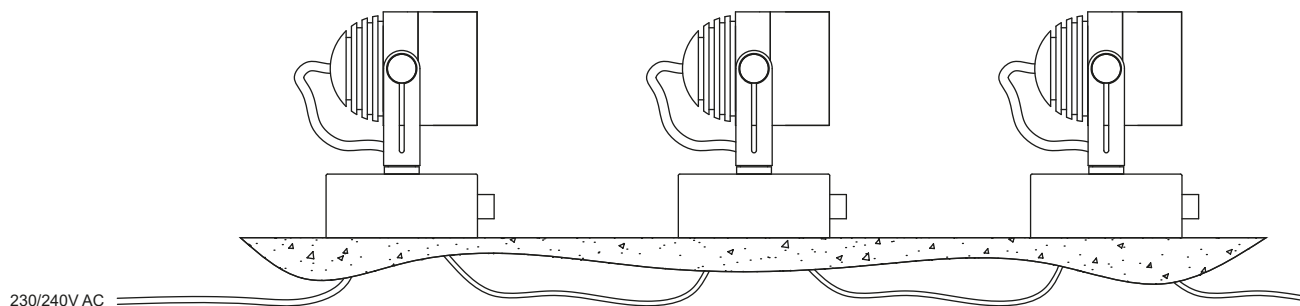

Type	Reflector diameter	Module type	Dimming and control options	Beam options	Max output and CRI
STX2.111 Integral	Ø111mm	Xicato XIM 9mm LES	Local potentiometer Remote DALI Remote 0-10V (Bluetooth Q4 2016)	7.7° 18° 31° 57°	Artist Series 1300lm Vibrant Series V95 1300lm Standard Series 2000lm Vibrant Series V80 2000lm
		Xicato XIM 19mm LES		13.5° 24° 43° 58°	Artist Series 2000lm Vibrant Series V95 2000lm Standard Series 3000lm Vibrant Series V80 3000lm