


## ADL.CP Type K



|            |                                |
|------------|--------------------------------|
| Order Code | ADL.CP.K.col temp.optic.finish |
| Example    | ADL.CP.K.3000K.14.6°.RAL9010   |

|                 |  |
|-----------------|--|
| Materials:      | Aluminium, stainless steel cover plate   |
| Lamp:           | Cree MK-R LED  |
| Colour temp:    | 2700K, 3000K, 4000K  |
| Finish:         | Anodised aluminium or painted any RAL colour                                   |
| Dimming:        | 1-10V, Mains, DMX or DALI  |
| Supply:         | Remote driver required   |
| Cut out:        | Ø92mm cut out required   |
| Locking:        | 3mm allen key required   |
| Available tilt: | ±15°   |
| Weight:         | 0.5kg  |
| Description:    | MK-R version of our adjustable downlight.<br>C/w coverplate to conceal fixings |
| Accessories:    | Ø50mm optics; 14.6°, 33.4°, 13.4°x38.4°  |

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

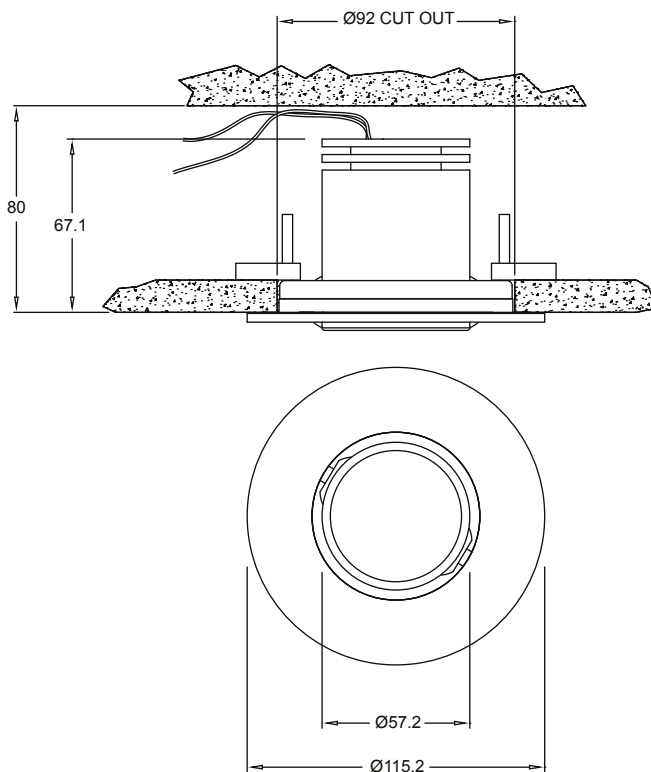

### LED Information

Each LED "lamp" consists of one or more CREE MK-R power LED thermally bonded to an aluminium cored printed circuit board.

Colour temperatures of 2700K, 3000K, 4000K can be specified. Please contact MSL for availability if you require any other colour temperature.

